

HRDH HRDH HRDH

> George Russell Formula 1 driver of the Mercedes-AMG PETRONAS F1 Team

> > Official Tool Expert



6666666





## **POWER X-CHANGE**

Power X-Change   Cordless Excellence.	4
Power X-Change Robot Lawn Mowers without perimeter wire	6
Power X-Change Robot Lawn Mowers	8
Cordless Lawn Mowers	10
Petrol Lawn Mower (Power X-Change Electric Start)	17
Cordless Cylinder Lawn Mower	17
Cordless Multipurpose Spreader	18
Cordless Universal Spreader	18
Cordless Scarifiers/Aerators	18
Cordless Tillers	21
Cordless Snow Thrower	21
Cordless Scythes	22
Cordless Lawn Trimmers	23
Cordless Lawn Edge Trimmer	26
Cordless Grout Cleaners	27
Cordless Surface Brushes	27
Cordless Hedge Trimmers	29
Cordless Olive and Fruit Harvester	31
Cordless Multifunctional Tools	32
Cordless Pole-Mounted Pruners	33
Cordless Telescopic Hedge Trimmers	34
Cordless Telescopic Hedge Trimmers	34

Cordless Chainsaws	35
Cordless Pruning Chainsaw	36
Cordless Chain Sharpener	36
Cordless Pruning Saw	37
Cordless Pruning Shears	37
Cordless Universal Blower	38
Cordless Leaf Blowers	38
Cordless Leaf Vacuums	38
Cordless Knife Shredder	39
Cordless Grass and Shrub Shears	40
Cordless Pressure Sprayers	41
Cordless Air Pump	42
Cordless Outdoor Light	42
Cordless Fans	43
Battery Belt	44
Gas Hot Air Generator with Rechargeable Battery	44
Cordless Hose Reels (Water)	45
Cordless Automatic Garden Pumps	46
Cordless Garden Pumps	47
Cordless Submersible Pressure/Rainwater Barrel Pump	50
Cordless Clear Water Pumps	50
Cordless Dirty Water Pumps	51



## **POWER X-CHANGE ACCESSORIES**

System Cases E-Case	52
Accessories – Cases // Bags	55

Power X-Change Accessories – Batteries // Starter Kits // Chargers	56
Battery Charging Time Table	60



## GARDEN CARE

Hand Lawn Mowers	62
Electric Lawn Mowers	64
Petrol Lawn Mowers	65
Electric Scarifiers/Aerators	67
Electric Scarifier	68
Petrol Scarifier	68
Garden Roller	68
Multi-Purpose Spreader	69
Electric Lawn Trimmers	69
Petrol Lawn Trimmer	70
Petrol Multifunctional Tool	70
Petrol Scythes	71
Petrol Tillers	73

Electric Tillers	73
Electric Hedge Trimmers	74
Petrol Hedge Trimmer	76
Cordless Grass and Shrub Shears	76
Electric Pole-Mounted Pruner	77
Electric Telescopic Hedge Trimmers	77
Electric Multifunctional Tool	78
Electric Chainsaws	78
Petrol Chainsaws	80
Electric Chain Sharpeners	81
Electric Leaf Vacuums	82
Garden Shredders	82
Electric Roller Shredders	83

## 

## WATER TECHNOLOGY

AQUA SENSOR Clear Water Pump	84
AQUA SENSOR Dirty Water Pumps	84
Multi-Purpose Pumps	85
Submersible Pump Dirty/Clear Water ECO	86
Dirty Water Pumps	86
Clear Water Pumps	89
Rain Barrel Pump	90
Submersible Pressure Pumps	90
Deep Well Pumps	91

Garden Pumps PLUS	92
Garden Pumps	94
Peripheral Pump	95
Automatic Home and Garden Pumps PLUS	95
Automatic Home and Garden Pump SMART	96
Automatic Home and Garden Pump	96
Water Works PLUS	97
Water Works	98
Petrol Water Pumps	99



## PROFESSIONAL

PROFESSIONAL Cordless Robot Lawn Mower	102
PROFESSIONAL Cordless Lawn Mowers	104
PROFESSIONAL Cordless Tiller	111
PROFESSIONAL Cordless Snow Thrower	112
PROFESSIONAL Cordless Earth Auger	113
PROFESSIONAL Cordless Scythes	114
PROFESSIONAL Cordless Lawn Trimmer	116
PROFESSIONAL Cordless Hedge Trimmers	117
PROFESSIONAL Cordless Multifunctional Tool	119

Power X-Change Accessories – Batteries // Starter Kits // Chargers	132
Battery Charging Time Table	136

PROFESSIONAL Cordless Pole-Mounted Pruner	120
PROFESSIONAL Cordless Telescopic Hedge Trimmer	121
PROFESSIONAL Cordless Chainsaws	122
PROFESSIONAL Top-handeled Cordless Chainsaw	124
PROFESSIONAL Cordless Pruning Chainsaw	125
PROFESSIONAL Cordless Leaf Blowers	126
PROFESSIONAL Cordless Leaf Vacuum	129
PROFESSIONAL Cordless Pruning Shears	130

Einhell-Service
Eschenstr. 6
0440E Landau /lear

94405 Landau/ Germany

Telefon	+ 49 (0) 9951 959 2000
Fax	+ 49 (0) 9951 959 1700
Web	www.einhell-service.de
Email	Service-DE@einhell.co

Einhell Germany AG Wiesenweg 22 94405 Landau / Isar – Germany info@einhell.de – www.einhell.de

## THIS IS HOW:

Find out more at einhell.de, register in your customer account and apply for the warranty. Further information is available at www.einhell.de/en/services/ warranties/

## THE EINHELL GUARANTEE PROMISE.

We develop our products so that you can make everything possible. Our priority here is functionality, safety and quality. That is our promise and this is backed up by our guarantees too.



#### **30 DAY MONEY BACK GUARANTEE**

For 100% satisfaction with your Power X-Change device. This guarantee is only valid for purchases in stationary shops! Online purchases are excluded.



**3-YEAR EINHELL PRODUCT WARRANTY** Warranty extension for your Power X-Change device to 3 years.



**POWER X-CHANGE BATTERY WARRANTY** Warranty extension for Power X-Change batteries to 3 years.



**EINHELL BRUSHLESS WARRANTY** Warranty extension for all PurePOWER Brushless products to 10 years.\*

\* This warranty covers only defects in the engine that are due to a material or manufacturing defect









#### CORDLESS FREEDOM. FOR DIY ENTHUSIASTS AND HOBBY GARDENERS.

#### At last - no more too short or severed cables.

When you have no longer to worry about extension cables that are too short or sufficient sockets. When the device comes to the project instead of the other way round. When you simply insert the battery and are ready to go, whether it is a lawn mower, garden pump, rotary hammer or wet and dry vacuum cleaner. Than that is the feeling of cordless freedom.

#### **1 BATTERY FITS ALL TOOLS.** THE BATTERY SYSTEM FOR THE WORKSHOP, GARDEN AND YOUR ENTIRE HOME.

#### Just as versatile as you: Battery power for every situation.

With more than 300 battery operated DIY and garden tools, our battery platform Power X-Change is already the broadest for the ambitious DIYer and amateur gardener. And it's not stopping there! By the year 2027 the battery platform will feature more than 450 tools. What's so special about it is that all products from the Power X-Change platform can be operated with just one battery type (18 V).

#### **POWERFUL MACHINES.** LONG-LASTING BATTERIES.

#### Battery power for all your projects.

Less power? No way! Our cordless machines offer up to 2700 W of battery power and 8 Ah of capacity, making them easily a match for corded machines! Whether you just want to hang a shelf or drill through a solid concrete wall, with Power X-Change you are equipped to meet any challenge with power and endurance.

#### LATEST TECHNOLOGY. PROVEN QUALITY

#### For the highest level of safety and performance.

Power X-Change batteries are the core component of our platform. That's why we use only the best components such as high-performance new-generation cells and our intelligent processor-controlled battery electronics. This makes our PXC battery one of the safest in the industry and ensures efficiency, reliability and durability.

#### **EINHELL PROFESSIONAL.** MORE POWER FOR PROS.

#### True Pros always give MORE.

Because every step demands perfection. Where precision is a must. And every second counts. Professionals also expect more from their tools. Now Einhell gives them more: More performance. More endurance. More warranty. More lifetime. More functionality.







#### ACTIVE BATTERY MANAGEMENT SYSTEM. INTELLIGENT ELECTRONIC CONTROL SYSTEM.

The computer-assisted Active Battery Management System permanently monitors and controls all the safety-related processes of the electrical components and associated hardware. This results in a whole range of advantages:

- MAXIMISED RUNNING TIMES
- OPTIMISED TOOL POWER
- LONGER BATTERY SERVICE LIFE
- INCREASED SAFET





#### **TWIN-PACK TECHNOLOGY.** 18 V + 18 V = 36 V.

If extra power is required for more power hungry tools, two 18 V battery packs can be s imply combined in a single 36 V tool using Einhell's twin pack technology. Doubling the voltage (V) automatically doubles the power (W) as well. Double twin pack technology also lets you work longer without the hassle of having to recharge. In this case four batteries are used. When the power of the first two batteries finally runs out, the system automatically switches over to the two additional batteries.





### SEALED TECHNOLOGY. THE NEXT GENERATION OF BATTERY TECHNOLOGY.

Waterproof and completely dust resistant? Yes, it is possible! Our Power X-Change batteries with SEALED technology are waterproof and dustproof according to protection class IP57. Whether it's water, or dust from wood or metal – the SEALED battery with the blue ring can withstand anything you throw at it and won't suffer damage even after 30 minutes in 1 m of water. Once it is dry, it can be used again as normal in all Einhell Power X-Change cordless tools.

With the SEALED batteries, Einhell is developing the next generation of rechargeable battery technology and once again demonstrating its concentrated expertise.





#### **CORDLESS ROBOT LAWN MOWER WITHOUT PERIMETER WIRE -DETECTS OBSTACLES AND BOUNDARIES**



PHYSICAL BOUNDARIES e.g. walls, hedges, trees

**VISUAL BOUNDARIES** e.g. bark mulch, tar, stones



>> PXC system battery

- >> Mowing without perimeter wire
- >> Integrated camera and ultrasonic sensors
- Magnetic band for virtual borders (5 m, included in delivery)
   Programmable operating times



- PXC system batteryMowing without perimeter wire
- >> Integrated camera and ultrasonic sensors
- >> App (WiFi)
- >>> LCD display
- >> Over-the-Air Update
- >> Magnetic band for virtual borders (5 m, included in delivery)

## **POWER X-CHANGE ROBOT LAWN MOWER** WITHOUT PERIMETER WIRE

## **FREELEXO CAM 500**

PXC battery voltage	18 V		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	500 m <sup>2</sup>		
Cutting width	18 cm		
Cutting height adjustment	infinitely / 20 - 60 mm / central		
Suitable for slopes up to	25 %		
Supplied with accessories	Magnetic band (5 m), 2 connection clamps, 3 spare blades		
Incl. 1 battery (18 V 3.0 Ah Li-ion)	Article number 3413991	4 006825 663525	

- >> Mowing program for border areas
- **»** Eco mode
- >> Impact, lift and tilt sensors
- >>> Brushless motor
- >> Supplied with charging unit (12 m guide cable included)

### **POWER X-CHANGE ROBOT LAWN MOWER** WITHOUT PERIMETER WIRE

#### **FREELEXO CAM PLUS 600**

PXC battery voltage	18 V		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	600 m <sup>2</sup>		
Cutting width	18 cm		
Cutting height adjustment	infinitely / 20 - 60 mm / central		
Suitable for slopes up to	25 %		
Supplied with accessories	Magnetic band (5 m), 2 connection clamps, 3 spare blades		
Incl. 1 battery (18 V 4.0 Ah Li-ion)	Article number 3413975	4 006825 678413	

Programmable operating time for each specific day
 Mowing program for border areas

- >>> Eco mode
- >>> Impact, lift and tilt sensors
- >>> Brushless motor
- >> Supplied with charging unit (12 m guide cable included)

## Finhell

#### **CHECKLIST: IS MY GARDEN SUITABLE?**



colour





Irregularities in colour (e.g. leaves, scorched areas)

\* The lawn area needs to be checked for suitable lawn boundaries

#### MADE POSSIBLE BY A VIRTUAL FENCE – THANKS TO MAGNETIC TAPE ACCESSORY


edges

Lay the supplied magnetic tape in the garden and it will act like a virtual fence. The magnet sensors installed in the FREELEXO CAM detect the magnetic tape and turn away at its limits. In this way you can create off-limit areas at short notice.


No clearly recognisable lawn



#### A TEMPORARY **OFF-LIMITS AREA** When you want to hold a garden party and need to keep the robot lawn mower at a distance for the duration of the celebrations.



#### NEWLY PLANTED TREE A tree has been newly planted in the lawn area and is still sensitive. To protect it from collisions with the robot lawn mower you can use the virtual fence.



#### **FLOWER MEADOW IN** THE GARTEN

Simple design, uniform shape

Many separate areas, bottle-

necks and recesses

A flower meadow in the garden is just beginning to grow and is attracting the first insects. Now is the wrong time for the robot lawn mower to pass through.

## LAWN EDGES MADE BETTER

Lawn edges that are poorly defined or hard to recognise by the robot lawn mower can be upgraded by the magnetic tape for optimum demarcation of the mowing area in the garden.

#### **Robot Lawn Mowers without Perimeter Wire - Accessories**

	Туре	Article number	EAN	Items supplied	Suitable for
T	Robot Lawn Mower Garage	3414024	4 006825 654417	1 pc (folding, l x b x h: 77.0 x 59.0 x 39.5 cm)	all Einhell robot lawn mowers (außer FREELEXO 500 - 3413935)
	Spare Blades	3414020	4 006825 648775	12 pcs	all Einhell robot lawn mowers
	Cleaning Set	3414025	4 006825 657951	Gloves, cleaning brushes, abrasive pads, microfibre cloth, spatula, screwdriver	all Einhell robot lawn mowers
0	Magnetic Band Set 20 m	3414028	4 006825 670929	Magnetic tape (length: 20 m), 20 fastening hooks	FREELEXO CAM

#### **NEW**



- PXC system battery
   App (Bluetooth + WiFi)
   Over-the-Air Update
- > LED display
- Programmable operating time for each specific day
- >> Multi area mowing

## **POWER X-CHANGE ROBOT LAWN MOWERS**

## **FREELEXO 500**

PXC battery voltage	18 V			
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	500 m²			
Cutting width	18 cm			
Cutting height adjustment	infinitely / 30 - 60 mm / central			
Suitable for slopes up to	35 %			
Supplied with perimeter wire	130 m			
Supplied with fastening hooks	190 pcs			
Supplied with accessories	3 connecting clamps, 3 blades			
Incl. 1 battery (18 V 2.5 Ah Li-ion)	Article number 3413935 4 006825 682359			

- Spot Mowing
   Mowing program for border areas
   Eco mode
- - Impact, lift and tilt sensors
     Brushless motor
  - >> Supplied with charging unit



PXC battery voltage	18 V		
For lawn areas of up to approx. (The			
stated area coverage is based on	1200 m <sup>2</sup>		
the assumption of ideal conditions)			
Cutting width	18 cm		
Cutting height adjustment	infinitely / 20 - 60 mm / central		
Suitable for slopes up to	35 %		
Supplied with perimeter wire	210 m		
Supplied with fastening hooks	300 pcs		
Supplied with accessories	3 connecting clamps, 3 blades		
Incl. 1 battery (18 V 5.2 Ah Li-ion)	Article number 4326368 4 006825 653441		

>> Multi area mowing

- >> Impact, lift and tilt sensors
- >>> Brushless motor
- >> Supplied with charging unit

100 m		
		Ø

PXC system batteryApp (Bluetooth)

- >> LCD display

>> Programmable operating time for each specific day

#### **Robot Lawn Mowers without Perimeter Wire - Accessories**

	Туре	Article number	EAN	Items supplied	Suitable for
	Robot Lawn Mower Garage	3414024	4 006825 654417	1 pc (folding, l x b x h: 77.0 x 59.0 x 39.5 cm)	all Einhell robot lawn mowers
7	Robot Lawn Mower Garage	3414050	4 006825 685138	1 pc (l x w x h: 59.4 x 50.8 x 37.3 cm)	FREELEXO 500
0	Perimeter Wire	3414021	4 006825 648782	1 pc (50 m)	all Einhell robot lawn mowers
-	Spare Blades	3414020	4 006825 648775	12 pcs	all Einhell robot lawn mowers
	Fastening Hooks	3414023	4 006825 648805	100 pcs	all Einhell robot lawn mowers
	Connection Clamps	3414022	4 006825 648799	4 pcs	all Einhell robot lawn mowers
0	Repair Kit	3414026	4 006825 657968	5 m perimeter wire, 15 fasten- ing hooks, 8 connecting clamps	all Einhell robot lawn mowers
	Cleaning Set	3414025	4 006825 657951	Gloves, cleaning brushes, abrasive pads, microfibre cloth, spatula, screwdriver	all Einhell robot lawn mowers





## **ROBOT LAWN MOWERS - COMPARISON OF FEATURES**



















## PROFESSIONAL CORDLESS LAWN MOWER

#### **RASARRO 36/42**

	entral	
	entral	
	entral	
105 75 1	entral	
6 levels / 25 - 75 mm / central		
50 I		
150 mm / 220 mm		
Plastic		
17.2 kg		
	06825 669138	
	umber 4	

	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>xxx</b> <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	350 m <sup>2</sup>	450 m <sup>2</sup>	550 m <sup>2</sup>	725 m <sup>2</sup>	875 m <sup>2</sup>	1100 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

<sup>10</sup> Battery capacity (2x batteries required)
 <sup>2</sup> Max, lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	
-------------	--

3405454

# >>> Brushless motor >> Integrated carry handle >> Height-adjustable handlebar Folding handlebar Grass box with level indicator Wide wheels exert less stress on the lawn Einheli

## **PROFESSIONAL CORDLESS LAWN MOWER**

#### **RASARRO 36/40**

PXC battery voltage	2x 18 V		
Battery charging time 18 V / 4.0 Ah	75 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	500 m <sup>2</sup>		
Cutting width	40 cm		
Cutting height adjustment	6 levels / 25 - 75 mm / central		
Grass box capacity	50		
Wheel diameter front / rear	150 mm / 220 mm		
Housing material	Plastic		
Product weight	17.4 kg		
Incl. 2 batteries (18 V 4.0 Ah Li-lon) and 1 Twincharger	Article number 3413278	4 006825 669121	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	220 m <sup>2</sup>	280 m <sup>2</sup>	330 m <sup>2</sup>	425 m <sup>2</sup>	500 m <sup>2</sup>	700 m <sup>2</sup>	850 m <sup>2</sup>	1000 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

 Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade

3405454



>>> Brushless motor >> Folding handlebar >>> Grass box with level indicator >> Wide wheels exert less stress on the lawn

## **PROFESSIONAL CORDLESS LAWN MOWER**

#### **RASARRO 36/38**

PXC battery voltage	2x 18 V				
Battery charging time 18 V / 4.0 Ah	75 min				
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	450 m <sup>2</sup>				
Cutting width	38 cm				
Cutting height adjustment	6 levels / 25 - 75 mm / central				
Grass box capacity	45				
Wheel diameter front / rear	150 mm / 220 mm				
Housing material	Plastic				
Product weight	15.5 kg				
Incl. 2 batteries (18 V 4.0 Ah Li-lon) and 1 Twincharger	Article number 3413180 4 006825 635867				

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>xxx</b> <sup>2)</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	330 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	700 m <sup>2</sup>	800 m <sup>2</sup>	900 m <sup>2</sup>

<sup>1</sup> Battery capacity (2x batteries with at least 2.5 Ah
 <sup>2</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

3405486



### **CORDLESS LAWN MOWER**

#### **RASARRO 36/36**

PXC battery voltage	2x 18 V				
Battery charging time 18 V / 3.0 Ah	60 min				
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	400 m <sup>2</sup>				
Cutting width	36 cm				
Cutting height adjustment	6 levels / 25 - 75 mm / central				
Grass box capacity	45				
Wheel diameter front / rear	150 mm / 220 mm				
Housing material	Plastic				
Product weight	13.0 kg				
Incl. 2 batteries (18 V 3.0 Ah Li-lon) and 2 chargers	Article number 3413282	4 006825 669114			

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> <sup>2)</sup>	200 m <sup>2</sup>	250 m <sup>2</sup>	290 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	650 m <sup>2</sup>	800 m <sup>2</sup>	900 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

 Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade

3405486







#### **RASARRO 36/34**

PXC battery voltage	2x 18 V				
Battery charging time 18 V / 3.0 Ah	60 min				
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	300 m²				
Cutting width	34 cm				
Cutting height adjustment	5 levels / 25 - 65 mm / central				
Grass box capacity	30				
Wheel diameter front / rear	150 mm / 180 mm				
Housing material	Plastic				
Product weight	13.9 kg				
Incl. 2 batteries (18 V 3.0 Ah Li-lon) and 2 chargers	Article number 3413222 4 006825 668605				

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	150 m <sup>2</sup>	200 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	400 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	800 m <sup>2</sup>

<sup>1</sup> Battery capacity (2x batteries with at least 2.5 Ah
 <sup>2</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	
-------------	--

3405452

# >> Mulching function >> Integrated carry handle >>> Brushless motor Brushless motor Height-adjustable handlebar Folding handlebar Grass box with level indicator Wide wheels exert less stress on the lawn

#### **CORDLESS LAWN MOWER**

#### **GE-CM 36/43 Li M Brushless**

PXC battery voltage	2x 18 V			
Battery charging time 18 V / 4.0 Ah	75 min			
For lawn areas of up to approx. (The				
stated area coverage is based on	600 m <sup>2</sup>			
the assumption of ideal conditions)				
Cutting width	43 cm			
Cutting height adjustment	6 levels / 25 - 75 mm / central			
Grass box capacity	63 I			
Wheel diameter front / rear	160 mm / 250 mr	) mm		
Housing material	Plastic			
Product weight	13.2 kg (excl. battery)			
Incl. 2 batteries (18 V 4.0 Ah Li-Ion)	Article number	4 006825 645866		
and 2 chargers	3413240	4 <sup>  </sup> 006825 <sup>  </sup> 645866 <sup>  </sup>		
Without batteries / chargers	Article number 3413246	4 006825 648720		

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	225 m <sup>2</sup>	300 m <sup>2</sup>	350 m <sup>2</sup>	450 m <sup>2</sup>	600 m <sup>2</sup>	750 m <sup>2</sup>	900 m <sup>2</sup>	1200 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

<sup>1)</sup> Battery capacity (2x batteries required)
 <sup>2)</sup> Max, lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

006825 (100 Spare blade 3405451





#### GE-CM 36/37 Li

PXC battery voltage	2x 18 V			
Cutting width	37 cm			
Cutting height adjustment	6 levels / 25 - 75 mm / central			
Grass box capacity	45			
Wheel diameter front / rear	150 mm / 220 mm			
Housing material	Plastic			
Product weight	13.5 kg			
Article only available without batter- ies / chargers	Article number 3413172	4 006825 635898		

<b>xxx</b> <sup>2</sup> 200 m <sup>2</sup> 250 m <sup>2</sup> 290 m <sup>2</sup> 400 m <sup>2</sup> 450 m <sup>2</sup> 650 m <sup>2</sup> 800 m <sup>2</sup> 900 m <sup>2</sup>	<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	<b>2</b> )	200 m <sup>2</sup>	250 m <sup>2</sup>	290 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	650 m <sup>2</sup>	800 m <sup>2</sup>	900 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

<sup>1)</sup> Battery capacity (2x batteries required)

<sup>2)</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405486	4 006825 635843
-------------	---------	-----------------



## **CORDLESS LAWN MOWER**

#### **GE-CM 36/36 Li Brushless**

PXC battery voltage	2x 18 V	
Battery charging time 18 V / 4.0 Ah	75 min	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	400 m <sup>2</sup>	
Cutting width	36 cm	
Cutting height adjustment	6 levels / 25 - 75 mm / ce	entral
Grass box capacity	40	
Wheel diameter front / rear	145 mm / 220 mm	
Housing material	Plastic	
Product weight	13.4 kg	
Incl. 2 batteries (18 V 4.0 Ah Li-lon) and 2 chargers	Article number 3413230 4 00	06825 645835

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> <sup>2)</sup>	175 m <sup>2</sup>	250 m <sup>2</sup>	270 m <sup>2</sup>	350 m <sup>2</sup>	400 m <sup>2</sup>	600 m <sup>2</sup>	700 m <sup>2</sup>	960 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

 Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

3405485



#### GE-CM 36/34-1 Li

PXC battery voltage	2x 18 V
Cutting width	33.5 cm
Cutting height adjustment	5 levels / 25 - 65 mm / central
Grass box capacity	30
Wheel diameter front / rear	150 mm / 180 mm
Housing material	Plastic
Product weight	11.9 kg
Article only available without batter- ies / chargers	Article number 3413226 4 006825 645026

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	150 m <sup>2</sup>	200 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	400 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	800 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

<sup>1)</sup> Battery capacity (2x batteries required)

<sup>2)</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405452	4 006825 610611
-------------	---------	-----------------



## **CORDLESS LAWN MOWER**

#### GE-CM 36/33 Li

PXC battery voltage	2x 18 V
Battery charging time 18 V / 4.0 Ah	50 min
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	250 m²
Cutting width	33 cm
Cutting height adjustment	5 levels / 25 - 65 mm / central
Grass box capacity	30
Wheel diameter front / rear	150 mm / 180 mm
Housing material	Plastic
Product weight	11.6 kg
Incl. 2 batteries (18 V 2.5 Ah Li-Ion) and 2 chargers	Article number 3413210 4 006825 645002

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	150 m <sup>2</sup>	200 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	400 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	800 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

 Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade 3405452





#### **GE-CM 18/33 Li Brushless**

PXC battery voltage	18 V				
Battery charging time 18 V / 4.0 Ah	75 min				
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	200 m <sup>2</sup>				
Cutting width	33 cm				
Cutting height adjustment	5 levels / 25 - 65 i	mm / central			
Grass box capacity	30				
Wheel diameter front / rear	150 mm / 180 mi	m			
Housing material	Plastic				
Product weight	10.1 kg (excl. bat	tery)			
Incl. 1 battery (18 V 4.0 Ah Li-Ion) and 1 charger	Article number 3413260	4 006825 646856			
Without battery / charger	Article number 3413266	4 006825 647686			

**1)** 1.5 Ah 2.0 Ah 2.5 Ah 3.0 Ah 4.0 Ah 5.2 Ah 6.0 Ah 8.0 Ah >>> <sup>2)</sup> 50 m<sup>2</sup> 100 m<sup>2</sup> 140 m<sup>2</sup> 180 m<sup>2</sup> 250 m<sup>2</sup> 300 m<sup>2</sup> 350 m<sup>2</sup> 500 m<sup>2</sup>

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade

3405452



## **CORDLESS LAWN MOWER**

#### **GE-CM 18/32 Li Brushless**

PXC battery voltage	18 V	
Cutting width	32 cm	
Cutting height adjustment	3 levels / 30 - 70	mm / axial
Grass box capacity	25 l	
Wheel diameter front / rear	140 mm / 140 mi	m
Housing material	Plastic	
Product weight	8.5 kg	
Article only available without battery / charger	Article number 3413256	4 006825 645712

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	50 m <sup>2</sup>	100 m <sup>2</sup>	140 m <sup>2</sup>	180 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	350 m <sup>2</sup>	500 m <sup>2</sup>

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

3405453







#### **GE-CM 18/30 Li Brushless**

PXC battery voltage	18 V		
Battery charging time 18 V / 3.0 Ah	60 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	150 m²		
Cutting width	30 cm		
Cutting height adjustment	3 levels / 30 - 70 mm / axial		
Grass box capacity	25		
Wheel diameter front / rear	140 mm / 140 mm		
Housing material	Plastic		
Product weight	8.9 kg (excl. batte	ery)	
Incl. 1 battery (18 V 3.0 Ah Li-Ion) and 1 charger	Article number 3413155	4 006825 629163	
Without battery / charger	Article number 3413157	4 006825 631869	

>>> <sup>2)</sup> 30 m² 70 m<sup>2</sup> 100 m<sup>2</sup> 150 m<sup>2</sup> 210 m<sup>2</sup> For best performance select a battery with at least 2.5 Ah

2.5 Ah

2.0 Ah

<sup>1)</sup> Battery capacity

1.5 Ah

<sup>2)</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

3.0 Ah

4.0 Ah

Spare blade

**1**)

3404553

5.2 Ah

270 m<sup>2</sup>

6.0 Ah

300 m<sup>2</sup>

8.0 Ah

420 m<sup>2</sup>



## **CORDLESS LAWN MOWER**

#### **GE-CM 36/48 Li M Brushless**

PXC battery voltage	2x 18 V		
Cutting width	48 cm		
Cutting height adjustment	6 levels / 30 - 75 mm / axial		
Wheel diameter front / rear	180 mm / 180 mm		
Housing material	Steel		
Product weight	16.9 kg		
Article only available without batter- ies / chargers	Article number 3413054	4 006825 660654	

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	150 min	250 m <sup>2</sup>	260 m <sup>2</sup>	300 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	700 m <sup>2</sup>	1000 m <sup>2</sup>
3)	300 m <sup>2</sup>	500 m <sup>2</sup>	520 m <sup>2</sup>	600 m <sup>2</sup>	1000 m <sup>2</sup>	1200 m <sup>2</sup>	1400 m <sup>2</sup>	2000 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge with 2 batteries

<sup>3)</sup> Max. lawn area that can be mown per battery charge with 4 batteries (The stated area coverage is based on the assumption of ideal conditions)

Spare blade 3405456







- Highwheels
   Self-propelling
   Electric start function with PXC battery (18 V)
   Mulching function
   Height-adjustable long handle with soft grip
   Grass box with level indicator

## PETROL LAWN MOWER (POWER X-CHANGE ELECTRIC START)

#### GC-PM 51/3 S HW-E Li

Engine / displacement	4-stroke engine / 170 cm <sup>3</sup>
Power / working speed	2.7 kW / 2900 min <sup>-1</sup>
PXC battery voltage	1x 18 V / 2.0 Ah
Battery charging time 18 V / 2.0 Ah	2.5 h
Cutting width	51 cm
Cutting height adjustment	6 levels / 30 - 80 mm / central
Grass box capacity	701
Wheel diameter front / rear	204 mm / 280 mm
Housing material	Powder-coated sheet steel
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1800 m <sup>2</sup>
Product weight	29.6 kg
Incl. 1 battery (18 V 2.0 Ah Li-Ion) and 1 charger	Article number 3404870 4 006825 655285

	I.S AII	Z.U ATI	Z.S AIT	3.0 AH	4.0 AT	D.Z AII	0.0 ATT	8.0 AH
2)	130 starts	174 starts	218 starts	261 starts	347 starts	452 starts	522 starts	695 starts

<sup>1)</sup> Battery capacity

<sup>2)</sup> Number of starts per battery charge - the possible number of starts depends on various influences, e.g. temperature of the engine, ambient temperature, etc.

Spare blade	3405660	4 006825 605273
Combination blade	3405650	4 006825 605266



## **CORDLESS CYLINDER LAWN MOWER**

#### GE-HM 18/38 Li

PXC battery voltage	18 V
Cutting width	38 cm
Cutting height adjustment	4 levels / 14 - 38 mm
Grass box capacity	45 I
Number of mowing blades	5
Mowing spindle diameter	125 mm
Product weight	10.5 kg
Article only available without battery / charger	Article number 3414200 4 006825 641639
	· · · · · · · · · · · · · · · · · · ·

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	100 m <sup>2</sup>	150 m <sup>2</sup>	190 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	600 m <sup>2</sup>

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)



- >>> Electronic speed control (6-stage)
- >>> Flow rate adjustment (6-stage)
- >> Individually adjustable spread width
- Soft grip
   Suitable for gritting material





- >>> Electronic speed control (6-stage)
- >>> Flow rate adjustment (8-stage) >> Individually adjustable spread width

- Soft grip
   Suitable for gritting material

## CORDLESS MULTIPURPOSE SPREADER

#### GE-SR 18/22 Li

PXC battery voltage	18 V
Capacity	22
Spread width	max. 6 m
Suitable for	Fertiliser, lawn seeds, salt
Product weight	6.2 kg
Article only available without battery	Article number 3415430 4 006825 673142
/ charger	3415430 4 <sup>006825</sup> 673142

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> <sup>2)</sup>	3 h	4 h	5 h	7 h	8 h	10 h	11 h	15 h

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge

## CORDLESS UNIVERSAL SPREADER

#### GE-US 18 Li

PXC battery voltage				18 V					
Capacit	ty								
Spread	width		max. 5 m						
Suitabl	e for				Fertiliser, lawn seeds, salt				
Produc	t weight				1.2 kg				
Article / charg	,	lable with	nout batt	ery		icle numb 5410			
<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah		4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	2 h	3 h	4 h	6	h	7 h	9 h	10 h	14 h

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge



## **CORDLESS SCARIFIER/AERATOR**

#### GE-SA 36/35 Li Brushless

PXC battery voltage			2x 18 V					
For lawn areas of up t stated area coverage the assumption of ide	is based on		550 m <sup>2</sup>					
Working width			35	cm				
Working depth adjust	ment		3 levels (central) + transport posit				osition	
Number of blades			16 pcs					
Wheel diameter front	/ rear		160 mm / 160 mm					
Housing material			Easy maintenance plastic housi			sing		
Product weight			11.3 kg					
Number of aerator cla	WS		24	ocs				
Article only available v ies / chargers	vithout bat	ter-	- Article number 4 006825 662			662375		
1.5 Ah 2.0 A	n 2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah

150 m<sup>2</sup> 190 m<sup>2</sup> 225 m<sup>2</sup> 300 m<sup>2</sup> 400 m<sup>2</sup> 450 m<sup>2</sup> 550 m<sup>2</sup> 100 m<sup>2</sup> <sup>1)</sup> Battery capacity (2x batteries required)

2)

<sup>2)</sup> Max. lawn area that can be scarified per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Catch bag	3405960	4 006825 667523
Aerator Roller	3405961	4 006825 667516
Scarifier Roller	3405962	4 006825 667509







#### **CORDLESS SCARIFIER/AERATOR**

#### GE-SC 36/35 Li Brushless

PXC battery vol	tage			2x 18 V					
For lawn areas stated area cov	eraġe is b	based on		550 m²					
the assumption	of ideal	conditior	าร)	0.5					
Working width				35	cm				
Working depth	adjustme	ent		3 levels (central) + transport positi			osition		
Number of blac	mber of blades			16 pcs					
Wheel diamete	r front / r	ear		160 mm / 160 mm					
Housing mater	al			Easy maintenance plastic housing			sing		
Product weight				9.9 kg					
Article only ava ies / chargers	ilable witl	hout bat	ter-		cle numb 0680	ber	4 006825 661439		
1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah		4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah
2) 100 m <sup>2</sup>	150 m <sup>2</sup>	190 m <sup>2</sup>	225	5 m²	300 m <sup>2</sup>	400	m²	450 m <sup>2</sup>	550 m <sup>2</sup>

<sup>1)</sup> Battery capacity (2x batteries required)

<sup>2)</sup> Max. lawn area that can be scarified per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Catch bag	3405960	4 006825 667523
Aerator Roller	3405961	4 006825 667516
Scarifier Roller	3405962	4 006825 667509

- >> Wide wheels exert less stress on the lawn
- >> Height-adjustable handlebar
- >> Folding handlebar
- >> Scarifier roller / aerator roller



## **CORDLESS SCARIFIER/AERATOR**

#### GC-SC 36/31 Li

00 00 00/01 El								
PXC battery voltage			2x ′	18 V				
For lawn areas of up to a stated area coverage is the assumption of ideal	based on		500	1 m²				
Working width			31 (	cm				
Working depth adjustme	ent		3 le	vels (cen	tral) ·	+ pa	irking po	sition
Number of blades			8 d	ouble-kni	ives			
Wheel diameter front / I	rear		180	mm / 10	)0 mr	n		
Housing material			Plas	stic				
Product weight			8.0	kg				
Article only available wit ies / chargers	hout batt	ter-	- Article number 3420660 4 006825 6369				636956	
1 15 Ah 20 Ah	25 Ah	30	۱Ah	104h	52	Δh	6 O Ah	8 O Ah

4.0 Ah 6.0 Ah 1.5 Ah 2.0 Ah | 2.5 AN | 3.0 Ah 5.2 Ah 8.0 Ah 2) 80 m<sup>2</sup> 200 m<sup>2</sup> 350 m<sup>2</sup> 100 m<sup>2</sup> 130 m<sup>2</sup> 250 m<sup>2</sup> 300 m<sup>2</sup> 500 m<sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)

<sup>2)</sup> Max. lawn area that can be scarified per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Catch bag	3405577	4 006825 629699
Aerator Roller	3405572	4 006825 629675
Scarifier Roller	3405582	4 006825 629682





- >> Wide wheels exert less stress on the lawn >>> Brushless motor
- >> Height-adjustable handlebar
- ➤ Folding handlebar
- Scarifier roller / aerator roller
- (optionally expandable)



## **CORDLESS SCARIFIER/AERATOR**

#### GC-SC 18/28 Li Brushless

PXC battery voltage	18 V	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	350 m²	
Working width	28 cm	
Working depth adjustment	3 levels (central)	+ parking position
Number of blades	12 pcs	
Wheel diameter front / rear	150 mm / 100 mi	m
Housing material	Plastic	
Product weight	6.6 kg	
Article only available without battery / charger	Article number 3420604	4 006825 655223

<b>20</b> 60 m <sup>2</sup> 80 m <sup>2</sup> 100 m <sup>2</sup> 120 m <sup>2</sup> 160 m <sup>2</sup> 210 m <sup>2</sup> 240 m <sup>2</sup> 350 m <sup>2</sup>	<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	2)	60 m <sup>2</sup>	80 m <sup>2</sup>	100 m <sup>2</sup>	120 m <sup>2</sup>	160 m <sup>2</sup>	210 m <sup>2</sup>	240 m <sup>2</sup>	350 m <sup>2</sup>

For best performance select a battery with at least 2.5 Ah

 Battery capacity
 Max. lawn area that can be scarified per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Catch bag	3405940	4 006825 658798
Aerator Roller	3405941	4 006825 658804
Scarifier Roller	3405942	4 006825 658811

## **CORDLESS SCARIFIER/AERATOR**

#### GC-SC 18/28 DS Li Brushless

18 V (+ 18 V)	
700 m²	
28 cm	
3 levels (central)	+ parking position
12 pcs	-
150 mm / 100 mr	n
Plastic	
6.7 kg	-
Article number 3420625	4 006825 682496
	28 cm 3 levels (central) 12 pcs 150 mm / 100 mr Plastic 6.7 kg Article number

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2)</b>	120 m <sup>2</sup>	160 m <sup>2</sup>	200 m <sup>2</sup>	240 m <sup>2</sup>	320 m <sup>2</sup>	420 m <sup>2</sup>	480 m <sup>2</sup>	700 m <sup>2</sup>

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. lawn area that can be scarified per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Catch bag	3405940	4 006825 658798
Aerator Roller	3405941	4 006825 658804
Scarifier Roller	3405942	4 006825 658811







- >>> Brake shoe
- >>> Two-hand safety switch
- ➤ Soft grip



- >> Plug-in long handle (split shaft)
- >> Electronic speed control
- Integrated carry handle
   Two-hand safety switch
- ➤ Soft grip

- Brushless motor
   Snow ejection direction adjustable
- >>> Electronic speed control
- >>> Battery cover
- >> Additional handle
- >> Integrated carry handle
- ➤ Soft grip
- Self-standing
   Two-hand safety switch

## **CORDLESS TILLER**

#### GE-CR 30 Li

PXC battery voltage	2x 18 V	
Working width	30 cm	
Working depth	200 mm	
Number of blades	4 pcs	
Cultivator blade diameter	200 mm	
Housing material	Plastic	
Product weight	11.0 kg	
Article only available without batter- ies / chargers	Article number 3431200	4 006825 615203

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	15 min	20 min	21 min	25 min	35 min	50 min	60 min	70 min

For best performance select batteries with at least 2.5 Ah

<sup>1)</sup> Battery capacity (2x batteries required)

<sup>2)</sup> Max. operating time per battery charge

## **CORDLESS TILLER**

#### GE-CR 18/20 Li E

PXC battery voltage	18 V	
Working width	20 cm	
Working depth	200 mm	
Number of blades	4 pcs	
Cultivator blade diameter	155 mm	
Housing material	Plastic	
Product weight	3.9 kg	
Article only available without battery / charger	Article number 3431210	4 006825 654974

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;&gt;</b> <sup>2)</sup>	20-25	20-35	30-40	40-50	50-70	70-90	80-100	100-140
	min							

 $^{\scriptscriptstyle D}$  Battery capacity  $^{\scriptscriptstyle 2)}$  Max. running time per battery charge - depending on the selected speed

## **CORDLESS SNOW THROWER**

#### **GE-ST 36/40 Li E Brushless**

PXC battery voltage	2x ′	18 V					
Working width		40 (	m				
Max. snow height		20 (	m				
Throwing distance max.		6 m	l				
Housing material		Plastic					
Product weight		6.5 kg					
Article only available wit ies / chargers		cle numt 7011	ber		4 006825	659979	
	2.0	Ab	10.4h	ГD	A la	COAh	0.0.46

<b>10110</b> <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	15 min	20 min	25 min	30 min	40 min	50 min	60 min	80 min

For best performance select batteries with at least 4.0 Ah

 Battery capacity (2x batteries required)
 Max\_operating time per battery charge (specified performance is based on the assumption of ideal conditions)







## **CORDLESS SCYTHE**

#### AGILLO 36/255

PXC battery voltage	2x 18 V	
Cutting width (blade)	25.5 cm	
Cutting width (thread)	30 cm	
Thread diameter	2.0 mm	
Thread length	8 m	
Product weight	6.1 kg	
Blades	•	
Thread spool	•	
Comfort harness	•	
Article only available without batter- ies / chargers	Article number 3411320	4 006825 629583

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	20 min	30 min	35 min	45 min	65 min	80 min	90 min	130 min
<b>3</b> )	15 min	25 min	28 min	35 min	45 min	60 min	70 min	90 min

For best performance select batteries with at least 2.5 Ah
<sup>1)</sup> Battery capacity (2x batteries required)
<sup>2)</sup> Max. operating time per battery charge in idle mode (blade)
<sup>3)</sup> Max. operating time per battery charge in idle mode (thread spool)

## **CORDLESS SCYTHE**

#### AGILLO 18/200

PXC battery voltage	18 V	
Cutting width (blade)	20 cm	
Cutting width (thread)	30 cm	
Thread diameter	2.0 mm	
Thread length	8 m	
Product weight	6.5 kg	
Blades	•	
Thread spool	•	
Comfort harness	•	
Article only available without battery / charger	Article number 3411310	4 006825 651300

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	15 min	20 min	25 min	35 min	50 min	65 min	75 min	100 min
3)	10 min	12 min	15 min	20 min	30 min	45 min	55 min	60 min

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity

<sup>21</sup> Max. operating time per battery charge in idle mode (blade)
 <sup>33</sup> Max. operating time per battery charge in idle mode (thread spool)

#### **Cordless Scythes Accessories**

Spare Line Spool	Article number 3405096	4 006825 632767
Special Grass Blade 230	Article number 3436660	4 006825 637953
Thicket Blade 255	Article number 3405082	4 006825 632774
Thicket Blade 200	Article number 3405083	4 006825 651454
Grass Blade 255	Article number 3404996	4 006825 607239
Grass Blade 230	Article number 3436661	4 006825 637960





## **CORDLESS LAWN TRIMMER**

#### GE-CT 36/30 Li E

PXC battery voltage	2x 18 V
Cutting width	30 cm
Thread diameter	2.0 mm
Thread length	8 m
Product weight	3.1 kg
Thread spool	•
Carrying strap	•
Article only available without batter- ies / chargers	Article number 3411300 4 006825 629187

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	20 min	30 min	38 min	45 min	60 min	75 min	90 min	120 min

3405096

For best performance select batteries with at least 2.5 Ah

<sup>1)</sup> Battery capacity (2x batteries required)

<sup>2)</sup> Max. operating time per battery charge in idle mode

```
004825 472747
```



#### GE-CT 18/33 Li E

Spare line spool

PXC ba	PXC battery voltage				18 V					
Cutting width				33 cm						
Thread diameter				2.0	mm					
Thread length				8 m	ı					
Product weight				2.7	kg					
Thread spool			•							
Carryin	g strap				•					
Article only available without battery / charger				icle numb 1270	ber		4 006825	671186		
<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah 3.0		Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah
<b>2</b> )	15 min	20 min	25 min 30 n		min	40 min	50 r	nin	60 min	80 min

 $^{\scriptscriptstyle D}$  Battery capacity  $^{\scriptscriptstyle 2)}$  Max. operating time per battery charge in idle mode

Spare line spool	3405096	4 006825 632767

## **CORDLESS LAWN TRIMMER**

#### GE-CT 18/30 Li

PXC ba	PXC battery voltage				18 V					
Cutting width				30	cm					
Thread diameter				1.6	mm					
Thread length				5 m	ı					
Product weight				2.1 kg						
Thread	spool				•					
Article only available without battery / charger				icle numb 1250	ber		4 006825	659399		
<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	.5 Ah 3.0		4.0 Ah	5.2 A	١h	6.0 Ah	8.0 Ah

20 min 30 min 38 min 45 min 60 min 75 min 90 min 120 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

Spare line spool	3405117	4 006825 662962

Geprüft & ifohle AGR Bd

- Long handle with ergonomic double bend
   Infinitely adjustable long handle
   Flower guard

- >> Automatic jog line feed
- >>> Split shaft
- >> 2-step electronic speed control
- >> Battery Protector
- >> Soft grip



➤ Motor head rotatable (90°) / tiltable (6 settings)

- ➤ Flower guard
- >> Automatic jog line feed
- >> Soft grip
- >> Telescopic long handle, infinitely adjustable





#### >> Adjustable handle

- >> Telescopic long handle
- >> Motor head rotatable (180°) / tiltable (3 settings) ≫ Flower guard

- Soft gripAutomatic feeding line spool

- Infinitely adjustable long handleTelescopic long handle, infinitely adjustable
- » Motor head rotatable (+/- 90°) / tiltable (5 settings)
- >>> Flower guard
- Storage compartment for spare blades
- ≫ Soft grip

## **CORDLESS LAWN TRIMMER**

#### GE-CT 18/28 Li TC

PXC ba	ttery volt	age			18 V					
Cutting width				28 cm						
Thread diameter				1.6 mm						
Thread length				5 m	ı					
Product weight				4.9 kg						
Article only available without battery			ery		icle numb 1212	ber		4 006825	654967	
/ charger				141	1212					
1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah		4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah
2)	30 min	40 min	45 min	min 50 m		60 min	70 r	nin	90 min	120 min

50 11111	-10 111111
 an a city	

Spare line spool

Battery capacity
 Max. operating time per battery charge in idle mode

004825 455214 3405116

## **CORDLESS LAWN TRIMMER**

#### GE-CT 18/28 Li

PXC battery voltage					18 V					
Cutting width				28 cm						
Thread diameter				1.6	mm					
Thread length				5 m						
Product weight			2.3 kg							
Article only available without battery / charger					cle numl 1242	ber		4 006825	655193	
1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah

<b></b> , ,	1.5 AN	2.0 AN	2.5 AN	3.0 AN	4.0 AN	5.2 AN	6.0 AN	8.0 AN	
<b>2</b> )	30 min	40 min	45 min	50 min	60 min	70 min	90 min	120 min	
Pattonic	anacity								

<sup>2)</sup> Max. operating time per battery charge in idle mode

Spare line spool	3405116	
Spare line Spool	5105110	1 004925 455214

## **CORDLESS LAWN TRIMMER**

#### GE-CT 18 Li

PXC battery voltage	18 V				
Battery charging time 18 V / 2.5 Ah	50 min				
Max. running time	65 min				
Cutting width	24 cm				
Product weight	1.8 kg (excl. battery)				
Plastic blades included	• (20 pcs)				
Incl. 1 battery (18 V 2.5 Ah Li-Ion) and 1 charger	Article number 3411219	4 006825 680812			
Without battery / charger	Article number 3411172	4 006825 588255			

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2)</b>	40 min	55 min	65 min	80 min	125 min	160 min	180 min	250 min

Battery capacity
 Max. operating time per battery charge in idle mode

20-piece spare blade set	3405730	4 006825 560404
50-piece spare blade box	3405736	4 006825 646283





**NEW** 

- >> Soft grip
- Solid grip
   Change of cutting mode possible (thread spool available as accessory)
   Innovative blade technology

Infinitely adjustable long handleTelescopic long handle, infinitely adjustable Motor head rotatable (180°) / tiltable (3 settings)

Two cutting modes (blade and thread spool)
 Innovative blade technology

>> Storage compartment for spare blades

## **CORDLESS LAWN TRIMMER**

## GE-CT 18/25 Li

PXC battery voltage	18 V	
Cutting width	25 cm	
Product weight	2.0 kg	
Plastic blades included	• (20 pcs)	
Article only available without battery / charger	Article number 3411255	4 006825 680416

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	32 min	42 min	53 min	63 min	84 min	110 min	126 min	168 min
<b>3</b> )	30 min	40 min	50 min	60 min	80 min	104 min	120 min	160 min

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. operating time per battery charge in idle mode (blade)
 <sup>3)</sup> Max. operating time per battery charge in idle mode (thread spool)

Spare line spool	3405113	4 006825 680393
20-piece spare blade set	3405738	4 006825 681130
50-piece spare blade box	3405739	4 006825 681147
Thread head set	3405175	4 006825 680454

## **CORDLESS LAWN TRIMMER**

#### GE-CT 18/25-1

PXC battery voltage				18	V					
Cutting width				25 cm						
Product weight				2.0	kg					
Plastic blades included				• (20 pcs)						
Thread Head Set				•						
Article only available without battery / charger					cle numb 1256	ber		4 006825	684117	
<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2 A	۱h	6.0 Ah	8.0 Ah

60 min

42 min 53 min 63 min 84 min 110 min 126 min 168 min

80 min

104 min 120 min

160 min

Rattony	conacity	

32 min

30 min

40 min

<sup>2)</sup> Max. operating time per battery charge in idle mode (blade)
 <sup>3)</sup> Max. operating time per battery charge in idle mode (thread spool)

50 min

Spare line spool	3405113	4 006825 680393
20-piece spare blade set	3405738	4 006825 681130
50-piece spare blade box	3405739	4 006825 681147

## CORDLESS LAWN TRIMMER

#### GC-CT 18/24 Li

PXC battery voltage	18 V	
Cutting width	24 cm	
Product weight	1.3 kg	
Plastic blades included	• (20 pcs)	
Article only available without battery / charger	Article number 3411123	4 006825 626582

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>xxx</b> <sup>2)</sup>	40 min	55 min	65 min	80 min	125 min	160 min	180 min	250 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

20-piece spare blade set	3405730	4 006825 560404
50-piece spare blade box	3405736	4 006825 646283

>> Infinitely adjustable long handle

>> Telescopic long handle, infinitely adjustable

>>> Flower guard

>> Flower guard

≫ Soft grip



>> Additional handle >> Housing and additional handle made of impact-resistant plastic

➤ Motor head rotatable 180°

Soft grip
 Innovative blade technology

Infinitely adjustable long handleSplit shaft

- Cutting depth adjustment
   Rollers

➤ Soft grip

## **CORDLESS LAWN TRIMMER**

#### GC-CT 18/24 Li P

PXC battery voltage	18 V		
Battery charging time 18 V / 1.5 Ah	120 min		
Max. running time	40 min		
Cutting width	24 cm		
Product weight	1.2 kg (excl. battery)		
Plastic blades included	• (20 pcs)		
Incl. 1 battery (18 V 1.5 Ah Li-Ion) and 1 charger	Article number 3411102	4 006825 626575	
Without battery / charger	Article number 3411104	4 006825 635690	

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> <sup>2)</sup>	40 min	55 min	65 min	80 min	125 min	160 min	180 min	250 min

Battery capacity
 Max. operating time per battery charge in idle mode

20-piece spare blade set	3405730	4 006825 560404
50-piece spare blade box	3405736	4 006825 646283

## **CORDLESS LAWN TRIMMER**

## GC-CT 18/2411 Li P

PXC battery voltage	18 V	
Cutting width	24 cm	
Product weight	1.2 kg	
Plastic blades included	• (20 pcs)	
Article only available without battery	Article number	4 006825 680409
/ charger	3411115	4 <sup>  </sup> 006825 <sup>  </sup> 680409 <sup>  </sup>

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	35 min	46 min	58 min	69 min	92 min	120 min	138 min	184 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

20-piece spare blade set	3405738	4 006825 681130
50-piece spare blade box	3405739	4 006825 681147

## **CORDLESS LAWN EDGE TRIMMER**

#### GE-LE 18/190 Li

PXC ba	PXC battery voltage					18 V					
Min. cutting depth						34 mm					
Max. cutting depth						mm					
Blade l	ength				178	mm					
Produc	t weight				3.0 kg						
Article / charg		lable with	nout batt	ery	Article number 3424300 4 006825 651287					651287	
<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah	
<b>2</b> )	20 min	25 min	33 min	45	min	55 min	65 r	nin	75 min	110 min	

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

006825 653 3405101

Spare blade



## **NEW** Summer 2025 >>> Electronic speed control Flectronic speed control Height-adjustable guide wheel Infinitely adjustable long handle Adjustable additional handle incl. brush storage compartment Brush change without tools

## CORDLESS GROUT CLEANER

#### GE-CC 18/110 Li E

PXC ba	ttery volt	age			18 V						
Diamet	Diameter of brush					110 mm					
Product weight						kg					
Incl. steel brush (15 mm wide)											
Incl. ny	lon brusł	ר (10 mm	wide)		•						
Article / charg	only avai er	lable with	nout batt	ery	Article number 3424070 4 006825 681918						
<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah	
<b>3333</b> <sup>2)</sup>	40-55 min	55-70 min	70-85 min			110-140 min	140-165 min		165-220 min	220-280 min	

 $^{\rm D}\,$  Battery capacity  $^{\rm 2}\,$  Max. operating time per battery charge in idle mode - depending on the selected speed

Spare brush steel (15 mm)	3424140	4 006825 683127
Spare brush nylon (10 mm)	3424145	4 006825 683134
	3424150	4 006825 683141

- >>> Garden hose connection inclusive water control valve
- >> Forward/reverse running
- >> Electronic speed control



## **CORDLESS SURFACE BRUSH**

#### PICOBELLA 18/215

PXC ba	ttery volt	age			18 V						
Max. w	Max. working width					215 mm					
Diameter of brush					115	mm					
Idle speed					800	) - 1400 n	nin-1				
Produc	t weight				4.1	kg					
Incl. su	Incl. surface brush					MEDIUM (smooth stone, e.g. tiles and concrete)					
Article / charg	only avai er	lable witl	hout batt	ery	Article number 3424200 4 006825 645767					645767	
<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah	
<b>2</b> )	8-25 min	10-30 min	12-34 min	17. m	-46 in	20-55 min	25- mi		29-90 min	40-110 min	

**33** 8-25 min <sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode – dependent on the selected speed

#### Surface Brush PICOBELLA 18/215 Accessories

	Туре	Article number	EAN	Material	Working width	Diameter of brush	Suitable for
	Surface Brush SOFT	3424121	4 006825 646252	Nylon	195 mm	115 mm	Wood, artificial turf
	Surface Brush MEDIUM (incl. side brush)	3424120	4 006825 646245	Nylon	215 mm	115 mm	stone
(animi) (animi)	Surface Brush ULTRA	3424122	4 006825 646269	Steel	195 mm	115 mm	stone (robust)
) (alert	Surface Brush ULTRA (incl. side brush)	3424126	4 006825 660845	Steel	215 mm	115 mm	stone (robust)



- Splash water protection IPX4
   Electronic speed control (2 settings)
   Toolless brush/pad change
   Battery cover
   Splash guard brush cover (removable)
   Multifue stick and instance for index (1)

- >> Multifunctional application for indoor/outdoor, for furniture, car, garden, kitchen/bathroom

## **CORDLESS SURFACE BRUSH**

## PICOBELLA 18/90

PXC ba	ttery volt	age			18 V						
Workin	ıg width				90-170 mm						
Bristle length						50 mm					
Idle sp	eed				190	- 350 mi	n-1				
Produc	t weight				1.5	kg					
Brushe	s include	d			SO	T 120/50	) + M	EDI	JM 90/20	)	
Pad set	t includeo	Ł			• (melamine, microfibre, kitchen fibre - 1 of each)						
Wall m	ount incl	uded			•						
Article / charg	only avai er	lable witl	hout batt	ery	Article number 3424220 4 006825 671759					671759	
<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah	
<b>2</b> )	110-160 min	150-210 min	190-260 min		-315 iin	300-420 min	390- mi		450-630 min	600-840 min	

 $^{\rm D}\,$  Battery capacity  $^{\rm Z}\,$  Max, operating time per battery charge in idle mode – dependent on the selected speed

	Туре	Article number	EAN	Material	Working width	Bristle length	Suitable for
Ţ	Brush SOFT 170/40	3424130	4 006825 673081	Nylon	170 mm	40 mm	Sensitive surfaces
Y	Brush SOFT 120/50	3424131	4 006825 673098	Nylon	120 mm	50 mm	Sensitive surfaces
	Brush MEDIUM 90/20	3424132	4 006825 673104	Nylon	90 mm	20 mm	Robust surfaces
	Brush ULTRA 95/25 (brass)	3424133	4 006825 673111	Brass	95 mm	25 mm	Stubborn soiling
••	Pad Set (6 pcs)	3424134	4 006825 673128	Melamine / mi- crofibre / kitchen fibre pad (2 of each)	100 mm	-	Melamine pad for smooth surfaces (e.g. plastic/glass/ walls/doors), microfibre pad for sensitive surfaces (e.g. glass/fittings/sinks/ hobs), kitchen pad for resistant surfaces (e.g. tempered glass/cast iron)

## Surface Brush PICOBELLA 18/90 Accessories



>> Cutting collector

>> Metal gear box





>> Ergonomic front handle thanks to micro switches

>> Laser-cut and diamond-ground blades

Soft grip
 Aluminium cover over cutters

## **CORDLESS HEDGE TRIMMER**

#### GE-CH 36/65 Li

PXC battery voltage	2x 18 V	
Bar length	720 mm	
Cutting length	650 mm	
Spacing between teeth	30 mm	
Product weight	4.0 kg	
Protective cover with wall mount	•	
Article only available without batter- ies / chargers	Article number 3410960	4 006825 639018

<b>20</b> 60 min 75 min 93 min 120 min 150 min 180 min 225 min 300 min		<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	3	2)	60 min	75 min	93 min	120 min	150 min	180 min	225 min	300 min

<sup>1)</sup> Battery capacity (2x batteries required)
 <sup>2)</sup> Max. operating time per battery charge in idle mode



#### >> Cutting collector

- >> Laser-cut and diamond-ground blades
- ➤ Metal gear box
- Soft grip
   Aluminium cover over cutters

## **CORDLESS HEDGE TRIMMER**

#### GE-CH 36/61 Li

PXC ba	ttery volt	age			2x <sup>-</sup>	18 V				
Bar len	gth				670 mm					
Cutting	length				610 mm					
Spacing	g betwee		26 mm							
Produc	t weight		2.8 kg							
Protect	ive cover	r with wa	ll mount		•					
Article ies / ch		lable with	hout batt	er-		icle numb 0965	ber		4 006825	662382
<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah
<b>2)</b> 54 min 72 min 80 min 10					min	144 min	168 ו	min	210 min	288 min

<sup>1)</sup> Battery capacity (2x batteries required)
 <sup>2)</sup> Max. operating time per battery charge in idle mode



## **CORDLESS HEDGE TRIMMER**

#### GE-CH 18/60 Li

PXC ba	ttery volt	age			18	V				
Bar len	gth				670 mm					
Cutting	length				600 mm					
Spacing	g betwee		22 mm							
Product weight						2.8 kg				
Protect	Protective cover with wall mount									
Article / charg		lable witl	hout batt	ery		cle numb 0930	ber		4 006825	635942
<b>1</b> )	1.5 Ah 2.0 Ah 2.5 Ah 3						.0 Ah 4.0 Ah 5.2 Ah 6.0 Ah			8.0 Ah
<b>2</b> )	35 min 45 min 53 min 70				min	90 min	110 ו	min	135 min	180 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

- >> Metal gear box
- >> Soft grip
- >> Aluminium cover over cutters



>> Soft grip

Metal gear box
 Soft grip
 Aluminium cover over cutters

# >> Turnable rear handle Cutting collector Laser-cut and diamond-ground blades ➤ Metal gear box

## **CORDLESS HEDGE TRIMMER**

#### **ARCURRA 18/55**

PXC battery voltage			18	/				
Bar length			620 mm					
Cutting length		550 mm						
Spacing between teeth		18 mm						
Product weight		2.7 kg						
Protective cover with wa	ll mount		•					
Article only available with / charger	ery		cle numb 0920	ber		4 006825	635935	
	~ ~		104			C O 41		

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2)</b>	35 min	45 min	53 min	70 min	90 min	110 min	135 min	180 min
1) D								

<sup>1)</sup> Battery capacity <sup>2)</sup> Max. operating time per battery charge in idle mode

## **CORDLESS HEDGE TRIMMER**

#### GC-CH 1855/1 Li

PXC battery volt	age			18	/				
Battery charging	g time 18	V/2.5 A	h	50 ı	min				
Max. running tir	ne			100	min				
Bar length				620 mm					
Cutting length				550 mm					
Spacing betwee			18 mm						
Product weight		2.3 kg							
Protective cover	' with wa	ll mount		•					
Incl. 1 battery (1 and 1 charger	8 V 2.5 A	Ah Li-Ion	)	-	cle numł 0506	ber		4 006825	661910
Without battery	/ charge	r		-	cle numb 0502	ber		4 006825	615937
1) 1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah

2)	60 min	80 min	100 min	120 min	160 min	210 min	240 min	320 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode



## **CORDLESS HEDGE TRIMMER**

#### GC-CH 18/50 Li

PXC battery voltage	18 V				
Bar length	550 mm				
Cutting length	500 mm				
Spacing between teeth	17 mm				
Product weight	2.2 kg				
Protective cover with wall mount	•				
Article only available without battery / charger	Article number 3410945 4 006825 664522				

	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	40 min	53 min	67 min	80 min	106 min	139 min	160 min	212 min
Detters :								

Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode



>> Aluminium cover over cutters





## **CORDLESS HEDGE TRIMMER**

#### GC-CH 1846 Li

PXC bat	tery volt	age			18	V				
Bar leng	gth				520	mm				
Cutting	length		460 mm							
Spacing	betwee		15 mm							
Product weight						2.0 kg				
Protecti	ve covei	r with wa	ll mount		•					
Article c / charge		tery		cle numt 0642	ber		4 006825	588293		
1)	1 5 Ah	2 0 Ah	2 5 Ah	30	Ah	/ 0 Ah	5.2	Ah	6 O Ab	8 0 Ah

	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	60 min	80 min	100 min	120 min	160 min	210 min	240 min	320 min

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. operating time per battery charge in idle mode



#### GC-CH 18/40 Li

PXC battery voltage	18 V								
Bar length	475	mm							
Cutting length				mm					
Spacing between teeth				mm					
Product weight				2.0 kg					
Protective cover with wall mount				•					
Article only available without battery / charger				Article number 3410940			4 006825 661125		
		1 2 0		4.0.41	E 2	A 1	C O 41	0.0.41	

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	40 min	53 min	67 min	80 min	106 min	139 min	160 min	212 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode



#### **Maintenance Spray**

Suitable for	Hedge trimmers, grass and shrub shears
Article number	3403099
EAN	4 006825 654608

## CORDLESS OLIVE AND FRUIT HARVESTER

#### GE-FS 18/53 Li

PXC battery voltage	18 V						
Max. working width	53 cm						
Min. working width	28 cm						
Pin length	31 cm						
Product weight	4.4 kg						
Article only available without / charger		cle numb 1400	ber	4 006825	670738		
1.5 Ah 2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;&gt;</b> <sup>2)</sup>	20-34 min	27-45 min	34-56 min	40-68 min	54-90 min	69-117 min	80-136 min	108-181 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode - depending on the selected speed

Spare pins for PXC Olive and Fruit Harvester	3405231	4 006825 672886



>> Continuously adjustable telescopic aluminium handle

- Additional handle
   Additional holding area
   Changeable carbon pins





## CORDLESS MULTIFUNCTIONAL TOOL

#### **GE-LM 36/4in1 Li Brushless**

PXC battery voltage	2x 18 V			
Bar length (chainsaw)	200 mm			
Chain cutting speed	10 m/s			
Blade length of hedge trimmer	450 mm			
Spacing between teeth (hedge trimmer)	24 mm			
Cutting width (blade)	255 mm			
Cutting width (thread)	330 mm			
Max. working height of elevated tools	3.5 m (pruner) / 3.5 m (hedge trimmer)			
Product weight	9.0 kg (incl. all attachments)			
Protective cover with wall mount	•			
Article only available without batter- ies / chargers	Article number 3410901 4 006825 651638			

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	26 min	34 min	41 min	54 min	68 min	86 min	108 min	136 min
3)	20 min	27 min	33 min	44 min	54 min	66 min	88 min	108 min
4)	20 min	28 min	33 min	40 min	56 min	66 min	80 min	112 min
<b>333</b> <sup>5)</sup>	60 pcs	80 pcs	100 pcs	120 pcs	160 pcs	200 pcs	240 pcs	320 pcs

<sup>1</sup> Battery capacity (2x batteries required)
 <sup>2</sup> Max. operating time per battery charge in idle mode (soythe)
 <sup>3</sup> Max. operating time per battery charge in idle mode (lawn trimmer)
 <sup>4</sup> Max. operating time per battery charge in idle mode (telescopic hedge trimmer)
 <sup>5</sup> Max. cuts through 70 x 70 mm square timber per battery charge (pole-mounted pruner)

Spare chain 20cm 1,1 33T 3/8	4500187	4 006825 615463
Spare bar 20cm 1,2	4500117	4 006825 569100
Thicket blade 255 mm	3405082	4 006825 632774
Spare spool	3405102	4 006825 674224
Spare spool	3405102	4

## FITTED WITH OREGON >> Continuously adjustable telescopic aluminium handle

- >> Main handle + motor head tiltable by several settings

- OREGON quality bar and chain
   Toolless chain tensioning and changing
   Pivotable attachment for effortless horizontal cuts
- >> Automatic chain lubrication



## CORDLESS MULTIFUNCTIONAL TOOL

#### GE-HC 18 Li T

PXC battery voltage	18 V			
Battery charging time 18 V / 3.0 Ah	60 min			
Max. running time	40 min			
Bar length (chainsaw)	200 mm			
Chain cutting speed	3.76 m/s			
Max. bar length (hedge trimmer)	450 mm			
Spacing between teeth (hedge trimmer)	16 mm			
Max. working height	4.0 m (pruner) / 3.5 m (hedge trimmer)			
Product weight	6.2 kg (incl. all attachments. excl. battery)			
Incl. 1 battery (18 V 3.0 Ah Li-lon) and 1 charger	Article number 3410805	4 006825 601329		
Without battery / charger	Article number 3410800	4 006825 601275		

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	30 pcs	40 pcs	48 pcs	60 pcs	75 pcs	100 pcs	120 pcs	150 pcs
<b>3</b> )	20 min	30 min	35 min	40 min	60 min	75 min	80 min	120 min

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. cuts through 70 x 70 mm square timber per battery charge (pole-mounted pruner) <sup>3)</sup> Max. operating time per battery charge in idle mode (telescopic hedge trimmer)

Spare chain 20cm 1,3 33T 3/8	4500188	4 006825 606355
Spare bar 20cm 1,3	4500168	4 006825 606348



- Continuously adjustable telescopic aluminium handle
   Main handle + motor head tiltable by several settings
   OREGON quality bar and chain
- >> Toolless chain tensioning and changing
- >> Pivotable attachment for effortless horizontal cuts
- >> Automatic chain lubrication
- >>> Claw stop

>>> Claw stop

>> Metal gear box >> Additional holding area

- Metal gear box
  Adjustable second handle

## **CORDLESS POLE-MOUNTED PRUNER**

## GE-LC 18 Li T

FITTED WITH

OREGON

PXC battery voltage	18 V				
Bar length	200 mm				
Cutting length	170 mm				
Cutting speed	3.76 m/s				
Max. working height	4.0 m				
Product weight	4.0 kg				
Article only available without battery / charger	Article number 3410810 4 006825 604337				
	3410810 4 006825 604337				


L	<b></b> , ,	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
Γ	2)	30 pcs	40 pcs	48 pcs	60 pcs	75 pcs	100 pcs	120 pcs	150 pcs
_									

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 20cm 1,3 33T 3/8	4500188	4 006825 606355
Spare bar 20cm 1,3	4500168	4 006825 606348



EAN	4 006825 624649
Article number	3410818
Product weight	1.4 kg
Can be used for	GE-LC 18 Li T



## **CORDLESS POLE-MOUNTED PRUNER**

#### GC-LC 18/20 Li T

PXC battery voltage	18 V	
Bar length	200 mm	
Cutting length	195 mm	
Cutting speed	5.5 m/s	
Max. working height	4.0 m	
Product weight	3.4 kg	
Article only available without battery / charger	Article number 3410581	4 006825 652123

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	37 pcs	50 pcs	65 pcs	75 pcs	100 pcs	130 pcs	155 pcs	200 pcs

For best performance select a battery with at least 2.5 Ah

Battery capacity
 Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 20cm 1,1 33T 3/8	4500187	4 006825 615463
Spare bar 20cm 1,2	4500117	4 006825 569100

33



- Continuously adjustable telescopic aluminium handle
   Motor head tiltable by multiple settings
   Main handle tiltable by multiple settings
   Laser-cut and diamond-ground blades

- >> Metal gear box
- ➤ Adjustable second handle

## CORDLESS TELESCOPIC HEDGE TRIMMER

## GE-HH 18/45 Li T

PXC battery voltage	18 V	
Bar length	450 mm	
Cutting length	400 mm	
Spacing between teeth	16 mm	
Max. working height	3.5 m	
Product weight	4.3 kg	
Article only available without battery / charger	Article number 3410866	4 006825 630602

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> <sup>2)</sup>	20 min	30 min	35 min	40 min	60 min	75 min	80 min	120 min

For best performance select a battery with at least 2.5 Ah

Battery capacity
 Max. operating time per battery charge in idle mode



#### **Pole Pruner**

Can be used for	GE-HH 18/45 Li T
Product weight	1.2 kg
Article number	3410835
EAN	4 006825 624656

- Telescopic aluminium handle with extension
   Motor head tiltable by multiple settings
   Laser-cut and diamond-ground blades

- >> Metal gear box
- Swivelling main handle
   Additional holding area

## CORDLESS TELESCOPIC HEDGE TRIMMER GC-HH 18/45 Li T

PXC battery voltage	18 V
Bar length	450 mm
Cutting length	410 mm
Spacing between teeth	18 mm
Max. working height	3.5 m
Product weight	3.0 kg
Article only available without battery	Article number 3410585 4 006825 652130
/ charger	3410585 4 006825 652130

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	20 min	28 min	33 min	40 min	56 min	66 min	80 min	112 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode







- >>> Brushless motor
- >> OREGON quality bar and chain
- >> Toolless chain tensioning and changing
- >> Automatic chain lubrication

- Adjustable chain speed (High/Eco)
   Sturdy stop claws made of metal
   Kickback protection with mechanical instant chain brake
- >>> Chain catch bolt
- >> Soft grip
- ➤ Large oil filler opening

## **NEW** Autumn 2025 Einhell

- >>> Brushless motor
- >> Toolless chain tensioning and changing
- >> Automatic chain lubrication
- >> Sturdy stop claws made of metal
- >> Kickback protection with mechanical instant chain brake
- >> Chain catch bolt
- Soft grip
   Large oil filler opening



- Toolless chain tensioning and changing
- >> Automatic chain lubrication
- >>> Sturdy stop claws made of metal
- >> Kickback protection with mechanical instant chain brake
- >>> Chain catch bolt
- >> Soft grip
- ➤ Large oil filler opening

## **CORDLESS CHAINSAW**

## FORTEXXA 18/30

PXC battery voltage	18 V	
Petrol equivalence class	up to 2.0 hp	
Bar length	300 mm	
Cutting length	270 mm	
Cutting speed	8.9 / 6 m/s	
Oil tank capacity	160 ml	
Product weight	4.0 kg	
Protective cover	•	
Article only available without battery / charger	Article number 4600010	4 006825 656572

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	53 pcs	70 pcs	88 pcs	105 pcs	140 pcs	182 pcs	210 pcs	280 pcs
<b>3</b> )	59 pcs	78 pcs	98 pcs	117 pcs	156 pcs	203 pcs	234 pcs	312 pcs

For best performance select a battery with at least 4.0 Ah

Battery capacity

- <sup>2)</sup> Max. cuts through 70 x 70 mm square timber per battery charge in HIGH POWER mode
- $^{3)}$  Max. cuts through 70 x 70 mm square timber per battery charge in ECO mode

Spare chain 30cm 1,1 45T 3/8	4500192	4 006825 663532
Spare bar 30cm 1,1	4500191	4 006825 663518

#### **CORDLESS CHAINSAW**

#### **GE-LC 18/25 Li Brushless**

PXC battery voltage				18 V						
Petrol e	quivaler	nce class			up	to 2.0 hp				
Bar leng	gth				250	mm				
Cutting	length				230	mm				
Cutting	speed				7.0	m/s				
Oil tank capacity			150 ml							
Product weight			3.5 kg							
Protecti	Protective cover			•						
Article only available without battery / charger				cle numb 0070	ber		4 006825	682977		
<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah
<b>333</b> <sup>2)</sup>	34 pcs	44 pcs	67 pcs	71	pcs	100 pcs	145	pcs	181 pcs	242 pcs

For best performance select a battery with at least 4.0 Ah

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 25cm 1,1 40T 3/8	4501754	4 006825 607024
Spare bar 25cm 1,1	4501753	4 006825 607017

## **CORDLESS CHAINSAW**

#### GE-LC 18/25-1 Li

PXC battery voltage	18 V	
Petrol equivalence class	up to 1.5 hp	
Battery charging time 18 V / 3.0 Ah	60 min	
Bar length	250 mm	
Cutting length	230 mm	
Cutting speed	4.5 m/s	
Oil tank capacity	200 ml	
Product weight	2.9 kg	
Protective cover	•	
Incl. 1 battery (18 V 3.0 Ah Li-Ion) and 1 charger	Article number 4501760	4 006825 608335
Without battery / charger	Article number 4501761	4 006825 608342

L	<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	<b>2</b> )	50 pcs	70 pcs	85 pcs	100 pcs	130 pcs	180 pcs	200 pcs	260 pcs

For best performance select a battery with at least 2.5 Ah

Battery capacity
 Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 25cm 1,1 40T 3/8	4501754	4 006825 607024
Spare bar 25cm 1,1	4501753	4 006825 607017

S





>>> Brushless motor

- ➤ Metal gear box
- >> Toolless guide bar and chain change
- High-quality guide bar and chain change
   High-quality guide bar and chain set
   Hand guard and folding chain cover
   Storage surface for use with both hands
   Soft grip

## **CORDLESS PRUNING CHAINSAW**

## GE-PS 18/15 Li Brushless

PXC battery voltage				18	V				
Bar length				158	3 mm				
Cutting length				125	5 mm				
Cutting speed				4.8	m/s				
Product weight				1.1	kg				
Protective cover			•						
Measuring help for oiling the chain			•						
Hexagon key for retensioning the chain			•						
Article only available without battery / charger				icle numb 10040	ber		4 006825	671612	
1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.27	Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup> 95 pcs	127 pcs	158 pcs	190	pcs	254 pcs	329	OCS	380 pcs	506 pcs

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. cuts per battery charge through soft roundwood (ø 50 mm)

Spare chain 15cm 1,0 28T 7,62	4500174	4 006825 673647
Spare bar 15cm 1,0	4500163	4 006825 672503

#### **Chainsaw Trestle**

enanisan nesele	
Profile thickness	1.9 mm
Maximum load capacity	150 kg
For tree trunks up to a diameter of	approx. 30 cm
Product weight	7.1 kg
Article number	4500067
EAN	4 006825 548693 <sup>1</sup>

#### **Chainsaw Trestle 2.5**

1.1	Profile thickness	2.5 mm
X	Maximum load capacity	200 kg
¥	For tree trunks up to a diameter of	approx. 30 cm
M	Product weight	8.9 kg
/	Article number	4500690
ſ	EAN	4 006825 678826 <sup>11</sup>



#### **Forest Safety Helmet**

Head circumference	52-66 cm				
Product weight	0.7 kg				
Article number	4500480				
EAN	4 006825 544565				

Depth stopScale for precise setting

of the grinding angle

➤ LED light Clamping device



## **CORDLESS CHAIN SHARPENER**

#### GE-CS 18 Li

PXC ba	PXC battery voltage					V				
Grindir	rinding wheel diameter (inside)				23 mm					
Grindir	Grinding wheel diameter (outside)				108 mm					
Grindir	Grinding wheel thickness				3.2 mm					
Produc	Product weight Article only available without battery / charger				1.7 kg					
					Article number 4499940			4 006825 613858		
<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah		4.0 Ah	5.2 Ah		6.0 Ah	8.0 Ah
2)	180 min	240 min	300 min	390	min	480 min	660 min		780 min	960 min

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. operating time per battery charge in idle mode

Spare grinding wheel 3.2 mm	4500076	4 006825 548860
Spare grinding wheel 4.5 mm	4500071	4 006825 548853





# **CORDLESS PRUNING SAW**

# GE-GS 18/150 Li

PXC battery voltage				18 V						
Saw bla	ade lengt	h			151	mm				
Cutting	capacity	with bra	inch han	dle	80	mm				
Cutting capacity without branch handle				100 mm						
Produc	t weight				1.1 kg					
Article / charg	only avai er	lable wit	hout batt	ery		icle numb 18290	ber		4 006825	666649
<b>1</b> )	1.5 Ah 2.0 Ah 2.5 Ah 3.1				Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah
<b>20</b> 70 pcs 90 pcs 115 pcs 140 pcs 180 pcs 240 pcs 280 pcs 360						360 pcs				
	Battery capacity									

<sup>2)</sup> Max. cuts per battery charge through roundwood (ø 60 mm)

Saw blade set, 3-piece, wood/metal	49576105	4 009315 761053



# **CORDLESS PRUNING SHEARS**

### GE-LS 18 Li

PXC battery voltage					V			
Max. branch diameter					mm			
Produc	t weight			0.8	kg			
Article only available without battery / charger				icle numl 08300	ber	4 006825	652727	
<b>1)</b>	1.5 Ah 2.0 Ah 2.5 Ah 3.0			3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	1070 pcs	1426 pcs	1783 pcs	2139 pcs	2852 pcs	3708 pcs	4278 pcs	5704 pcs

 $^{\scriptscriptstyle 1)}$  Battery capacity  $^{\scriptscriptstyle 2)}$  Max. cuts per battery charge through round dry beech wood (ø 15 mm)



- >> Multi-part pipe with bayonet mount
- >>> Electronic speed control (LED)
- >> 3-in-1: leaf blower, workshop blower or barbecue lighting aid

# CORDLESS UNIVERSAL BLOWER

# GE-UB 18/250 Li E

PXC battery voltage	18 V		
Battery charging time 18 V / 4.0 Ah	75 min		
Max. running time	20-130 min		
Max. blow velocity	250 km/h		
Max. blowing air flow	120 m³/h		
Idle speed	4500 - 15000 min <sup>-1</sup>		
Product weight	1.1 kg (excl. batte	ery)	
Incl. 1 battery (18 V 4.0 Ah Li-lon) and 1 charger	Article number 3433560	4 006825 679793	
Without battery / charger	Article number 3433542	4 006825 659405	

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	7-48 min	10-65 min	12-80 min	14-96 min	20-130 min	24-166 min	28-192 min	40-260 min

For best performance select a battery with at least 2.5 Ah

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. operating time per battery charge in idle mode – dependent on the selected speed



# **CORDLESS LEAF BLOWER**

### GC-CL 18 Li E

PXC battery voltage	18 V	
Max. blow velocity	210 km/h	
Max. blowing air flow	105 m³/h	
Idle speed	1400 - 12000 min	-1
Product weight	1.3 kg	
Article only available without battery / charger	Article number 3433532	4 006825 610246
/ charger		4 006825 610246

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	10-180 min	14-240 min	16-300 min	20-390 min	26-480 min	40-660 min	42-720 min	52-960 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode – dependent on the selected speed

### >> Toolless change-over between suction and blasting function

- **»** Brushless motor
- Didshield intervention
   Electronic speed control
   Additional handle
- Guiding wheels
   Debris bag with window
- ➤ Carrying strap
- >> Soft grip



# **CORDLESS LEAF VACUUM**

### **VENTURRO 18/210**

PXC battery voltage	18 V	
Max. blow velocity	210 km/h	
Max. suction power	500 m³/h	
Idle speed	8000 - 14000 min	-1
Shredding function	10:1	
Debris bag volume	45 l	
Product weight	3.0 kg	
Article only available without battery / charger	Article number 3433625	4 006825 663631

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	0-12 min	0-14 min	5-18 min	7-20 min	9-30 min	11-42 min	15-45 min	18-60 min
<b>3</b> )	3-10 min	4-15 min	5-19 min	7-22 min	9-32 min	13-40 min	14-48 min	18-64 min

For best performance select a battery with at least 3.0 Ah

 <sup>a)</sup> Battery capacity
 <sup>a)</sup> Max. operating time per battery charge in idle mode (vacuuming mode) – dependent on the selected <sup>3</sup> Max. operating time per battery charge in idle mode (blowing mode) – dependent on the selected

speed



### Finhell

- >> Toolless change-over between suction and blasting function
- Brushless motor
   Electronic speed control
   Additional handle (adjustable)
- ➤ Guiding wheels
- >> Debris bag with window
- >> Carrying strap >> Soft grip

# **CORDLESS LEAF VACUUM**

### **GE-CL 36 Li E Brushless**

PXC battery voltage	2x 18 V
Max. blow velocity	210 km/h
Max. suction power	720 m³/h
Idle speed	8000 - 13000 min <sup>-1</sup>
Shredding function	10:1
Debris bag volume	45
Product weight	3.4 kg
Article only available without batter- ies / chargers	Article number 3433600 4 006825 613391

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> <sup>2)</sup>	9-20 min	10-30 min	13-35 min	17-45 min	22-65 min	27-90 min	30-100 min	44-130 min
<b>3</b> )	10-30 min	13-35 min	16-40 min	21-60 min	27-75 min	32-105 min	39-120 min	54-150 min

For best performance select batteries with at least 2.5 Ah

<sup>1)</sup> Battery capacity (2x batteries required) <sup>2)</sup> Max. operating time per battery charge in idle mode (vacuuming mode) – dependent on the selected

speed Max. operating time per battery charge in idle mode (blowing mode) – dependent on the selected speed

# **CORDLESS LEAF VACUUM**

### GE-CL 36/230 Li E

PXC battery voltage	2x 18 V			
Max. blow velocity	230 km/h			
Max. suction power	700 m³/h			
Idle speed	8000 - 14000 min <sup>-1</sup>			
Shredding function	10:1			
Debris bag volume	45			
Product weight	3.1 kg (blow) / 4.4 kg (vacuum)			
Article only available without batter-	Article number	4 006825 646511		
ies / chargers	3433630	4 006825 646511		

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	10-22 min	12-28 min	14-34 min	20-45 min	24-55 min	30-75 min	35-85 min	48-110 min
<b>3</b> )	4 min	5 min	7 min	11 min	13 min	17 min	20 min	26 min
<b>&gt;&gt;&gt;&gt;</b> <sup>4)</sup>	11-24 min	13-29 min	16-35 min	24-50 min	27-58 min	37-79 min	43-91 min	54-116 min
<b>5</b> )	6 min	7 min	8 min	13 min	15 min	20 min	23 min	30 min

For best performance select batteries with at least 2.5 Ah

<sup>1)</sup> Battery capacity (2x batteries required)

<sup>5</sup> Battery Capacity (2x Datteries required)
 <sup>5</sup> Max. operating time per battery charge in idle mode (vacuuming mode) – dependent on the selected speed
 <sup>5</sup> Max. operating time per battery charge in idle mode (TURBO vacuuming mode)
 <sup>6</sup> Max. operating time per battery charge in idle mode (blowing mode) – dependent on the selected speed
 <sup>5</sup> Max. operating time per battery charge in idle mode (TURBO blowing mode)

# **CORDLESS KNIFE SHREDDER**

### **REDAXXO 36/25**

PXC battery voltage	2x 18 V					
Idle speed	3000 min <sup>-1</sup>					
Max. branch diameter	25 mm					
Debris bag volume	55 I					
Product weight	10.5 kg					
Prodder incl.	•					
Garden rubbish bag	•					
Article only available without batter- ies / chargers	Article number 3430710 4 006825 6713					

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> <sup>2)</sup>	15 min	20 min	25 min	30 min	40 min	52 min	60 min	80 min

For best performance select batteries with at least 5.2 Ah

<sup>1)</sup> Battery capacity (2x batteries required)

<sup>2)</sup> Max. operating time per battery charge in idle mode

Spare blade	3405931	4 006825 672916



- >> Foldable cover to protect the batteries
- >> Motor protection switch
- >> 3 reversible blades made of special steel
- Fold-down hopper with safety lock
   Generous funnel opening
- >>> Transport wheels

>> Soft grip

>>> Transport handle





# CORDLESS GRASS AND SHRUB SHEARS

# GE-CG 18/100 Li T

	1011					
PXC battery voltage	18 V					
Cutting width with grass shear blade	100 mm					
Cutting length with shrub cutting blade	200 mm					
Spacing between teeth of shrub cutting blade	8 mm					
Product weight	1.9 kg (excl. battery)					
Incl. 1 battery (18 V 2.5 Ah Li-Ion) and 1 charger	Article number 3410316	4 006825 680829				
Without battery / charger	Article number 3410310 4 006825 65210					

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	180 min	240 min	300 min	360 min	480 min	650 min	720 min	960 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

# **CORDLESS GRASS AND SHRUB SHEARS**

### GE-CG 18/100 Li

18 V	
100 mm	
200 mm	
8 mm	
0.7 kg	
Article number 3410313	4 006825 652710
	100 mm 200 mm 8 mm 0.7 kg Article number

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	180 min	240 min	300 min	360 min	480 min	650 min	720 min	960 min

Battery capacity
 Max. operating time per battery charge in idle mode

# **CORDLESS GRASS AND SHRUB SHEARS**

# GC-CG 18 Li

PXC ba	ttery volt	age			18	/					
Cutting	; width w	ith grass	shear bl	ade	100	mm					
Cutting length with shrub cutting blade						mm					
Spacing cutting	g betwee blade	n teeth c	of shrub		8 mm						
Produc	t weight				0.7 kg						
Article only available without battery / charger					Article number 3410370				4 006825 614213		
<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah	

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	180 min	240 min	300 min	360 min	480 min	650 min	720 min	960 min

<sup>1)</sup> Battery capacity <sup>2)</sup> Max. operating time per battery charge in idle mode

# **CORDLESS GRASS AND SHRUB SHEARS**

# GC-CG 18/1 Li

PXC ba	PXC battery voltage					18 V					
Cutting width with grass shear blade					100	mm					
Product weight					0.7	kg					
	Article only available without battery / charger					Article number 3410382			4 006825 654875		
1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah		4.0 Ah	5.2 A	∖h	6.0 Ah	8.0 Ah	
2)	180 min	240 min	300 min	360 min		480 min	650 n	nin	720 min	960 min	

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode



- ➤ Metal gear box >> Soft grip





- POWER CHANGE
- >> Automatic pump, no manual pressure build-up required
- >> Transparent tank with scale for checking the level
- >> Individually adjustable brass nozzle
- Battery cover provides protection against water ingress
   Spray lance with lockable operating button
- Padded carrying strap
- ➤ Large filler opening



CORDLESS PRESSURE SPRAYER

### GE-WS 18/150 Li

		• =.									
PXC ba	ttery volt	age			18 V						
Filling capacity of the tank											
Max. spraying pressure						bar					
Pressu	re hose l	ength			140	0 mm					
Max. lie	quid tem	perature			40°C						
Produc	t weight				4.7 kg						
Article only available without battery / charger					Article number 3425230				4 006825 651362		
<b>1</b> )	15Ah	2 0 Ah	2 5 Ah	30	Ah	4 0 Ah	52/	۹h	6 0 Ah	8 0 Ah	

2) 8.5 h 2h 2.5 h 3.5 h 4 h 5h 7h 10 h

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. operating time per battery charge in idle mode

# CORDLESS PRESSURE SPRAYER

### GE-WS 18/75 Li

PXC battery voltage		18	V								
Filling capacity of the tar	capacity of the tank					7.5					
Max. spraying pressure		2.5	bar								
Pressure hose length	140	0 mm									
Max. liquid temperature	40°C										
Product weight		2.4 kg									
Article only available wit / charger	hout battery Article number 3425220 4 006825 64636					646368					
1.5 Ah 2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah			

	I.S AII	Z.U AIT	Z.S AII	3.0 AH	4.0 AT	D.Z AH	0.0 ATT	8.0 AT
<b>2</b> )	5 h	6 h	7.5 h	10 h	12 h	16 h	20 h	24 h
Datton	anacity							

Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

>> Automatic pump, no manual pressure build-up required

>> Automatic pump, no manual pressure

>> Transparent tank with scale for

>> Individually adjustable brass nozzle >> Telescopic lance made of stainless steel >> Battery cover – provides protection

>> Spray lance with lockable operating

>> Large clips on the tank – easy opening

build-up required

checking the level

against water ingress

>> Padded carrying strap

button

and closing

- >> Transparent tank with scale for checking the level
- >> Individually adjustable brass nozzle
- Telescopic lance made of stainless steel
   Battery cover provides protection
- against water ingress >> Spray lance with lockable operating button
- >> Large clips on the tank easy opening and closing
- >> Padded carrying strap



# CORDLESS PRESSURE SPRAYER

### GE-WS 18/35 Li

18 V
3.5
2.5 bar
1400 mm
40°C
2.2 kg
Article number 3425210 4 006825 645774

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	5 h	6 h	7.5 h	10 h	12 h	16 h	20 h	24 h

Battery capacity
 Max. operating time per battery charge in idle mode



Pressure Sprayer Accessory Ki	Pressure	Sprayer	Accessory	Kit
-------------------------------	----------	---------	-----------	-----

Telescopic spray lance	1 - 2 m
Product weight	0.25 kg
Article number	3425205
EAN	4 006825 664003



### Tank 7.5 litres

Filling capacity of the tank	7.51
Product weight	0.8 kg
Article number	3425206
EAN	4 006825 664065



- >> Automatic pump, no manual
- pressure build-up required Transparent tank with scale for **》** checking the level
- >> Individually adjustable brass nozzle
- >> Large clips on the tank easy opening and closing



# **CORDLESS PRESSURE SPRAYER**

# GE-WS 18/10 Li

PXC battery voltage					18 V					
Filling capacity of the tank					1.0					
Max. spraying pressure					1.3	bar				
Max. lic	quid tem	perature			40°	C				
Product weight					0.6 kg					
Article / charg	only avai er	lable with	hout batt	Article number 3425240 4 006825 669909					669909	
1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah
<b>2)</b>	12 h	16 h	20 h	24	1h	32 h	42	h	48 h	64 h

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode

- Locking switchSuitable for deflation
- >>> Two valve adapters
- >>> LED

>> Suitable for inflating rubber dinghies/ air mattresses/other leisure articles



# **CORDLESS AIR PUMP**

### CE-AP 18 Li

PXC battery voltage						18 V					
Air rate					670 l/min						
max. pressure					0.0	5 bar					
Product weight					0.4 kg (excl. battery)						
Article / charg		vailable without battery Article number 2070110 4 006825 658				658996					
<b>1</b> )	1.5 Ah	2.0 Ah	2 5 Ah	3.0	3.0 Ah 4.0 Ah 5.2 Ah 6.0 Ah		60Ah	8.0 Ah			

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	49 min	65 min	81 min	98 min	130 min	169 min	195 min	260 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge in idle mode



# **CORDLESS OUTDOOR LIGHT**

# GC-OL 18/1500 Li

PXC battery voltage	18 V
Luminosity	309 / 825 / 1500 lm
Colour temperature	7000 K
Number of LEDs	36
Product weight	0.5 kg
Article only available without battery	Article number 2320120 4 006825 680423
/ charger	2320120 4 006825 680423

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2)</b>	2.4 h	3.2 h	4 h	4.8 h	6.4 h	8.3 h	9.6 h	12.8 h
<b>3</b> )	7.2 h	9.6 h	12 h	14.4 h	19.2 h	25 h	28.8 h	38.4 h

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Luminous period per battery charge at max. brightness setting
 <sup>3)</sup> Luminous period per battery charge at min. brightness setting



# **NEW**

- >> Fan head rotation angle: +/- 60°
- >> Telescopic stand >> Timer 1-8 h
- >> Tiltable fan head



- Fan head rotation angle: 0°-360°
   Carry handle
   Several fastening options



# **CORDLESS FAN**

### GE-CF 18/320 P Li

PXC battery voltage	18 V				
Idle speed	330 / 460 / 760 /910 min <sup>-1</sup>				
Wind speed	15000 m/h				
Fan diameter	320 mm				
Product weight	3.4 kg				
Article only available without battery / charger	Article number 3408071 4 006825"679298				

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	14,0 h	15.8 h	22.4 h	27.2 h	36.6 h	43.6 h	54.3 h	73.0 h
<b>3</b> )	4.4 h	5.4 h	7.0 h	8.3 h	11.0 h	13.7 h	16.5 h	22.0 h

Battery capacity
 Max. operating time per battery charge at min. speed
 Max. operating time per battery charge at max. speed

# **CORDLESS FAN** GE-CF 18/2200 Li

PXC battery voltage	18 V				
Idle speed	1200 / 1700 / 2200 min <sup>-1</sup>				
Wind speed	15000 m/h				
Fan diameter	180 mm				
Product weight	1.2 kg				
Article only available without battery	Article number	4 006825 665253			
/ charger	3408035 4 006825 66525				

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	5.3 h	7 h	8.8 h	10.6 h	14 h	18.3 h	21.2 h	28 h
<b>3</b> )	2 h	2.6 h	3.3 h	4 h	5.3 h	7 h	8 h	10.6 h

<sup>)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge at min. speed <sup>3)</sup> Max. operating time per battery charge at max. speed

# **NEW**

- Fan head can be rotated (290°) and tilted (300°)
   Carry handle
   Fastening clamp





# **CORDLESS FAN**

### GC-CF 18/110 Li

PXC battery voltage	18 V				
Idle speed	1700 / 2500 / 3400 min <sup>-1</sup>				
Wind speed	15000 m/h				
Fan diameter	110 mm				
Product weight	0.5 kg				
Article only available without battery / charger	Article number 3408061	4 006825 677645			

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	19.5 h	26 h	32 h	38.5 h	51 h	67 h	77 h	102 h
<b>3</b> )	4 h	5.3 h	6.6 h	8 h	11 h	14 h	16 h	21.2 h

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge at min. speed
 <sup>3)</sup> Max. operating time per battery charge at max. speed





- Padded carrying strap
   Large buckle for easy opening and closing
   Cable hook
- >>> Second battery pocket removable



# **BATTERY BELT**

### GE-PB 36/18 Li

PXC battery voltage	Suitable for 18 V appliances and 36 V (2x 18 V) appliances				
Number of battery pockets	2 pcs				
Cable length	150 cm				
Length of hip belt	150 cm				
Product weight	1.7 kg				
Article only available without batter- ies / chargers	Article number 3408310	4 006825 659580			



- >> Housing made of stainless steel
- Housing made of stainless steel
   Heating jacket made of galvanized steel sheet
   Piezo ignition
   On/Off switch for fan
   Backfire guard + piezo-electric flame guard
   Solenoid valve + gas valve button
   Only for use in Germany and Austria

# GAS HOT AIR GENERATOR WITH **RECHARGEABLE BATTERY**

### GE-HG 18/370 Niro Li

PXC battery voltage					18 V				
, 0					37 kW				
Hot air	flow				100	10 m³/h			
Max. ga	as consui	mption			269	13 g/h			
Max. o	perating	pressure			1.5	bar			
Gas bo	ttle				5 kg	g - 11 kg j	propane	-butane	
Gas type				Propane, butane or propane-bu-					
Gas typ	Je				tane-mixtures				
Produc	t weight				4.7 kg				
Access	ories				Pressure regulator 1500 mbar + gas				r + gas
					hos				
		lable with	hout batt	ery		cle numb	ber	4 006825	
/ charger			233	0805		4 "006825"	641851"		
<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah

**2** 90 min 140 min 160 min 180 min 280 min 330 min 380 min 560 min

Battery capacity
 Max. operating time per battery charge



- >> Wall mount incl. dowels and screws
- ➤ Garden hose (30 m)
- Garden sprayer (cone and fan jet)
   Carrying handle and recessed grips
- >>> Drip stop
- >> Patented hose guide system
- >>> Cleaning brushes on the feeder
- ➤ Maintenance flap
- >> Residual water drain



- Wall mount incl. dowels and screws
   Carrying handle and recessed grips
- >> Drip stop
- >> Patented hose guide system
- >>> Stepless hose extraction
- >>> Cleaning brushes on the feeder
- ➤ Maintenance flap
- >> Residual water drain

# **CORDLESS HOSE REEL (WATER)**

### GE-HR 18/30-1 Li

PXC battery voltage	18 V	
Garden hose length	30 m	
Garden hose diameter	12.5 mm (1/2")	
Connecting hose length	1.5 m	
Connecting hose diameter	12.5 mm (1/2")	
Swivelling range	180°	
Product weight	12.1 kg	
Article only available without battery / charger	Article number 4173773	4 006825 682786

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>xxx</b> <sup>2)</sup>	25x	33x	42x	50x	66x	86x	100x	132x
3)	17x	22x	28x	34x	44x	57x	68x	88x

Battery capacity

Max. number of roll-on and roll-off cycles per battery charge with water-filled hose (30 m, 1/2")
 Max. number of roll-on and roll-off cycles per battery charge with empty hose (30 m, 1/2")

# **CORDLESS HOSE REEL (WATER)**

### GE-HR 18/30-1 WH Li

PXC battery voltage	18 V				
Garden hose length	[30 m]*				
Garden hose diameter	[12.5 mm (1/2")]*				
Connecting hose length	1.5 m				
Connecting hose diameter	12.5 mm (1/2")				
Swivelling range	180°				
Product weight	8.5 kg				
Article only available without battery / charger	Article number 4173774 4 006825 682793				

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	25x	33x	42x	50x	66x	86x	100x	132x
<b>3</b> )	17x	22x	28x	34x	44x	57x	68x	88x

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. number of roll-on and roll-off cycles per battery charge with water-filled hose (30 m, 1/2")

<sup>3)</sup> Max. number of roll-on and roll-off cycles per battery charge with empty hose (30 m, 1/2")

\* Garden hose not included in scope of delivery



### **Hose and Transport Trolley**

Max. load	50 kg
Support surface	28 x 34 cm
Wheel diameter	170 mm
Garden waste bag volume	75 I
Product weight	4.8 kg
Article number	4173772
EAN	4 "006825" 674231"



# **CORDLESS AUTOMATIC GARDEN PUMP**

# **AQUINNA 36/38 F LED AUTOMATIC**

PXC battery voltage	2x 18 V	
Max. delivery capacity / height	3800 l/h / 37 m	
Max. suction height	6 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") IT	
Product weight	4.8 kg	
Article only available without batter- ies / chargers	Article number 4180420	4 006825 668391

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	12 min	16 min	20 min	24 min	32 min	42 min	48 min	64 min
<b>3</b> )	24 min	32 min	40 min	48 min	64 min	84 min	96 min	128 min

Battery capacity (2x batteries required)
 Max. operating time in BOOST mode per battery charge
 Max. operating time in ECO mode per battery charge

- ➤ Water filler screw
- >> Water drain screw
- >> Power level switch: ECO and BOOST mode
- >>> Battery capacity indicator LED
- >> Pre-filter
- >> Non-return valve
- Water filling / dirt indicator
   Suction indicator
   Automatic mode
- >>> Dry running protection



### >> Water filler screw

- >> Water drain screw
- >> Power level switch: ECO and BOOST mode
- >> Battery capacity indicator LED
- >> Pre-filter
- >> Non-return valve
- Water filling / dirt indicator
- >> Suction indicator
- >> Automatic mode
- >>> Dry running protection

# CORDLESS AUTOMATIC GARDEN PUMP

# **AQUINNA 18/30 F LED AUTOMATIC**

PXC battery voltage	18 V (+ 18 V)	
Max. delivery capacity / height	3000 l/h / 28 m	
Max. suction height	6 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") IT	
Product weight	4.3 kg	
Article only available without battery / charger	Article number 4180460	4 006825 681512

[	<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	2)	10 min	15 min	17 min	20 min	30 min	36 min	40 min	60 min
	3)	14 min	19 min	23 min	28 min	38 min	48 min	56 min	76 min
	<b>4</b> )	20 min	30 min	34 min	40 min	60 min	72 min	80 min	120 min
	<b>5</b> )	28 min	38 min	46 min	56 min	76 min	96 min	112 min	152 min

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. operating time in BOOST mode with 1x 18 V battery per battery charge
 <sup>3)</sup> Max. operating time in ECO mode with 1x 18 V battery per battery charge
 <sup>4)</sup> Max. operating time in BOOST mode with 2x 18 V batteries per battery charge
 <sup>5)</sup> Max. operating time in ECO mode with 2x 18 V batteries per battery charge





- Water filler screw
   Water drain screw
   Power level switch: ECO and BOOST mode
   Battery capacity indicator LED
- >> Pre-filter
- Non-return valve
   Water filling / dirt indicator

# **CORDLESS GARDEN PUMP**

### AQUINNA 36/38 F LED

PXC battery voltage	2x 18 V	
Max. delivery capacity / height	3800 l/h / 37 m	
Max. suction height	6 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") IT	
Product weight	4.3 kg	
Article only available without batter- ies / chargers	Article number 4180410	4 006825 668384

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	12 min	16 min	20 min	24 min	32 min	42 min	48 min	64 min
3)	24 min	32 min	40 min	48 min	64 min	84 min	96 min	128 min

<sup>1)</sup> Battery capacity (2x batteries required)
 <sup>2)</sup> Max, operating time in BOOST mode per battery charge
 <sup>3)</sup> Max, operating time in ECO mode per battery charge



- ➤ Water filler screw
- Water filer screw
   Water drain screw
   Power level switch: ECO and BOOST mode
   Water filling indicator

# **CORDLESS GARDEN PUMP**

### **AQUINNA 36/34**

2x 18 V	
3400 l/h / 37 m	
6 m	
33.3 mm (1") ET	
33.3 mm (1") IT	
3.8 kg	
Article number 4180450	4 006825 673975
	3400 l/h / 37 m 6 m 33.3 mm (1") ET 33.3 mm (1") IT 3.8 kg Article number

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	12 min	16 min	20 min	24 min	32 min	42 min	48 min	64 min
 3)	24 min	32 min	40 min	48 min	64 min	84 min	96 min	128 min

Battery capacity (2x batteries required)
 Max. operating time in BOOST mode per battery charge
 Max. operating time in ECO mode per battery charge





➤ Water filler screw

- >> Water drain screw
- >> Power level switch: ECO and BOOST mode

# **CORDLESS GARDEN PUMP**

# **AQUINNA 36/30**

PXC battery voltage	2x 18 V				
Max. delivery capacity / height	3000 l/h / 26 m				
Max. suction height	8 m				
Suction connection	42 mm (1¼") ET				
Pressure connection	33.3 mm (1") IT				
Product weight	3.3 kg				
Accessories	Adapter 33.3 mm	ו (1") ET			
Article only available without batter- ies / chargers	Article number 4180400	4 006825 638981			

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	12 min	15 min	23 min	30 min	35 min	45 min	50 min	70 min
3)	30 min	35 min	47 min	55 min	70 min	85 min	100 min	140 min

Battery capacity (2x batteries required)
 Max. operating time in BOOST mode per battery charge
 Max. operating time in ECO mode per battery charge



>> Water drain screw

- > Power level switch: ECO and BOOST mode
- >> Suction hose included

# **CORDLESS GARDEN PUMP**

# AQUINNA 36/30 Set

PXC battery voltage	2x 18 V			
Max. delivery capacity / height	3000 l/h / 26 m			
Max. suction height	8 m			
Suction connection	42 mm (1¼") ET			
Pressure connection	33.3 mm (1") IT			
Product weight	3.3 kg			
Accessories	Suction hose (4 m)			
Article available without batteries / chargers, with suction hose (4 m)	Article number 4180401 4 006825 679762			

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	12 min	15 min	23 min	30 min	35 min	45 min	50 min	70 min
3)	30 min	35 min	47 min	55 min	70 min	85 min	100 min	140 min

Battery capacity (2x batteries required)
 Max. operating time in BOOST mode per battery charge
 Max. operating time in ECO mode per battery charge







>> Water filler screw

- >> Water drain screw
- >> Power level switch: ECO and BOOST mode ➤ Battery capacity indicator LED
- >> Pre-filter
- >> Non-return valve
- ➤ Water filling / dirt indicator

# **CORDLESS GARDEN PUMP**

### AQUINNA 18/30 F LED

PXC battery voltage	18 V (+ 18 V)	
Max. delivery capacity / height	3000 l/h / 28 m	
Max. suction height	6 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") IT	
Product weight	3.9 kg	
Article only available without battery / charger	Article number 4180430	4 006825 668513

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	10 min	15 min	17 min	20 min	30 min	36 min	40 min	60 min
<b>3</b> )	14 min	19 min	23 min	28 min	38 min	48 min	56 min	76 min
<b>4</b> )	20 min	30 min	34 min	40 min	60 min	72 min	80 min	120 min
<b>5</b> )	28 min	38 min	46 min	56 min	76 min	96 min	112 min	152 min

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. operating time in BOOST mode with 1x 18 V battery per battery charge
 <sup>3)</sup> Max. operating time in ECO mode with 1x 18 V battery per battery charge
 <sup>4)</sup> Max. operating time in BOOST mode with 2x 18 V batteries per battery charge
 <sup>5)</sup> Max. operating time in ECO mode with 2x 18 V batteries per battery charge



➤ Water filler screw

- Water drain screw
   Power level switch: ECO and BOOST mode

# **CORDLESS GARDEN PUMP**

### **AQUINNA 18/28**

PXC battery voltage	18 V					
Max. delivery capacity / height	2800 l/h / 25 m					
Max. suction height	6 m					
Suction connection	33.3 mm (1") ET					
Pressure connection	33.3 mm (1") IT					
Product weight	2.4 kg					
Article only available without battery / charger	Article number 4180440 4 006825 668711					

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	10 min	14 min	17 min	20 min	28 min	36 min	40 min	56 min
<b>3</b> )	14 min	18 min	22 min	27 min	36 min	47 min	54 min	72 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time in BOOST mode per battery charge <sup>3)</sup> Max. operating time in ECO mode per battery charge

### **Surface Pumps Accessories**

Suction Hose (7 m) with Brass Con- nectors	Article number 4173640	4 006825 549171
Suction Hose (4 m) with Brass Con- nectors	Article number 4173630	4 006825 549133
Suction Hose (7 m) with Plastic Connectors	Article number 4173645	4 006825 549102
Suction Hose (4 m) with Plastic Connectors	Article number 4173635	4 006825 549058
Coarse Filter 25 cm	Article number 4173851	4 006825 549195
Coarse Filter 12 cm	Article number 4173801	4 006825 549188
Adapter 33.3 mm (1") ET	Article number 4173761	4 006825 662733



- >> Mobile battery box

- Noble battery box
   Integrated cable rewind
   Integrated wall mount
   Suspension device made from stainless steel
   Telescopic extension tube
   Clautible accessed
- >>> Flexible gooseneck



- Mobile battery box
   Dry running protection
   Integrated cable rewind
- >> Integrated wall mount
- >> Suspension device made from stainless steel
- >> Low level suction down to 1 mm



>> Mobile battery box

- Dry running protection
   Integrated cable rewind
- Integrated wall mount

>> Suspension device made from stainless steel

# **CORDLESS SUBMERSIBLE PRESSURE/RAIN-**WATER BARREL PUMP

# GE-PP 18 RB Li

PXC battery voltage						V				
Max. delivery capacity / height					3000 l/h / 20 m					
Max. immersion depth					4 m	ı				
Hose connection					33.	3 mm (1"	) ET			
Connection cable					5 m					
Produc sories	Product weight excl. / incl. acces- sories				2.5 / 2.8 kg					
	Article only available without battery / charger					icle numl '0429	ber		4 006825	651270
1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0	) Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah

25 min

35 min

30 min

45 min

60 min

2) 12 min

Battery capacity
 Max. operating time per battery charge when pumping water

15 min

# CORDLESS CLEAR WATER PUMP

20 min

# GE-SP 18 LL Li

PXC battery voltage					18	V					
Max. delivery capacity / height					4500 l/h / 8 m						
Max. immersion depth				4 m							
Suction down to					1 m	ım					
Hose connection					33.3 mm (1") ET						
Connec	Connection cable					5 m					
Produc	t weight				2.2 kg						
	Article only available without battery / charger					cle numb 1560	ber		4 006825	661415	
<b>() ()</b> ()	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah	

<b>()))</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2)</b>	20 min	25 min	30 min	40 min	60 min	70 min	80 min	120 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge when pumping water

Pool Cover Pump Plate	4181563

# **CORDLESS CLEAR WATER PUMP**

# GE-SP 18 Li

PXC battery voltage	18 V
Max. delivery capacity / height	5000 l/h / 8 m
Max. immersion depth	4 m
Suction down to	15 mm
Hose connection	33.3 mm (1") ET
Connection cable	5 m
Product weight	2.6 kg
Article only available without battery / charger	Article number 4181500 4 006825 651379

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	20 min	30 min	35 min	40 min	60 min	70 min	80 min	120 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge when pumping water





- Mobile battery box
   Dry running protection
   Integrated cable rewind
   Integrated wall mount
   Suspension device made from stainless steel
   Power level switch: ECO and BOOST mode

# **CORDLESS DIRTY WATER PUMP**

# GE-DP 18/25 Li

PXC battery voltage	18 V
Max. delivery capacity / height	7500 l/h / 5 m
Max. immersion depth	4 m
Suction down to	35 mm
Max. size of foreign particle	25 mm
Hose connection	42 mm (1¼") ET
Connection cable	5 m
Product weight	3.3 kg
Universal hose adapter	•
Article only available without battery / charger	Article number 4181580 4 006825 665642

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2)</b>	11 min	15 min	19 min	23 min	30 min	40 min	46 min	60 min
<b>3</b> )	16 min	21 min	26 min	32 min	42 min	55 min	64 min	84 min

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. operating time per battery charge when pumping water in BOOST mode
 <sup>3)</sup> Max. operating time per battery charge when pumping water in ECO mode



- >> Mobile battery box

- Mobile battery box
   Dry running protection
   Integrated cable rewind
   Integrated wall mount
   Suspension device made from stainless steel
   Low level suction down to 1 mm
   Desurt base level suction
- >> Power level switch: ECO and BOOST mode
- >> Suction level control

# **CORDLESS DIRTY WATER PUMP**

### GE-DP 18/25 LL Li

PXC battery voltage	18 V
Max. delivery capacity / height	7000 l/h / 5 m
Max. immersion depth	4 m
Suction down to	1 mm
Max. size of foreign particle	25 mm
Hose connection	42 mm (1¼") ET
Connection cable	5 m
Product weight	3.4 kg
Universal hose adapter	•
Article only available without battery / charger	Article number 4181590 4 006825 668780

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	11 min	15 min	19 min	23 min	30 min	40 min	46 min	60 min
<b>3</b> )	16 min	21 min	26 min	32 min	42 min	55 min	64 min	84 min

<sup>1)</sup> Battery capacity

Max. operating time per battery charge when pumping water in BOOST mode
 Max. operating time per battery charge when pumping water in ECO mode







 Locking System for connecting stacked cases
 2x fold-in ergonomic handles for comfortable carrying



### Set of Plastic Compartments

Suitable for	E-Case S-F
Items supplied	2x long, 3x medium, 4x short dividers
Article number	4540012
EAN	4 006825 654004

# SYSTEM CASES E-CASE

### E-Case S-F

Items supplied	1x System Case + 1x Foam Insert f			
	devices			
Internal dimensions	415 x 280 x 95 mm			
External dimensions	444 x 330 x 131 mm			
Load capacity	90 kg			
Product weight	1.7 kg			
Article number	4540011	4 006825 653991		

### **Grid Foam**

Suitable for	E-Case S-F
Items supplied	1x adjustable grid foam inlay
Article number	4540013
EAN	4 006825 656749




# SYSTEM CASES E-CASE E-Case M

Items supplied	1x E-Case M + 1x hand tool insert		
Internal dimensions	415 x 280 x 250 mm		
External dimensions	444 x 330 x 295 mm		
Load capacity	90 kg		
Product weight	2.9 kg		
Article number	4540021	4 006825 667721	

- Locking System for connecting stacked cases
   Inner height of 25 cm is optimized for bulky einhell products
   Foldable + ergonomic handle for comfortable carrying





SYSTEM CASES E-CASE

Items supplied	1x E-Case S + 1x foam insert for de- vices, 1x E-Case S + 1x set of plastic compartments, 1x E-Case L + 1x hand tool insert + 2x spacer clips		
Internal dimensions	415 x 280 x 95 mm (E-Case S), 415 x 273 x 320 mm (E-Case L)		
External dimensions (incl. telescopic handle)	444 x 368 x 700 mm		
Load capacity	120 kg		
Product weight	10.1 kg		
Plastic compartments	2x long, 3x medium, 4x short divider		
Article number	4540015 4 006825 660609		

>> Complete modular storage solution for the ambitious handyman

# E-CASE-SYSTEM





- Locking System for connecting stacked cases
   Large 15 cm all-terrain rubberized wheels
   For storing and transporting large tools

Locking System for connecting stacked cases
 Ergonomic side handles for carrying comfort
 On-top stacking possible

# SYSTEM CASES E-CASE

# E-Case L

Items supplied	1x E-Case L + 1x hand tool insert + 2x		
items supplied	spacer clips		
Internal dimensions	415 x 273 x 320 mm		
External dimensions (incl. telescopic handle)	444 x 406 x 355 mm		
Load capacity	120 kg		
Product weight	6.3 kg		
Article number	4540014	4 006825 660562	

# SYSTEM CASES E-CASE

### **E-Case Toolbox**

Items supplied	1x E-Case Toolbo	1x E-Case Toolbox		
External dimensions	444 x 320 x 210 ı	444 x 320 x 210 mm		
Internal dimensions	403 x 290 x 195 ı	403 x 290 x 195 mm		
Load capacity	90 kg	90 kg		
Product weight	1.7 kg	1.7 kg		
Article number	4540037	4 006825 677973		



Part of the modular E-Case system from Einhell
 Large outside pockets for storing, e.g. batteries and chargers
 Spirit level clips

# SYSTEM CASES E-CASE

# **E-Case Bag**

Items supplied	1x E-Case Bag		
External dimensions	440 x 220 x 330 mm		
Internal dimensions	430 x 210 x 290 mm		
Load capacity	30 kg		
Product weight	1.5 kg		
Article number	4540036	4 006825 677966	





- >> Locking system for connecting the roller board and case
- >> Additional locking mechanism for half size e-cases
- Additional focking international matrix for that size classes
   Lashing strap fastening for transporting larger objects
   Large support surface adapted for transporting drinks crates
   Integrated foot brakes

# **NEW**



- Locking System for connecting stacked cases
   Additional locking mechanism for half size e-cases
- >> Ergonomic carrying handle for transport
- >> 2 smaller and 1 larger drawer for flexible storage

>>> Lockable

# **NEW**



- Locking System for connecting stacked cases
   Connecting element between E-Case and Half Size Organiser

>> Can also be used as a wall mount

# SYSTEM CASES E-CASE

# E-Case Half Size Organizer

Items supplied	1x E-Case Half Size Organiser + 3x sorting boxes + 1x large box + 2x dividers	
Dimensions	300 x 262 x 78 mm	
Load capacity	12.5 kg	
Product weight	1.0 kg	
Sorting boxes	•	
Article number	4540048	4 006825 684803

# **NEW**



>> Part of the modular E-Case system from Einhell

- >> Additional half-size components can be stacked
- >> High-quality transparent lid

>> Ergonomic carrying handle for transport

# SYSTEM CASES E-CASE

### **E-Case Rolling Base**

Items supplied	1x E-Case Rolling	Base
Dimensions	403 x 290 mm	
Load capacity	120 kg	
Product weight	3.6 kg	
Article number	4540041	4 006825 679335

# SYSTEM CASES E-CASE

### **E-Case Drawer**

Items supplied	1x E-Case with 3 of	drawers + 12x sorting
	boxes + set of pla	stic compartments
External dimensions	444 x 322 x 340 mm	
Load capacity	60 kg	
Product weight	7.4 kg	
Plastic Compartments	•	
Sorting boxes	•	
Article number	4540047	4 006825 684797

# SYSTEM CASES E-CASE

### **E-Case Adapter Plate**

Items supplied	1x E-Case Adapter Plate	
Total payload when mounted on the E-Case or floor	90 kg	
Total payload when mounted on the wall	25 kg	
Product weight	0.8 kg	
Article number	4540043	4 006825 683530

# **E-CASE-SYSTEM**



# **NEW**



Part of the modular E-Case system from Einhell
 Large area for working
 Storage compartments for screws, wall plugs, screwdrivers, etc.

# SYSTEM CASES E-CASE

### E-Case Worktable

Items supplied	1x E-Case Worktable	
Dimensions	500 x 360 x 42 mm	
Product weight	1.7 kg	
Article number	4540049	4 006825 685121

# **ACCESSORIES – CASES + BAGS**

### E-Box L70



Items supplied	1 universal case
Internal dimensions	670 x 190 x 300 mm
External dimensions	700 x 250 x 350 mm
Load capacity	50 kg
Product weight	4.1 kg
Article number	4530054
EAN	4 006825"636901"



Einhell	Bag	56	/29

-	
Items supplied	1 universal bag
Internal dimensions	520 x 290 x 250 mm
External dimensions	520 x 290 x 300 mm
Load capacity	25 kg
Product weight	1.7 kg
Article number	4530078
EAN	4 006825 672527

### E-Box M55

E-Box S35



Items supplied	1 universal case
Internal dimensions	510 x 327 x 124 mm
External dimensions	550 x 400 x 150 mm
Load capacity	30 kg
Product weight	3.0 kg
Article number	4530049
EAN	4 006825 631739



Items supplied	1 universal case
Internal dimensions	310 x 250 x 89.5 mm
External dimensions	350 x 330 x 110 mm
Load capacity	12 kg
Product weight	1.6 kg
Article number	4530045
EAN	4 006825 629750



### Einhell Bag 45/29

Items supplied	1 universal bag
Internal dimensions	420 x 270 x 200 mm
External dimensions	450 x 290 x 220 mm
Load capacity	20 kg
Product weight	1.2 kg
Article number	4530074
EAN	4 006825 663310

### Einhell Bag 45/22

Items supplied	1 universal bag
Internal dimensions	390 x 200 x 190 mm
External dimensions	450 x 220 x 350 mm
Load capacity	15 kg
Product weight	0.9 kg
Article number	4530037
EAN	4 006825 636345







# **ACCESSORIES – BATTERIES**

### 4.0 Ah SEALED Power X-Change Plus Battery



Items supplied	1 battery
PXC battery voltage	18 V / 4.0 Ah
Battery power	max. 900 W
Product weight	0.58 kg
Article number	4511627
EAN	4 006825 673227

### 3.0 Ah SEALED Power X-Change Plus Battery



Items supplied	1 battery
PXC battery voltage	18 V / 3.0 Ah
Battery power	max. 900 W
Product weight	0.57 kg
Article number	4511618
EAN	4 006825 672794



SEALED TECHNOLOGY. NO CHANCE FOR DUST AND WATER.

Officially tested to IP57 protection class.\*

# WHAT DOES IP57 MEAN?

P

DUST 5

Protected from all types of foreign bodies and dust – be it wood, brick or metal.



\* Protection according to IP57 applies to the battery itself. It does not apply to tools operated with the battery.

**7** WATER

Protected from high pressure water spray and temporary submersion – to a maximum depth of 1 m for up to 30 minutes.



In addition to the sealed housing there is a sensor controlled safety cut out to prevent short circuiting under water. After the contacts have been dried, the battery is ready for use again.







# **PLUS TECHNOLOGY**

By switching to the new "21700" cell format (21 mm diameter, 70.0 mm length) our latest Power X-Change batteries have acquired the best combination of power/running time and weight.

Why? Using this cell technology it is possible to achieve the same power and running time with five cells instead of the previous ten.

Benefits? The new batteries are 12 % lighter and 13 % more compact than their predecessors – at 100 % power and running time.

Results: Light-weight all-rounders energy-intensive applications such as in cordless chainsaws.





# **MULTI-AH TECHNOLOGY**

Thanks to MULTI-Ah technology, switching over from a 5.0 Ah battery to a 8.0 Ah battery is really easy and can be done with just the push of a button.

The 5.0 Ah battery has a 3x longer total service life and is suitable for lighter applications (e.g. cordless lamps or cordless screwdrivers). The 8.0 Ah battery offers the maximum running time for more capacity-intensive applications (e.g. cordless lawn mower or cordless wet and dry vacuum cleaners).



In comparison to every standard lithium-ion battery
 In comparison to the 5.0 Ah battery



# **ONE BATTERY FOR ALL DEVICES – TWIN-PACK TECHNOLOGY**

Every Power X-Change battery from Einhell has a voltage of 18 V. If more power is required for more powerful tools, **two 18 V batteries are simply combined in one 36 V device** thanks to Twin-Pack technology. Doubling the voltage automatically doubles the power.

Double Twin-Pack technology allows you to work even longer without recharging. This uses four batteries. If the first two batteries are empty, the system automatically switches to the two additional batteries.



....

# **ACCESSORIES – BATTERIES**

### One battery for all devices

Our rechargeable batteries are not only available individually (solo item), but also in a Twin Pack. To get started in the Einhell world, we recommend choosing a Starter Kit (battery + charger)



	Less weight and size		PXC Ba	PXC Batteries		nd runtime
		<b>()</b>	NEW		<b>(</b>	
	4.0 Ah	4.0 Ah PLUS	4.0 Ah SEALED	5.2 Ah	4-6 Multi-Ah	5-8 Multi-Ah
Solo (1 battery)	4511396	4511553	4511627	4511437	4511502	4511600
EAN	4 006825 610376	4 006825 660869	4 006825 673227	4 006825 616606	4 006825 644210	4 006825 665055 <sup>1</sup>
Power	max. 900 W	max. 900 W	max. 900 W	max. 1260 W	max. 1350 W	max. 1350 W
Weight	670 g	595 g	605 g	890 g	1020 g	1050 g
Features						
PLUS – Extra Power		$\checkmark$	$\checkmark$	$\checkmark$	$\checkmark$	$\checkmark$
SEALED			$\checkmark$			
Multi-Ah					$\checkmark$	$\checkmark$

	<b>E</b>			
	3.0 Ah PLUS	4.0 Ah	4.0 Ah PLUS	5.2 Ah
Twin-Pack (2 batteries)	4511631	4511489	4511629	4511526
EAN	4 006825 673692	4 006825 638578	4 006825 673685	4 006825 656695





# **ACCESSORIES – STARTER KITS**

Getting started is easy - with the Einhell Power X-Change Starter Kit

Technical data and features at a glance:

	2.5 Ah	4.0 Ah	4.0 Ah PLUS	5.2 Ah	4-6 Multi-Ah
Article number (1 battery + 1 charger)	4512097	4512042	4512159	4512114	4512143
EAN	4 006825 646962	4 006825 613704		4 006825 656787	4 006825 667653
Article number (2 batteries + 1 Twincharger)	-	4512112	-	-	-
EAN	-	4 006825 655766	-	-	-
<b>Charger</b> (More information in the charger table)	3 A Charger	3 A Charger / 3 A Twincharger	3 A Charger	3 A Charger	6 A Boostcharger
Ready to go	50 min	75 min	75 min	80 min	60 min

# **ACCESSORIES – CHARGERS**

One charger for all batteries - 100% compatibility

	A CONTRACTOR			1 Starte	
	3 A Charger	3 A Carcharger	4 A Fastcharger	6 A Boostcharger	8 A Boostcharger
Article number	Only available in Starter Kits	4512113	4512103	Only available in Starter Kits	4512155
EAN	-	4 006825 655377	4 006825 650228	-	4 006825 670554
Charging current	3 A	3 A	4 A	6 A	8 A
Number of ports for PXC batteries	1	1	1	1	1

		NEW	
	3 A Twincharger	4 A Twincharger	4 A Quattrocharger
Article number	4512069	4512161	4512102
EAN	4 006825 629729		4 006825 649536
Charging current	3 A (per port)	4 A (per port)	4 A (per port) (parallel charging of 2x2 batteries)
Number of ports for PXC batteries	2	2	4







Endless extendable
 Tongue and groove connection

>> Snap-in function for secure fastening



>> Protects the battery against dust and moisture

# **PXC ACCESSORIES**

# **Battery Mounting Gadget**

Items supplied	2 battery mounting gadgets, 4 screws, 4 dowels		
Suitable for (batteries)	all 18 V Power X-Change batteries		
Special feature	The batteries latch in place and are secure in every position		
Article number	4514155 4 006825 658774		

# **PXC ACCESSORIES**

**Battery Protector** 

Items supplied	1 battery cover				
Suitable for (batteries)	all 18 V Power X-Change batteries				
Can be used for (devices)	HYPRESSO 18/24, TE-DA 18/760 Li, GE-WS 18/10 Li				
Special feature	Protects the battery against dust and moisture				
Article number	4140151	4 006825 670844			

# **BATTERY CHARGING TIME TABLE**

	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah	
Power X-Charger 3 A									Shorter charging
<b>Power X-Twincharger 3 A</b> (parallel charging of 2 batteries)	30 min	40 min	50 min	60 min	75 min	100 min	120 min	160 min	time
Power X-Car Charger 3 A									200
Power X-Fastcharger 4 A									-25%
<b>Power X-Twincharger 4 A</b> (parallel charging of 2 batteries)	24 min	30 min	37 min	45 min	60 min	80 min	90 min	120 min -	
<b>2x2 Power X-Quattrocharger 4 A</b> (parallel charging of 2 batteries)									
Power X-Boostcharger 6 A *	24 min	30 min	27 min	32 min	40 min	50 min	60 min	80 min 🚽	-50%
Power X-Boostcharger 8 A **	24 min	30 min	27 min	32 min	40 min	40 min	45 min	60 min 🚽	-60%

\* Only 2.5 Ah - 8.0 Ah batteries can be charged with 6 A. Batteries of lower capacity are charged with a lower current.
\*\* Only 5.2 Ah - 8.0 Ah batteries can be charged with 8 A. Batteries of lower capacity are charged with a lower current.

- Finhell

CORDLESS EXCELLENCE



# EINHELL IS OFFICIAL HOME & GARDEN EXPERT OF FC BAYERN!





Official Home & Garden Expert

F.





# HAND LAWN MOWER

### GE-HM 38 S-F

Cutting width	38 cm			
Cutting height adjustment	4 levels / 13 - 38 mm			
Grass box capacity	26			
Number of mowing blades	5			
Mowing spindle diameter	125 mm			
Wheel diameter	220 mm			
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	250 m²			
Product weight	8.4 kg			
Article number	3414161 4 006825 607765			
Grass catch box	3421112 4 006825 609707			



# HAND LAWN MOWER

### GE-HM 38 S

Grass catch box	3421112	4 006825 609707		
Article number	3414165	4 006825 609714		
Product weight	7.8 kg			
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	250 m²			
Wheel diameter	220 mm			
Mowing spindle diameter	125 mm			
Number of mowing blades	5			
Cutting height adjustment	4 levels / 13 - 38	mm		
Cutting width	38 cm			





# HAND LAWN MOWER

### GC-HM 400

Cutting width	40 cm	
Cutting height adjustment	4 levels / 13 - 37 mm	
Grass box capacity	27	
Number of mowing blades	5	
Mowing spindle diameter	125 mm	
Wheel diameter	215 mm	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	250 m <sup>2</sup>	
Product weight	7.5 kg	
Article number	3414129 4 006825 651959	





# HAND LAWN MOWER

# GC-HM 300

Cutting width	30 cm
Cutting height adjustment	4 levels / 13 - 37 mm
Grass box capacity	16
Number of mowing blades	5
Mowing spindle diameter	125 mm
Wheel diameter	215 mm
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	150 m²
Product weight	6.5 kg
Article number	3414114 4 006825 651942





# **ELECTRIC LAWN MOWER**

# GC-EM 1800/43

Mains connection / rated input	230 - 240 V ~ 50 Hz / 1800 W	
Cutting width	43 cm	
Cutting height adjustment	6 levels / 20 - 65 mm / central	
Grass box capacity	50	
Wheel diameter front / rear	150 mm / 220 mm	
Housing material	Plastic	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	800 m <sup>2</sup>	
Product weight	12.1 kg	
Article number	3400090	4 006825 670356
Spare blade	3405445	4 006825 670455

# Highwheels Integrated carry handle Cable-relief clip Height-adjustable handlebar Folding handlebar Quick clamping function Grass box with level indicator Wide wheels exert less stress on the lawn

# **ELECTRIC LAWN MOWER**

### GC-EM 1600/37

Mains connection / rated input	230 - 240 V ~ 50 Hz / 1600 W	
Cutting width	37 cm	
Cutting height adjustment	5 levels / 20 - 60 mm / central	
Grass box capacity	381	
Wheel diameter front / rear	150 mm / 220 mm	
Housing material	Plastic	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	700 m <sup>2</sup>	
Product weight	10.7 kg	
Article number	3400080	4 006825 670363
Spare blade	3405435	4 006825 670448



Mains connection / rated input	220 - 240 V ~ 50 Hz / 1000 W		
Cutting width	32 cm		
Cutting height adjustment	3 levels / 30 - 70 mm / axial		
Grass box capacity	30		
Wheel diameter front / rear	140 mm / 140 mm		
Housing material	Plastic		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	300 m²		
Product weight	7.9 kg		
Article number	3400070	4 006825 670332	
Spare blade	3405415	4 006825 670431	

Integrated carry handleCable-relief clip

Wide wheels exert less stress on the lawn



# PETROL LAWN MOWER

### GC-PM 56/2 S HW

Engine / displacement	4-stroke engine / 173 cm <sup>3</sup>		
Power / working speed	2.8 kW / 2850 min <sup>-1</sup>		
Cutting width	56 cm		
Cutting height adjustment	6 levels / 25 - 70 mm / central		
Grass box capacity	801	80	
Wheel diameter front / rear	200 mm / 280 mm		
Housing material	Powder-coated sheet steel		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	2200 m <sup>2</sup>		
Product weight	38.3 kg		
Cleaning tool	•		
Article number	3404860	4 006825 646450	
Spare blade	3405830	4 006825 630480	



# PETROL LAWN MOWER

### GC-PM 46 S HW-E

Engine / displacement	4-stroke engine / 149 cm <sup>3</sup>			
Power / working speed	2.0 kW / 2900 min <sup>-1</sup>			
Cutting width	46 cm			
Cutting height adjustment	9 levels / 25 - 80	mm / central		
Grass box capacity	65 I	65 l		
Wheel diameter front / rear	204 mm / 280 mm			
Housing material	Powder-coated sheet steel			
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1400 m <sup>2</sup>			
Product weight	28.9 kg			
Article number	3407570	4 006825 663143		
Combination blade	3405670	4 006825 605280		



# PETROL LAWN MOWER

### GC-PM 51/3 S HW

Engine / displacement	4-stroke engine / 171 cm <sup>3</sup>	
Power / working speed	2.7 kW / 2900 min <sup>-1</sup>	
Cutting width	51 cm	
Cutting height adjustment	6 levels / 30 - 80	mm / central
Grass box capacity	701	
Wheel diameter front / rear	204 mm / 280 m	m
Housing material	Powder-coated sheet steel	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1800 m <sup>2</sup>	
Product weight	28.3 kg	
Article number	3404333	4 006825 655261
Spare blade	3405660	4 006825 605273
Combination blade	3405650	4 006825 605266



# PETROL LAWN MOWER

# GC-PM 46/5 S

Engine / displacement	4-stroke engine / 132 cm <sup>3</sup>		
Power / working speed	2.0 kW / 2900 min <sup>-1</sup>		
Cutting width	46 cm		
Cutting height adjustment	9 levels / 25 - 80	mm / central	
Grass box capacity	65		
Wheel diameter front / rear	178 mm / 204 mm		
Housing material	Powder-coated sheet steel		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1400 m <sup>2</sup>		
Product weight	26.0 kg		
Article number	3407550	4 006825 662047	
Combination blade	3405670	4 006825 605280	



# PETROL LAWN MOWER

# GC-PM 40/2 S

Engine / displacement	4-stroke engine / 132 cm <sup>3</sup>		
Power / working speed	2.0 kW / 2900 min <sup>-1</sup>		
Cutting width	40 cm		
Cutting height adjustment	7 levels / 25 - 75	mm / central	
Grass box capacity	45		
Wheel diameter front / rear	178 mm / 203 mm		
Housing material	Plastic		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1000 m <sup>2</sup>		
Product weight	19.9 kg		
Article number	3404823	4 006825 665260	
Spare blade	3405850	4 006825 638806	



# PETROL LAWN MOWER

# GC-PM 40/2

Engine / displacement	4-stroke engine / 132 cm <sup>3</sup>	
Power / working speed	2.0 kW / 2900 min <sup>-1</sup>	
Cutting width	40 cm	
Cutting height adjustment	3 levels / 25 - 60	mm / single
Grass box capacity	45	
Wheel diameter front / rear	152 mm / 152 mm	
Housing material	Plastic	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	800 m²	
Product weight	17.3 kg	
Article number	3404833	4 006825 665741
	~	~
Spare blade	3405850	4 006825 638806



- Integrated carry handle
   Height-adjustable handlebar +

- on the lawn
- ➤ Toolless roller change



# **ELECTRIC SCARIFIER/AERATOR**

### GE-SA 1640

Mains connection / rated input	230 V ~ 50 Hz / 1600 W	
Working width	400 mm	
Working depth adjustment	4 levels (central) + transport position	
Number of blades (ball bearing)	20 pcs	
Number of aerating claws (ball bearing)	30 pcs	
Wheel diameter front / rear	220 mm / 175 mi	m
Housing material	Plastic	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	800 m <sup>2</sup>	
Product weight	13.7 kg	
Catch bag	•	
Aerator roller and scarifier roller	•	
Article number	3420590	4 006825 595642
Spare aerator roller	3421135	4 006825 606331
Spare scarifier roller	3421130	4 006825 606324

# **ELECTRIC SCARIFIER/AERATOR**

### GE-SA 1435/1

Mains connection / rated input	220 V - E0 H7 / 1	400 W/
	230 V ~ 50 Hz / 1400 W	
Working width	350 mm	
Working depth adjustment	3 levels (central) + parking position	
Number of blades (ball bearing)	16 pcs	
Number of aerating claws (ball bearing)	24 pcs	
Wheel diameter front / rear	160 mm / 160 mm	
Housing material	Easy maintenance plastic housing	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	550 m <sup>2</sup>	
Product weight	10.2 kg	
Catch bag	•	
Aerator roller and scarifier roller	•	
Article number	3420690	4 006825 661422

Catch bag	3405960	4 006825 667523
Aerator Roller	3405961	4 006825 667516
Scarifier Roller	3405962	4 006825 667509



# **ELECTRIC SCARIFIER/AERATOR**

### GC-SA 1231/1

Mains connection / rated input	230 V ~ 50 Hz / 1200 W		
Working width	310 mm		
Working depth adjustment	3 levels (central)	+ parking position	
Number of blades (ball bearing)	8 double-knives		
Number of aerating claws (ball bearing)	45 pcs	45 pcs	
Wheel diameter front / rear	180 mm / 100 m	m	
Housing material	Plastic		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	300 m <sup>2</sup>		
Product weight	8.5 kg		
Catch bag	•		
Aerator roller and scarifier roller	•		
Article number	3420640	4 006825 628272	
Catch bag	3405577	4 006825 629699	
Aerator Roller	3405572	4 006825 629675	
Scarifier Roller	3405582	4 006825 629682	



# **ELECTRIC SCARIFIER**

# GC-ES 1231/1

Mains connection / rated input	230 V ~ 50 Hz / 1200 W	
Working width	310 mm	
Working depth adjustment	3 levels (central) + parking position	
Number of blades (ball bearing)	8 double-knives	
Wheel diameter front / rear	180 mm / 100 m	m
Housing material	Plastic	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	300 m <sup>2</sup>	
Product weight	8.0 kg	
Scarifier roller	•	
Article number	3420630	4 006825 628289
Catch bag	3405577	4 006825 629699
Aerator Roller	3405572	4 006825 629675
Scarifier Roller	3405582	4 006825 629682



# **PETROL SCARIFIER**

GC-SC 4240 P		
Engine / displacement	4-stroke engine /	212 cm <sup>3</sup>
Power rating	4.2 kW	
Working width	400 mm	
Working depth adjustment	8 levels (central)	+ transport position
Number of blades (ball bearing)	18 pcs	
Wheel diameter front / rear	180 mm / 180 mi	m
Housing material	Metal	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1200 m²	
Product weight	31.4 kg	
Catch bag	•	
Scarifier roller	•	
Article number	3420019	4 006825 638073
Spare scarifier roller	3420021	4 006825 603309



# **GARDEN ROLLER**

GC-GR 57

Working width	57 cm	
Roller diameter	32 cm	
Filling quantity	46 I	
Housing material	Coated metal	
Product weight	10.5 kg	
Article number	3415302	4 006825 627404



- Double push-bar
   Spreading volume adjuster
   Corrosion-resistant roller
   Spring lock device dismountable without tools

# **MULTI-PURPOSE SPREADER**

### **GC-SR 12**

Spread width	45 cm	
Capacity of grit box	121	
Wheel diameter	200 mm	
Product weight	2.5 kg	
Article number	3415238	4 006825 635065



- Additional handle
   Telescopic long handle
   Cable-relief clip
   Motor head rotatable 180°
   Motor head can be tilted to 4 settings
- Flower guard
   Fully automatic line feed



# **ELECTRIC LAWN TRIMMER**


### GC-ET 4530 Set

Mains connection / rated input	230 V ~ 50 Hz / 4	50 W	
Cutting width (thread)	300 mm		
Thread diameter / length	1.4 mm / 1000 cr	1.4 mm / 1000 cm	
Single / twin line cutting	Twin line cutting	Twin line cutting	
Housing material	Plastic	Plastic	
Product weight	2.6 kg		
Thread spool	• (3 pcs)		
Article number	3402022	4 006825 610505	
Spare line spool	3405685	4 006825 610680	



Mains connection / rated input	230 V ~ 50 Hz / 300 W		
Cutting width (thread)	230 mm		
Thread diameter / length	1.5 mm / 600 cm	1.5 mm / 600 cm	
Single / twin line cutting	Single line cutting	Single line cutting	
Housing material	Plastic	Plastic	
Product weight	1.5 kg		
Thread spool	•		
Article number	3402050	4 006825 598162	
Spare line spool	3405695	4 006825 599213	

Additional handle
 Cable-relief clip
 Automatic jog line feed





# >> Additional handle ➤ Cable-relief clip

➤ Automatic jog line feed

# **ELECTRIC LAWN TRIMMER**

# GC-ET 2522

Mains connection / rated input	230 - 240 V ~ 50 Hz / 250 W		
Cutting width (thread)	220 mm		
Thread diameter / length	1.2 mm / 600 cm	1.2 mm / 600 cm	
Single / twin line cutting	Twin line cutting	Twin line cutting	
Housing material	Plastic	Plastic	
Product weight	1.1 kg		
Thread spool	•		
Article number	3402040	4 006825 616699	
Spare line spool	3405075	4 006825 618723	

>> Shaped long handle made of aluminium

- Shaped long handle made of alun
   Split shaft
   Quick Start
   Autochoke
   Centrifugal clutch for cutting tool
- >> Automatic jog line feed

# **PETROL LAWN TRIMMER**

### GC-PT 2538/1 | AS

Engine / displacement	2-stroke engine	/ 25.4 cm <sup>3</sup>	
Power rating	0.6 kW	0.6 kW	
Cutting width (thread)	380 mm	380 mm	
Thread diameter / length	2 mm / 400 cm		
Single / twin line cutting	Twin line cutting		
Housing material	Plastic	Plastic	
Product weight	5.5 kg		
Article number	3401938	4 006825 643800	
Spare line spool	3405220	4 006825 558975	



- Extendable handle
   Long handle made of aluminium tube
   Split shaft
   Autochoke

- >> Digital ignition stable engine run

- Digital ignition stable engine run
   Automatic jog line feed
   Cutting unit (Hedge Trimmer) tiltable
   OREGON quality bar and chain
   Automatic chain lubrication
   Adjustable handle
   Protective cover
   Considerative the tith engineering

- >> Carrying belt with quick release





# PETROL MULTIFUNCTIONAL TOOL

### GC-MM 52 I AS

Engine / displacement	2-stroke engine /	′ 51.7 cm³	
Power rating	1.5 kW	1.5 kW	
Cutting width (double thread)	420 mm		
Thread diameter / length	2.4 mm / 400 cm		
Cutting width (blade)	255 mm		
Cutting length chainsaw	255 mm		
Chain cutting speed	21.3 m/s		
Blade length of hedge trimmer	395 mm		
Spacing between teeth (hedge trimmer)	31 mm		
Max. working height of elevated tools	3.5 m (pruner) / 3.5 m (hedge trimmer)		
Article number	3436555	4 006825 641684	
Spare chain 25cm 1,3 39T 3/8	4500364	4 006825 644616	
Spare bar 25cm 1,3	4500363	4 006825 644609	
Spare line spool	3405086	4 006825 546019	
Grass Blade 255	3404996	4 006825 607239	
Thicket Blade 255	3405082	4 006825 632774	



# PETROL SCYTHE

# GC-BC 36-4 S

Engine / displacement	4-stroke engine / 37.7 cm <sup>3</sup>	
Power rating	1.0 kW	
Cutting width (double thread)	420 mm	
Thread diameter / length	2.4 mm / 400 cm	
Cutting width (blade)	255 mm	
Housing material	Aluminium/plastics	
Product weight	7.9 kg	
Blade + thread spool	•	
Article number	3436560	4 006825 648751
Spare line spool	3405240	4 006825 598643

# **PETROL SCYTHE**

### GC-BC 52 I AS

Engine / displacement	2-stroke engine / 51.7 cm <sup>3</sup>	
Power rating	1.5 kW	
Cutting width (double thread)	420 mm	
Thread diameter / length	2.4 mm / 400 cm	
Cutting width (blade)	255 mm	
Housing material	Aluminium/plastics	
Product weight	8.5 kg	
Blade + thread spool	•	
Article number	3436540	4 "006825" 617337"
Spare line spool	3405086	4 006825 546019

# PETROL SCYTHE

### GH-BC 43 AS

Engine / displacement	2-stroke engine / 42.7 cm <sup>3</sup>	
Power rating	1.25 kW	
Cutting width (double thread)	420 mm	
Thread diameter / length	2.4 mm / 400 cm	
Cutting width (blade)	255 mm	
Housing material	Aluminium/plastics	
Product weight	8.9 kg	
Blade + thread spool	•	
Article number	3401973	4 006825 594768
Spare line spool	3405086	4 006825 546019





# **PETROL SCYTHE**

# GC-BC 30/1 I AS

Engine / displacement	2-stroke engine / 29.7 cm <sup>3</sup>	
Power rating	1.0 kW	
Cutting width (double thread)	420 mm	
Thread diameter / length	2.0 mm / 400 cm	
Cutting width (blade)	230 mm	
Housing material	Aluminium/plastics	
Product weight	7.6 kg	
Blade + thread spool	•	
Article number	3436525	4 006825 649086
Spare line spool	3405086	4 006825 546019

# **PETROL SCYTHE**

# GC-BC 25/1 | AS

Engine / displacement	2-stroke engine /	25.4 cm <sup>3</sup>
Power rating	0.75 kW	
Cutting width (double thread)	420 mm	
Thread diameter / length	2.0 mm / 400 cm	
Cutting width (blade)	230 mm	
Housing material	Aluminium/plastics	
Product weight	6.3 kg	
Blade + thread spool	•	
Article number	3401957	4 006825 643824
Spare line spool	3405086	4 006825 546019

- Splitshart
   Quick Start System + Autochoke
   Digital ignition stable engine run
   Automatic jog line feed
   Comfort harness



### Accessories (fit all Einhell scythes)

Туре	Article number	EAN	Suitable for
Mowing line Basic Line 1,3	3436650	4 006825 637861	-
Mowing line Basic Line 1,6	3436651	4 006825 637878	-
Mowing line Basic Line 2,0	3406652	4 006825 637885	-
Mowing line Super Cut Line 2,0	3436653	4 006825 637892	-
Mowing line Super Cut Line 2,4	3436654	4 006825 637915	-
Mowing line Super Cut Line 3,0	3436656	4 006825 637939	-
Mowing line Low Noise Line 2,4	3436655	4 006825 637922	-
Mowing line Low Noise Line 3,0	3436657	4 006825 637946	-
Special Grass Blade 230	3436660	4 006825 637953	grass and light vegetation
Thicket Blade 255	3405082	4 006825 632774	wild growth, scrup and thicket
Thicket Blade 200	3405083	4 006825 651454	wild growth, scrup and thicket
Grass Blade 255	3404996	4 006825 607239	tough grass and strong vegetation
Grass Blade 230	3436661	4 006825 637960	tough grass and strong vegetation

Side limiting discsSwivelling guide wheel >>> Quick Start Quick Start
 Cultivator blade stopped by dead man's circuit
 Ergonomic handlebar
 Height adjustable steady grips
 Height adjustable brake shoe

# **PETROL TILLER**

#### GC-MT 2560 LD

Engine / displacement	4-stroke engin	4-stroke engine / 150 cm <sup>3</sup>	
Power / working speed	2.5 kW / 3400 r	2.5 kW / 3400 min <sup>-1</sup>	
Working width	600 mm	600 mm	
Working depth	230 mm	230 mm	
Number of blades	6	6	
Cultivator blade diameter	260 mm	260 mm	
Fuel tank capacity	1.21	1.21	
Product weight	35.0 kg	35.0 kg	
Article number	3430281	4 006825 646351	

- Swivelling guide wheel
   Quick Start
   Cultivator blade stopped by dead man's circuit

- Ergonomic handlebar
   Height adjustable steady grips
   Height adjustable brake shoe



#### **PETROL TILLER**

#### GC-MT 2236

Engine / displacement	4-stroke engine /	140 cm <sup>3</sup>
Power / working speed	2.2 kW / 3200 min <sup>-1</sup>	
Working width	360 mm	
Working depth	220 mm	
Number of blades	4	
Cultivator blade diameter	260 mm	
Fuel tank capacity	2.01	
Product weight	28.8 kg	
Article number	3431501	4 006825 638066

#### ➤ Cable-relief clip

- >>> Overload protection



#### **ELECTRIC TILLER**

#### GC-RT 1545 M

Mains connection / rated input	230 - 240 V ~ 50 Hz / 1500 W	
Working width	450 mm	
Working depth	220 mm	
Number of blades	6	
Cultivator blade diameter	200 mm	
Product weight	10.4 kg	
Article number	3431060	4 006825 652598



Cable-relief clip
 Ergonomic handlebar
 Folding handlebar



**ELECTRIC TILLER** 

#### GC-RT 7530

Mains connection / rated input	230 V ~ 50 Hz /	750 W	
Working width	300 mm	300 mm	
Working depth	200 mm		
Number of blades	4		
Cultivator blade diameter	220 mm		
Product weight	7.4 kg		
Article number	3431050	4 006825 602005	

#### **ELECTRIC HEDGE TRIMMER**

#### GE-EH 7067

Mains connection / rated input	220 - 240 V ~ 50 I	Hz / 700 W
Bar length	710 mm	
Cutting length	670 mm	
Spacing between teeth	30 mm	
Cuts per minute	3000 min <sup>-1</sup>	
Product weight	3.7 kg	
Protective cover with wall mount	•	
Article number	3403340	4 006825 616170

- Turnable rear handle
   Cutting collector
   Laser-cut and diamond-ground blades
- >> Metal gear box
- Soft grip
   Aluminium cover over cutters
- >> Protection shield
- ➤ Cable-relief clip

#### **ELECTRIC HEDGE TRIMMER**

#### GE-EH 6560

No. of Contract of

	000 04014 50	1 ( ( 5 0 ) ) )
Mains connection / rated input	220 - 240 V ~ 50 Hz / 650 W	
Bar length	660 mm	
Cutting length	600 mm	
Spacing between teeth	30 mm	
Cuts per minute	3000 min <sup>-1</sup>	
Product weight	3.7 kg	
Protective cover with wall mount	•	
Article number	3403330	4 006825 616163

- Turnable rear handle
   Cutting collector
   Laser-cut and diamond-ground blades
- >> Metal gear box
- Soft grip
   Aluminium cover over cutters
- Protection shield
   Cable-relief clip





CEDGERA

**ELECTRIC HEDGE TRIMMER** 

#### GC-EH 6055/1

Mains connection / rated input	220 - 240 V ~ 50 Hz / 600 W	
Bar length	610 mm	
Cutting length	550 mm	
Spacing between teeth	26 mm	
Cuts per minute	2800 min <sup>-1</sup>	
Product weight	3.5 kg	
Protective cover with wall mount	•	
Article number	3403320	4 006825 622157

- ➤ Cutting collector
- >> Laser-cut and diamond-ground blades

- Laser-cut and diamond-ground
   Metal gear box
   Soft grip
   Aluminium cover over cutters
   Protection shield
   Cable-relief clip

## **ELECTRIC HEDGE TRIMMER**

#### GC-EH 4550

NUMPER

Mains connection / rated input	230 V ~ 50 Hz / 4	50 W	
Bar length	560 mm		
Cutting length	500 mm	500 mm	
Spacing between teeth	16 mm		
Cuts per minute	3200 min <sup>-1</sup>		
Product weight	2.5 kg		
Protective cover with wall mount	•		
Article number	3403370	4 006825 608236	

- >> Laser-cut and diamond-ground blades

- Metal gear box
   Soft grip
   Aluminium cover over cutters
   Protection shield
   Cable-relief clip



# **ELECTRIC HEDGE TRIMMER**

#### GH-EH 4245

Mains connection / rated input	230 V ~ 50 Hz / 420 W	
Bar length	510 mm	
Cutting length	450 mm	
Spacing between teeth	16 mm	
Cuts per minute	3200 min <sup>-1</sup>	
Product weight	2.5 kg	
Protective cover with wall mount	•	
Article number	3403460	4 006825 585049





- >> Swivel handle
- >>> Ergonomic handle
- Arti-vibration system
   Autochoke Quick Start System
   Laser-cut blades
   Protection shield
   Safety switch

#### PETROL HEDGE TRIMMER

#### GE-PH 2555 A

Power rating	0.85 kW	
Engine displacement	24.5 cm <sup>3</sup>	
Bar length	610 mm	
Cutting length	550 mm	
Spacing between teeth	28 mm	
Cuts per minute	2050 min <sup>-1</sup>	
Product weight	5.4 kg	
Protective cover	•	
Article number	3403835	4 006825 585186

#### **Maintenance Spray**

Suitable for	Hedge trimmers, grass and shrub shears
Article number	3403099
EAN	4 006825 654608



# Blade change without tools Telescopic handle Large wheels Soft grip



## **CORDLESS GRASS AND SHRUB SHEARS**

#### GC-CG 3,6/70 Li

Li-Ion Battery Pack	3.6 V / 2.0 Ah	
Charging time	3-5 h	
Operating time per battery charge	60 min	
Cutting width with grass shear blade	70 mm	
Cutting length with shrub cutting blade	110 mm	
Spacing between teeth of shrub cutting blade	8 mm	
Product weight	1.0 kg	
Article number	3410360	4 006825 665161

#### **CORDLESS GRASS AND SHRUB SHEARS**

#### GC-CG 3,6/70 Li WT

Li-Ion Battery Pack	3.6 V / 2.0 Ah	
Charging time	3-5 h	
Operating time per battery charge	60 min	
Cutting width with grass shear blade	70 mm	
Cutting length with shrub cutting blade	110 mm	
Spacing between teeth of shrub cutting blade	8 mm	
Product weight	0.6 kg	
Article number	3410365	4 006825 665444



#### **ELECTRIC POLE-MOUNTED PRUNER**

#### GC-EC 7520 T

Mains connection	230 - 240 V ~ 50	Hz
Rated input	750 W	
Bar length	200 mm	
Cutting length	180 mm	
Cutting speed	11 m/s	
Max. working height	3.0 m	
Product weight	3.6 kg	
Protective cover	•	
Carrying belt with quick release	•	
Article number	4501240	4 006825 665277
Spare chain 20cm 16Z	4500124	4 006825 666632
Spare bar 20cm 1,2	4500154	4 006825 666625

- Cutting head tiltableTurnable rear handle
- Laser-cut and diamond-ground blades
   Metal gear box

# **ELECTRIC TELESCOPIC HEDGE TRIMMER**

#### GC-HH 9046

Mains connection	230 - 240 V ~ 50 I	Hz
Rated input	900 W	
Bar length	460 mm	
Cutting length	412 mm	
Spacing between teeth	20 mm	
Max. working height	3.0 m	
Product weight	4.9 kg	
Protective cover	•	
Carrying belt with quick release	•	
Article number	3403880	4 006825 666663

## **ELECTRIC TELESCOPIC HEDGE TRIMMER**

#### GC-HH 5056

Mains connection	230 - 240 V ~ 50 I	Hz
Rated input	500 W	
Bar length	560 mm	
Cutting length	470 mm	
Spacing between teeth	20 mm	
Max. working height	3.0 m	
Product weight	4.2 kg	
Protective cover	•	
Carrying belt with quick release	•	
Article number	3403870	4 006825 666656

Extendable handle
 Cutting head tiltable
 Laser-cut and diamond-ground blades

- >> Metal gear box





# **ELECTRIC MULTIFUNCTIONAL TOOL**

#### GC-HC 90/2046 T

00110 30/2040 1		
Mains connection	230 - 240 V ~ 50	Hz
Rated input	900 W	
Bar length (chainsaw)	200 mm	
Chain cutting speed	11 m/s	
Blade length of hedge trimmer	412 mm	
Spacing between teeth (hedge trimmer)	20 mm	
Max. working height	3.0 m (pruner) / trimmer)	3.0 m (hedge
Product weight	6.9 kg (incl. all attachments)	
Protective cover	•	
Carrying belt with quick release	•	
Article number	4501290	4 006825 666915
Spare chain 20cm 1,1 33T 3/8	4500187	4 006825 615463
Spare bar 20cm 1,2	4500167	4 006825 615456



- Metal gearingOREGON quality bar and chain
- >> Toolless chain tensioning and changing
- >> Automatic chain lubrication
- >> Sturdy stop claws made of metal
- >> Kickback protection with mechanical instant chain brake
- >> Chain catch bolt
- Soft gripSoft start

#### **ELECTRIC CHAINSAW**

#### **GE-EC 2240**

Mains connection	220 - 240 V ~ 50/	/60 Hz
Rated input	2200 W	
Bar length	406 mm	
Cutting length	375 mm	
Cutting speed	15 m/s	
Oil tank capacity	150 ml	
Product weight	5.6 kg	
Protective cover	•	
Article number	4501740	4 006825 602524
Spare chain 40cm (56T)	4500320	4 006825 578126
Spare bar	4500332	4 006825 546637



#### ➤ Metal gearing

- >> Toolless chain tensioning and changing

- Automatic chain tensioning and changing
   Automatic chain lubrication
   Sturdy stop claws made of metal
   Kickback protection with mechanical instant chain brake
- >>> Chain catch bolt
- ➤ Soft grip

## **ELECTRIC CHAINSAW**

#### GC-EC 2040

Mains connection	230 - 240 V ~ 50	Hz
Rated input	2000 W	
Bar length	400 mm	
Cutting length	375 mm	
Cutting speed	15.5 m/s	
Oil tank capacity	160 ml	
Product weight	5.0 kg	
Protective cover	•	
Article number	4501230	4 006825 660036
	~	
Spare chain 40cm 1,3 57T 3/8 (PJ)	4500313	4 006825 663648
Spare bar	4500332	4 006825 546637





- Metal gearing
   Toolless chain tensioning and changing
   Automatic chain lubrication
   Sturdy stop claws made of metal
   Kickback protection with mechanical instant chain brake
- Chain catch boltSoft grip

#### **ELECTRIC CHAINSAW**

#### GC-EC 1935

Mains connection	230 - 240 V ~ 50 H	Ηz
Rated input	1900 W	
Bar length	350 mm	
Cutting length	325 mm	
Cutting speed	15.5 m/s	
Oil tank capacity	160 ml	
Product weight	4.7 kg	
Protective cover	•	
Article number	4501220	4 006825 660029
Spare chain 35cm 1,3 52T 3/8 (PJ)	4500173	4 006825 663655
Spare bar 35cm 1,3	4500158	4 006825 663846



- Metal gearingToolless chain tensioning and changing
- >> Automatic chain lubrication
- Automate chain has reason
   Sturdy stop claws made of metal
   Kickback protection with mechanical instant chain brake
   Chain catch bolt
   Soft grip

#### **ELECTRIC CHAINSAW**

#### **GH-EC 1835**

Mains connection	230 - 240 V ~ 50 H	Ηz
Rated input	1800 W	
Bar length	350 mm	
Cutting length	325 mm	
Cutting speed	13.5 m/s	
Oil tank capacity	160 ml	
Product weight	5.4 kg	
Protective cover	•	
Article number	4501710	4 006825 588156
Spare chain 35cm 1,3 52T 3/8	4500171	4 006825 548846
Spare bar	4500344	4 006825 594188



Chainsaw Trestle		
Profile thickness	1.9 mm	
Maximum load capacity	150 kg	
For tree trunks up to a diameter of	approx. 30 cm	
Product weight	7.1 kg	
Article number	4500067	
EAN	4 006825 548693	



#### **Forest Safety Helmet**

EAN	4 006825"544565
Article number	4500480
Product weight	0.7 kg
Head circumference	52-66 cm

# Profile thickness

**Chainsaw Trestle 2.5** 

	Maximum load capacity	200 kg
	For tree trunks up to a diameter of	approx. 30 cm
	Product weight	8.9 kg
	Article number	4500690
	EAN	4 006825 678826

5	2.5 mm
	200 kg
up to a	approx. 30 cm

79



- > OREGON quality bar and chain
- >> Digital ignition stable engine run
- Autochoke Quick Start System + Primer
   Automatic chain lubrication

- Sturdy stop claws made of metal
   Kickback protection with instant chain brake

# FITTED WITH OREGON CHAIN AND BAR 6 6 CRECK DOUBLE GUAR 0.5

- OREGON quality bar and chain
   Digital ignition stable engine run
   Autochoke Quick Start System + Primer
   Automatic chain lubrication
   Structurate and a started
- >>> Sturdy stop claws made of metal
- >> Kickback protection with instant chain brake

#### **PETROL CHAINSAW**

#### GC-PC 2040 I

Power rating	2.0 kW / 2.7 PS	
Engine displacement	50.4 cm <sup>3</sup>	
Bar length	400 mm	
Cutting length	390 mm	
Cutting speed	21 m/s	
Fuel tank capacity	540 ml	
Oil tank capacity	240 ml	
Product weight	6.5 kg	
Protective cover	•	
Petrol/oil mixing bottle	•	
Article number	4501851	4 006825 613278
Spare chain 40cm (57T) Petrol	4500176	4 006825 548839
Spare bar 40cm 1,3	4500156	4 006825 548778

#### **PETROL CHAINSAW**

#### GC-PC 1335/1 I

Power rating	1.3 kW / 1.7 PS	
Engine displacement	37.2 cm <sup>3</sup>	
Bar length	350 mm	
Cutting length	345 mm	
Cutting speed	21.9 m/s	
Fuel tank capacity	300 ml	
Oil tank capacity	170 ml	
Product weight	5.3 kg	
Protective cover	•	
Petrol/oil mixing bottle	•	
Article number	4501870	4 006825 641738
	·	
Spare chain 35cm 1,3 53T 3/8	4500172	4 006825 600926
Spare bar 35cm 1,3	4500151	4 006825 548907



#### **Chainsaw Trestle**

Product weight Article number	7.1 kg 4500067
For tree trunks up to a diameter of	approx. 30 cm
Maximum load capacity	150 kg
Profile thickness	1.9 mm



#### **Forest Safety Helmet**

Head circumference	52-66 cm
Product weight	0.7 kg
Article number	4500480
EAN	4 006825 544565



#### **Chainsaw Trestle 2.5**

Profile thickness	2.5 mm	
Maximum load capacity	200 kg	
For tree trunks up to a diameter of	approx. 30 cm	
Product weight	8.9 kg	
Article number	4500690	
EAN	4 006825 678826	

#### **Combination Canister**

	EAN	4 006825 542851
	Article number	4501325
	Oil tank capacity	1.25 l
	Petrol tank capacity	31
r	Product weight	0.9 kg
	Product weight	<u>Ο 9 kg</u>



#### **ELECTRIC CHAIN SHARPENER**

#### GC-CS 235 E

Mains connection	230 V ~ 50 Hz	
Rated input	235 W	
Grinding wheel diameter (inside)	22 mm	
Grinding wheel diameter (outside)	145 mm	
Grinding wheel thickness	3.2 mm	
Product weight	5.8 kg	
Article number	4499910	4 006825 613148
Spare grinding wheel 3,2 mm Pro	4599990	4 006825 552881
Spare grinding wheel 4,5 mm Profi	4599980	4 006825 552874

- Depth stop
   Scale for precise setting of the grinding angle
   Clamping device



#### **ELECTRIC CHAIN SHARPENER**

#### GC-CS 85 E

Mains connection	220 - 240 V ~ 50	Hz
Rated input	85 W	
Grinding wheel diameter (inside)	23 mm	
Grinding wheel diameter (outside)	108 mm	
Grinding wheel thickness	3.2 mm	
Product weight	1.9 kg	
Article number	4499920	4 006825 613834
Spare grinding wheel 3.2 mm	4500076	4 006825 548860
Spare grinding wheel 4.5 mm	4500071	4 006825 548853



- >> Toolless change-over between suction and blasting function
- >>> Electronic speed control



#### **ELECTRIC LEAF VACUUM**

#### GC-EL 3000 E

Mains connection	220 - 240 V ~ 50 Hz
Rated input	3000 W
Max. blow velocity	300 km/h
Max. suction power	840 m³/h
Idle speed	8000 - 15000 min <sup>-1</sup>
Shredding function	15:1
Debris bag volume	45 l
Product weight	3.0 kg (blow) / 4.2 kg (vacuum)
Article number	3433320 4 006825 629651

- >> Toolless change-over between Fooliess charge-over between suction and blasting function
   Electronic speed control
   Additional handle

- Guiding wheels
   Debris bag with window
- >> Carrying strap



#### **ELECTRIC LEAF VACUUM**

#### GC-EL 3024 E

Mains connection	230 - 240 V ~ 50 Hz	
Rated input	3000 W	
Max. blow velocity	240 km/h	
Max. suction power	650 m³/h	
Idle speed	7000 - 13500 min <sup>-1</sup>	
Shredding function	10:1	
Debris bag volume	40 l	
Product weight	3.1 kg	
Article number	3433370 4 006825 6586	506

>>> Transport wheels Transport wheels
 Transport handle
 Generous funnel opening >> Motor protection switch



#### **GARDEN SHREDDER**

#### GC-KS 2540 CB

Mains connection	220 - 240 V ~ 50 Hz
Rated input	2500 W (P40) / 2000 W
Idle speed	3800 min <sup>-1</sup>
Max. branch diameter	40 mm
Capacity of catch box	55 l
Product weight	13.0 kg
Prodder incl.	•
Debris box	•
Article number	3430400 4 006825 652765
Spare blade	3405930 4 006825 595680

- Transport wheels
   Transport handle
   Generous funnel opening
- >> Motor protection switch



#### **GARDEN SHREDDER**

#### GC-KS 2540

Mains connection	220 - 240 V ~ 50 Hz	
Rated input	2500 W (P40) / 2000 W	
Idle speed	3800 min <sup>-1</sup>	
Max. branch diameter	40 mm	
Product weight	10.2 kg	
Prodder incl.	•	
Garden rubbish bag	•	
Article number	3430330	4 006825 638233
Spare blade	3405930	4 006825 595680

- Transport wheels
   Transport handle
   Reverse running switch
- Generous funnel opening
   Safety switch



#### **ELECTRIC ROLLER SHREDDER**

#### GC-RS 60 CB

Mains connection	230 - 240 V ~ 50	230 - 240 V ~ 50 Hz		
Rated input	2800 W (P40) /	2800 W (P40) / 2300 W		
Idle speed	40 min <sup>-1</sup>	40 min <sup>-1</sup>		
Max. branch diameter	45 mm	45 mm		
Capacity of catch box	60 I	60		
Product weight	29.5 kg	29.5 kg		
Debris box	•	•		
Article number	3430635	4 006825 645880		

- Transport wheels
   Transport handle
   Reverse running switch
   Generous funnel opening



#### **ELECTRIC ROLLER SHREDDER**

#### GC-RS 2540

Mains connection	230 V ~ 50 Hz		
Rated input	2500 W (P40) / 2000 W		
Idle speed	40 min <sup>-1</sup>		
Max. branch diameter	40 mm		
Product weight	24.9 kg		
Garden rubbish bag	•		
Article number	3430620 4 006825 608403		



- ➤ Aqua Sensor Technology
- >> Permanent mode without sensor start
- >> Non-return valve
- High-quality mechanical seal
   Carry handle
   Lifting eye
   ECO Power



#### **'AQUA SENSOR' CLEAR WATER PUMP**

#### GE-SP 4390 N-A LL ECO

Mains voltage	230 V ~ 50 Hz	
Rated input	430 W	
Max. delivery capacity / height	9000 l/h / 8 m	
Max. immersion depth	7 m	
Max. size of foreign particle	1 mm	
Pump start during continuous operation	5 mm	
Sensor start heights 1 / 2 / 3	5 / 56 / 103 mm	
Works in shallow clean water as low as	1 mm	
Hose connection	47.8 mm (1½") ET	
Power cord	10 m	
Product weight	4.9 kg	
Universal hose adapter	•	
Article number	4171440	4 006825 622263
Quick connector	4173764	4 006825 673166

#### 'AQUA SENSOR' DIRTY WATER PUMP

**GE-DP 7935 N-A ECO** 

Mains voltage	230 V ~ 50 Hz
Rated input	790 W
Max. delivery capacity / height	19000 l/h / 9 m
Max. immersion depth	7 m
Max. size of foreign particle	35 mm
Pump start during continuous operation	50 mm
Sensor start heights 1 / 2 / 3	70 / 135 / 188 mm
Suction down to	40 mm
Hose connection	47.8 mm (1½") ET
Power cord	10 m
Product weight	6.2 kg
Universal hose adapter	•
Article number	4171460 4 006825 622287
Quick connector	4173764 4 006825 673166

- Aqua Sensor TechnologyPermanent mode without sensor start
- >> Non-return valve
- High-quality mechanical seal
   Integrated cable rewind
   Carry handle

- Lifting eye
   ECO Power



## 'AQUA SENSOR' DIRTY WATER PUMP

#### **GE-DP 6935 A ECO**

Mains voltage	230 V ~ 50 Hz
Rated input	690 W
Max. delivery capacity / height	17500 l/h / 9 m
Max. immersion depth	7 m
Max. size of foreign particle	35 mm
Pump start during continuous operation	50 mm
Sensor start heights 1 / 2 / 3	70 / 135 / 188 mm
Suction down to	40 mm
Hose connection	47.8 mm (1½") ET
Power cord	10 m
Product weight	5.7 kg
Universal hose adapter	•
Article number	4171450 4 006825 622270
Quick connector	4173764 4 006825 673166

- Aqua Sensor Technology
   Permanent mode without sensor start
   Non-return valve
   High-quality mechanical seal
   Interact databased

- >> Integrated cable rewind
- >> Carry handle
- Lifting eye
   ECO Power







- ≫ 3-in-1 function: Pumping of clear water, dirty water and Aquasensor
- >> Aqua Sensor Technology
- >> Permanent mode without sensor start
- >> Patented suction level control
- >> Non-return valve
- High-quality mechanical seal
   Integrated cable rewind
   Carry handle

- >> Lifting eye
- > ECO Power



#### **MULTI-PURPOSE PUMP**

#### GE-DP 7935 N-A LL ECO

Mains voltage	220 - 240 V ~ 50 Hz	
Rated input	790 W	
Max. delivery capacity / height	19500 l/h / 9 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Sensor start heights 1 / 2 / 3 in clear water mode	15 / 100 / 150 mm	
Sensor start heights 1 / 2 / 3 in dirt water mode	50 / 130 / 180 mm	
Starting of pump from water level of	15 mm	
Works in shallow clean water as low as	1 mm	
Hose connection	47.8 mm (1½") ET	
Power cord	10 m	
Product weight	6.3 kg	
Universal hose adapter	•	
Quick Connector	•	
Article number	4171465 4 006825 673357	
Quick connector	4173764 4 006825 673166	

>> 2-in-1 function: Pumping of clear water and dirty water

- >> Float switch
- >> Patented suction level control
- >> Non-return valve
- >> High-quality mechanical seal
- >> Integrated cable rewind
- >> Carry handle
- Lifting eye
   ECO Power



#### **MULTI-PURPOSE PUMP**

#### GE-DP 7535 N LL ECO

Mains voltage	220 - 240 V ~ 50 I	Hz
Rated input	750 W	
Max. delivery capacity / height	18500 l/h / 9 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Starting of pump from water level of	15 mm	
Works in shallow clean water as	1 mm	
low as	1 mm	
Hose connection	47.8 mm (1½") ET	
Power cord	10 m	
Product weight	6.3 kg	
Universal hose adapter	•	
Quick Connector	•	
Article number	4181600	4 006825 673364
Quick connector	4173764	4 006825 673166

#### **NEW**



- >> 2-in-1 function: Pumping of clear water and dirty water
- >>> Float switch
- >> Patented suction level control
- >>> Non-return valve
- >> High-quality mechanical seal
- >> Integrated cable rewind
- >> Carry handle
- >>> Lifting eye > ECO Power
- >> Hinged filter box
- >>> Quick couplings
- >> Fabric Hose



#### **MULTI-PURPOSE PUMP**

#### Flood Set GE-DP 7535 N LL ECO

Mains voltage	220 - 240 V ~ 50 I	H7
Rated input	750 W	
Max. delivery capacity / height	18500 l/h / 9 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Starting of pump from water level of	15 mm	
Works in shallow clean water as	1311111	
low as	1 mm	
Hose connection	47.8 mm (1½") ET	
Power cord	10 m	
Product weight	12 kg	
Universal hose adapter	•	
Quick Connector	•	
Fabric hose (10 m)	•	
Plastic box	•	
Article number	4181515	4 006825 683158
		·
Quick connector	4173764	

Quick connector



- >>> Float switch
- Production level control
   Patented suction level control
   Non-return valve
   High-quality mechanical seal

- > Integrated cable rewind
- ➤ Carry handle



#### **MULTI-PURPOSE PUMP**

#### GC-DP 7035 LL

Mains voltage	230 V ~ 50 Hz	
Rated input	700 W	
Max. delivery capacity / height	16000 l/h / 8 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Starting of pump from water level of	10 mm	
Works in shallow clean water as low as	1 mm	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Product weight	4.5 kg	
Universal hose adapter	•	
Article number	4181570	4 006825 662085
Quick connector	4173764	4 006825 673166

- Integrated lifting eye
   High-quality mechanical seal
   Floating switch (automatic + manual mode)
   Integrated cable rewind

>> ECO Power

>> Carry handle



#### SUBMERSIBLE PUMP DIRTY/CLEAR WATER ECO

#### **GE-DP 3925 ECO**

Suitable for	Dirty water	
Mains voltage	230 V ~ 50 Hz	
Rated input	390 W	
Max. delivery capacity / height	10000 l/h / 6 m	
Max. immersion depth	7 m	
Min. water level for pump start	50 mm	
Max. size of foreign particle	25 mm	
Hose connection	47.8 mm (1½") ET	
Power cord	10 m	
Product weight	4.5 kg	
Universal hose adapter	•	
Article number	4170710	4 006825 572339
Quick connector	4173764	4 006825 673166

# High-quality mechanical seal Floating switch (automatic mode)

- >> Cast housing
- >> Carry handle



#### **DIRTY WATER PUMP**

#### GC-DP 1340 G

Mains voltage	230 V ~ 50 Hz	
Rated input	1300 W	
Max. delivery capacity / height	23000 l/h / 10 m	
Max. immersion depth	5 m	
Max. size of foreign particle	40 mm	
Hose connection	59.6 mm (2") IT	
Power cord	10 m	
Product weight	19.3 kg	
Universal hose adapter	•	
Lowering rope (6 m)	•	
Article number	4170742	4 006825 597882

- High-quality mechanical seal
   Floating switch (automatic mode)
   Cast housing
   Carry handle
   Cutting unit system



#### **DIRTY WATER PUMP**

#### GE-DP 900 Cut

Mains voltage	230 V ~ 50 Hz	
Rated input	900 W	
Max. delivery capacity / height	16000 l/h / 11.5 m	
Max. immersion depth	7 m	
Hose connection	59.6 mm (2") IT	
Power cord	10 m	
Product weight	17.0 kg	
Universal hose adapter	•	
Article number	4181550	4 006825 660852

High-quality mechanical seal
 Floating switch (automatic mode)
 Carry handle



#### **DIRTY WATER PUMP**

#### GC-DP 5010 G

Mains voltage	220 - 240 V ~ 50 Hz	
Rated input	500 W	
Max. delivery capacity / height	12000 l/h / 8 m	
Max. immersion depth	5 m	
Max. size of foreign particle	10 mm	
Hose connection	42 mm (1¼") IT	
Power cord	10 m	
Product weight	10.6 kg	
Universal hose adapter	•	
Article number	4171421 4 006825 626193	

- High-quality mechanical seal
   Floating switch (automatic + manual mode)
   Integrated cable rewind
   Carry handle



#### **DIRTY WATER PUMP**

#### GC-DP 9040 N

Mains voltage	230 V ~ 50 Hz	
Rated input	900 W	
Max. delivery capacity / height	22000 l/h / 9 m	
Max. immersion depth	7 m	
Max. size of foreign particle	40 mm	
Hose connection	59.6 mm (2") IT	
Power cord	10 m	
Product weight	7.5 kg	
Universal hose adapter	•	
Article number	4181510	006825 654189



#### **NEW**

- >> High-quality mechanical seal
   >> Floating switch (automatic + manual mode)
   >> Integrated cable rewind
   >> Carry handle
   >> ECO-PLUS technology

High-quality mechanical seal
 Floating switch (automatic + manual mode)

Integrated cable rewind
 Carry handle



#### **DIRTY WATER PUMP**

#### GC-DP 7035 N ECO PLUS

Mains voltage	220 - 240 V ~ 50 I	Ηz	
Rated input	700 W		
Max. delivery capacity / height	19000 l/h / 8 m	19000 l/h / 8 m	
Max. immersion depth	7 m		
Max. size of foreign particle	35 mm		
Hose connection	47.8 mm (1½") IT		
Power cord	10 m		
Product weight	5.0 kg		
Universal hose adapter	•		
Article number	4170765	4 006825 680928	
Quick connector	4173764	4 006825 673166	

#### **DIRTY WATER PUMP**

#### GC-DP 7835

Mains voltage	230 V ~ 50 Hz	
Rated input	780 W	
Max. delivery capacity / height	15700 l/h / 8 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Product weight	5.2 kg	
Universal hose adapter	•	
Quick Connector	•	
Article number	4170682	4 006825 587210
Quick connector	4173764	4 006825 673166

- High-quality mechanical seal
   Floating switch (automatic + manual mode)
   Integrated cable rewind
   Carry handle



#### **DIRTY WATER PUMP**

#### GC-DP 6315 N

Mains voltage	230 V ~ 50 Hz	
Rated input	630 W	
Max. delivery capacity / height	17000 l/h / 8 m	
Max. immersion depth	5 m	
Max. size of foreign particle	15 mm	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Product weight	4.7 kg	
Universal hose adapter	•	
Article number	4170491	4 006825 587234
Quick connector	4173764	4 006825 673166

- >> High-quality mechanical seal
- Floating switch (automatic + manual mode)
   Carrying handle (foldable)



#### **DIRTY WATER PUMP**

#### GC-DP 3325

Mains voltage	230 V ~ 50 Hz		
Rated input	330 W		
Max. delivery capacity / height	9500 l/h / 6 m	9500 l/h / 6 m	
Max. immersion depth	7 m	7 m	
Max. size of foreign particle	25 mm		
Hose connection	47.8 mm (1½") IT		
Power cord	10 m		
Product weight	3.6 kg		
Universal hose adapter	•		
Article number	4181530	4 006825 655087	
Quick connector	4173764	4 006825 673166	

Integrated float switch (automatic + manual mode)
 Carry handle



#### **CLEAR WATER PUMP**

#### GC-SP 5511 IF

Mains voltage	230 V ~ 50 Hz	
Rated input	550 W	
Max. delivery capacity / height	11000 l/h / 8.5 m	
Max. immersion depth	7 m	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Min. water level for pump start	60 mm	
Suction down to	5 mm	
Product weight	4.4 kg	
Universal hose adapter	•	
Article number	4170463	4 006825 623581
Quick connector	4173764	4 006825 673166

#### **CLEAR WATER PUMP**

#### GC-SP 3580 LL

Mains voltage	230 V ~ 50 Hz	
Rated input	350 W	
Max. delivery capacity / height	8000 l/h / 7.5 m	
Max. immersion depth	7 m	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Min. water level for pump start	8 mm	
Suction down to	1 mm	
Product weight	3.1 kg	
Universal hose adapter	•	
Quick Connector	•	
Article number	4170445	4 006825 615197
Quick connector	4173764	

Quick connector

4173764 4 006825 673166

High-quality mechanical seal
 Floating switch (automatic + manual mode)
 Carrying handle (foldable)

High-quality mechanical seal
 Floating switch (automatic + manual mode)
 Integrated cable rewind
 Carry handle

#### **CLEAR WATER PUMP**

GC-SP	2275
-------	------

Mains voltage	230 V ~ 50 Hz		
Rated input	220 W		
Max. delivery capacity / height	7500 l/h / 6 m		
Max. immersion depth	7 m		
Hose connection	47.8 mm (1½") IT		
Power cord	10 m	10 m	
Suction down to	8 mm	8 mm	
Product weight	3.4 kg		
Universal hose adapter	•		
Article number	4181520	4 006825 655070	
Quick connector	4173764	4 006825 673166	





- Infinitely variable floating switch
   Integrated cable rewind
- Carry handle
- >> Flexible gooseneck
- Storage compartment for extensions



- >> Automatic mode
- >>> Dry running protection
- A-stage pump impeller
   High-quality mechanical seal
- >>> Overload cut-out
- >> Integrated non-return valve
- >>> Stainless dirt screen
- >> High-quality INOX steel pump housing
- ➤ Carry handle



#### **RAIN BARREL PUMP**

#### GE-SP 3546 RB

Mains voltage	230 V ~ 50 Hz	
Rated input	350 W	
Max. delivery capacity / height	4600 l/h / 11 m	
Max. immersion depth	7 m	
Max. size of foreign particle	2.5 mm	
Hose connection	26.4 mm (¾") ET	
Power cord	10 m	
Product weight	5.0 kg	
Article number	4170438	4 006825 623598

#### SUBMERSIBLE PRESSURE PUMP

#### GE-PP 1100 N-A

Mains voltage	220 - 240 V ~ 50	Hz
Rated input	1100 W	
Max. delivery capacity / height	6000 l/h / 45 m	
Max. immersion depth	12 m	
Hose connection	33.3 mm (1") IT	
Power cord	15 m	
Product weight	8.7 kg	
Article number	4171430	4 006825 622294

#### SUBMERSIBLE PRESSURE PUMP

#### GC-PP 900 N

Mains voltage	230 V ~ 50 Hz	
Rated input	900 W	
Max. delivery capacity / height	6000 l/h / 32 m	
Max. immersion depth	7 m	
Hose connection	33.3 mm (1") IT	
Power cord	10 m	
Product weight	8.9 kg	
Article number	4170964	4 006825 597752

- ≫ 3-stage pump impeller
- >> High-quality mechanical seal
- >> Overload cut-out

>> Float switch

High-quality INOX steel pump housing

#### >> Automatic mode

- >> Dry running protection
- **》** 2-stage pump impeller
- >> High-quality mechanical seal
- >> Overload cut-out ➤ Integrated non-return valve
- Integrated cable rewind
- >> Carry handle
- >> Telescopic extension tube
- >>> Flexible gooseneck



#### SUBMERSIBLE PRESSURE PUMP

#### **GE-PP 5555 RB-A**

Mains voltage	230 - 240 V ~ 50 l	Hz
Rated input	550 W	
Max. delivery capacity / height	5500 l/h / 20 m	
Max. immersion depth	7 m	
Hose connection	33.3 mm (1") ET	
Power cord	10 m	
Product weight	5.0 kg	
Article number	4170425	4 006825 648690

- >> Automatic mode

- Automatic mode
   Dry running protection
   8-stage pump impeller
   High-quality mechanical seal
- >>> Overload cut-out
- >> Integrated non-return valve
- >> High-quality INOX steel pump housing



**DEEP WELL PUMP** 

#### **GE-DW 1155 N-A**

Mains voltage	220 - 240 V ~ 50 I	Ηz
Rated input	1100 W	
Max. delivery capacity / height	6000 l/h / 55 m	
Max. immersion depth	19 m	
Hose connection	33.3 mm (1") IT	
Power cord	22 m	
Pump diameter	98 mm	
Product weight	9.8 kg	
Lowering rope (22 m)	•	
Article number	4170937	4 006825 660876

- ➤ 10-stage pump impeller
- High-quality mechanical seal
   Overload cut-out

- > Integrated non-return valve
   > Stainless dirt screen
   > High-quality INOX steel pump housing



#### **DEEP WELL PUMP**

#### GC-DW 1300 N

Mains voltage	230 V ~ 50 Hz	
Rated input	1300 W	
Max. delivery capacity / height	5000 l/h / 65 m	
Max. immersion depth	20 m	
Hose connection	47.8 mm (1½") IT	
Power cord	2 m / 23 m	
Pump diameter	102 mm	
Product weight	15.5 kg	
External switchbox	•	
Lowering rope (20 m)	•	
Article number	4170944	4 006825 597875

- 6-stage pump impeller
   High-quality mechanical seal
   Overload cut-out
- >> Integrated non-return valve
- Stainless dirt screen
   High-quality INOX steel pump housing



#### **DEEP WELL PUMP**

#### GC-DW 1045 N

Mains voltage	220 - 240 V ~ 50 I	Ηz
Rated input	1000 W	
Max. delivery capacity / height	6500 l/h / 45 m	
Max. immersion depth	19 m	
Hose connection	42 mm (1¼") IT	
Power cord	22 m	
Pump diameter	98 mm	
Product weight	7.7 kg	
Lowering rope (22 m)	•	
Article number	4170955	4 006825 616446



- ➤ Water filler screw
- Water filler service
   Water filling / dirt / suction indicators
   Integrated pre-filter with non-return valve
- >> Comfort carrying handle
- >> Frost protection due to a water drain screw
- >> Thermo protection
- >> Water flow recognition sensor / dry running protection / scalding protection



- Water filler screw
   Water filling / dirt / suction indicators
- >> Integrated pre-filter with non-return valve
- >> Comfort carrying handle
- >> Frost protection due to a water drain screw
- >>> Thermo protection
- >> ECO Power



- Water filler screwWater filling indicator
- >> Comfort carrying handle
- >> Frost protection due to a water drain screw
- >>> Thermo protection
- ECO-PLUS technology
   High pumping capacity with low power consumption

#### **GARDEN PUMP 'PLUS'**

#### **GE-GP 1246 N FS**

Mains voltage	220 - 240 V ~ 50 H	Ηz
Rated input	1200 W	
Max. delivery capacity / height	4600 l/h / 50 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	14.0 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180360	4 006825 640366

#### **GARDEN PUMP 'PLUS'**

#### **GE-GP 1145 ECO**

Mains voltage	220 - 240 V ~ 50 H	17
		72
Rated input	1100 W	
Max. delivery capacity / height	4500 l/h / 48 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	14.0 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180370	4 006825 647884

#### **GARDEN PUMP 'PLUS'**

#### GC-GP 1170 ECO PLUS

Mains voltage	220 - 240 V ~ 50 I	Ηz
Rated input	1100 W	
Max. delivery capacity / height	7000 l/h / 50 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	9.5 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180220	4 006825 679779





- Water filler screw
   Water filling indicator
   Comfort carrying handle
   Frost protection due to a water drain screw
   Thermo protection



- ➤ Water filler screw

- Water filling indicator
   Comfort carrying handle
   Frost protection due to a water drain screw
   Thermo protection



#### **GARDEN PUMP 'PLUS'**

#### GC-GP 1250 N/1

Mains voltage	220 - 240 V ~ 50 H	lz
Rated input	1200 W	
Max. delivery capacity / height	5000 l/h / 50 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	9.7 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180350	4 006825 637281

#### **GARDEN PUMP 'PLUS'**

#### GC-GP 1045

Mains voltage	220 - 240 V ~ 50 I	Hz
Rated input	1050 W	
Max. delivery capacity / height	4500 l/h / 48 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	9.5 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180340	4 006825 637274

#### **GARDEN PUMP 'PLUS'**

#### GC-GP 6050 ECO PLUS

Mains voltage	220 - 240 V ~ 50 I	Hz
Rated input	600 W	
Max. delivery capacity / height	5000 l/h / 40 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	6.5 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180210	4 006825 679786

- Water filler screw
  Water filling indicator
- >> Folding carrying handle
- >> Frost protection due to a water drain screw

- Thermo protection due to a water drain screw
   ECO-PLUS technology
   High pumping capacity with low power consumption



- Water filler screw
   Water filling indicator
   Folding carrying handle
   Frost protection due to a water drain screw
   Thermo protection
   ECO Power



➤ Water filler screw

Water finite screw
 Water drain screw
 High-quality mechanical seal
 Carry handle

#### **GARDEN PUMP 'PLUS'**

#### GC-GP 6040 ECO

Mains voltage	220 - 240 V ~ 50 I	Ηz
Rated input	600 W	
Max. delivery capacity / height	4000 l/h / 36 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	6.1 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180320	4 006825 637250

#### GC-GP 6538

Mains voltage	220 - 240 V ~ 50 H	Ηz
Rated input	650 W	
Max. delivery capacity / height	3800 l/h / 36 m	
Max. suction height	8 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") ET	
Power cord	1.4 m	
Product weight	6.1 kg	
Pump without accessories (GC-GP 6538)	Article number 4180280	4 006825 603477
Pump with suction hose (7 m) (GC- GP 6538 Set)	Article number 4180283	4 006825 611168
Pump with suction hose (4 m), gar- den hose (20 m) and sprayer (GC-GP 6538 Set/l)	Article number 4180286	4 006825 638875



>> Water filler screw Water drain screw
 Carry handle

## **GARDEN PUMP**

#### GC-GP 6036

Mains voltage	230 V ~ 50 Hz	
Rated input	600 W	
Max. delivery capacity / height	3600 l/h / 40 m	
Max. suction height	8 m	
Suction connection	33.3 mm (1") IT	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	7.4 kg	
Article number	4180269	4 006825 623567





>> Water filler screw >>> Water drain screw

#### PERIPHERAL PUMP

#### GC-TP 4622

Mains voltage	220 - 240 V ~ 50	Hz
Rated input	460 W	
Max. delivery capacity / height	2250 l/h / 37 m	
Suction connection	33.3 mm (1") IT	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	6.1 kg	
Article number	4183400	4 006825 643947







- >> Timer function
- >> Water filler screw
- Water filler screw
   Water filling / dirt / suction indicators
   Integrated pre-filter with non-return valve
   Comfort carrying handle

- >> Frost protection due to a water drain screw
- >> Thermo protection
- Water flow recognition sensor / dry running protection / scalding protection



- >> Automatic mode
- >> Water filler screw

- Water filling / dirt / suction indicators
   Integrated pre-filter with non-return valve
   Comfort carrying handle
   Frost protection due to a water drain screw
- >> Thermo protection
- >> Water flow recognition sensor / dry running protection / scalding protection

#### AUTOMATIC HOME AND GARDEN PUMP 'PLUS'

#### **GE-AW 1246 N FS**

Mains voltage	220 - 240 V ~ 50 H	Ηz
Rated input	1200 W	
Max. delivery capacity / height	4600 l/h / 50 m	
Max. pressure	5.0 bar	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	15.0 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4177020	4 006825 642476

#### AUTOMATIC HOME AND GARDEN PUMP 'PLUS'

#### **GE-AW 1042 FS**

Mains voltage	220 - 240 V ~ 50 H	Z
Rated input	1050 W	
Max. delivery capacity / height	4200 l/h / 48 m	
Max. pressure	4.8 bar	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	15.0 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4177010	4 006825 642469



>> App (GSM / Smart)

- >> Programmable operating time for each specific day
- >> Schedule calculation based on current weather data
- >> Networkable with all Einhell SMART devices
- >> Automatic mode
- >>> Dry running protection
- ➤ LED indicator
- >> Water filler screw
- ➤ Water drain screw
- >> Pre-filter + non-return valve
- >>> Thermo protection



#### CAN BE CONTROLLED FROM EVERYWHERE

The smart pump can now be controlled from anywhere\* using a smartphone, thanks to the device's mobile internet connection.



#### **SMART MODE**

In smart mode, the pump automatically creates a schedule that is optimally adapted to the weather, customer preferences and behaviour. The pump learns the customer's behaviour based on the application (using AI).



#### CONSIDERATION OF WEATHER FORE-CASTS

In Smart Mode, the pump adapts to the local weather conditions thanks to weather forecasts in order to achieve the optimum result.

Another SMART tool from the Einhell range: PROFESSIONAL Robot Lawn Mower FREELEXO SMART 750

# AUTOMATIC HOME AND GARDEN PUMP SMART

#### GE-AW 1144 SMART

Mains voltage	220 - 240 V ~ 50 I	Hz	
Rated input	1100 W		
Max. delivery capacity / height	4400 l/h / 48 m	4400 l/h / 48 m	
Max. pressure	4.8 bar		
Max. suction height	8 m	8 m	
Suction connection	42 mm (1¼") ET	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT		
Power cord	1.5 m		
Product weight	11.4 kg		
Article number	4180380	4 006825 659986	



#### SCHEDULE MODE

The pump's operating times can be set to the minute using the Schedule Mode.



#### NETWORKABLE WITH EINHELL SMART TOOLS

Einhell Smart Tools work together automatically in Smart Mode.



#### NO WIFI OR BLUETOOTH NEEDED

Unlimited range thanks to communication via the mobile phone network.

\* Prerequisite: Available mobile network coverage; within the European Union



Automatic mode

- >>> Dry running protection
- LED indicatorWater filler screw
- ➤ Water drain screw
- >> Pre-filter with integrated non-return valve
- >> Carry handle

## AUTOMATIC HOME AND GARDEN PUMP

GC-AW 6333		
Mains voltage	230 V ~ 50 Hz	
Rated input	630 W	
Max. delivery capacity / height	3300 l/h / 36 m	
Max. pressure	3.6 bar	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	7.8 kg	
Article number	4176730	4 006825 609226



## WATER WORK 'PLUS'

#### **GE-WW 1246 N FS**

Mains voltage	220 - 240 V ~ 50 H	Ηz
Rated input	1200 W	
Max. delivery capacity / height	4600 l/h / 50 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Tank volume	201	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Power cord	1.5 m	
Product weight	19.5 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4173530	4 006825 640373



➤ Water filler screw

- >> Water filling / dirt / suction indicators
- >> Integrated pre-filter with non-return valve
- Comfort carrying handle
   Frost protection due to a water drain screw
- >>> Thermo protection
- Water flow recognition sensor / dry running protection / scalding protection





- Water filler screwWater filling / dirt / suction indicators
- >> Integrated pre-filter with non-return valve
- >> Comfort carrying handle
- >> Frost protection due to a water drain screw
- >>> Thermo protection



# WATER WORK 'PLUS'

#### **GE-WW 1145 ECO**

Mains voltage	220 - 240 V ~ 50 H	Hz
Rated input	1100 W	
Max. delivery capacity / height	4500 l/h / 48 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Tank volume	201	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Power cord	1.5 m	
Product weight	19.5 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4173540	4 006825 647891

#### WATER WORK 'PLUS'

#### GC-WW 1045 N

Mains voltage	220 - 240 V ~ 50 I	Ηz
Rated input	1050 W	
Max. delivery capacity / height	4500 l/h / 48 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Tank volume	201	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Power cord	1.5 m	
Product weight	17.3 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4173520	4 006825 637304



- ➤ Water filler screw
- ➤ Water filling indicator
- Comfort carrying handle
   Frost protection due to a water drain screw
- >> Thermo protection





# >> Overload protection >> Water filler screw >> Water drain screw

- Water drain screw
   High-quality mechanical seal
   INOX stainless steel pressure tank
   Pressure gauge

#### WATER WORK

#### GC-WW 1250 NN

Mains voltage	220 - 240 V ~ 50 I	Ηz
Rated input	1200 W	
Max. delivery capacity / height	5000 l/h / 50 m	
Max. suction height	8 m	
Tank volume	201	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	14.7 kg	
Article number	4173490	4 006825 616316



#### WATER WORK

#### GC-WW 6538

Mains voltage	220 - 240 V ~ 50 H	Hz
Rated input	650 W	
Max. delivery capacity / height	3800 l/h / 36 m	
Max. suction height	8 m	
Tank volume	20	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") ET	
Power cord	1.4 m	
Product weight	10.5 kg	
Water Work without suction hose (7 m) (GC-WW 6538 Set)	Article number 4173190	4 006825 603484
		4 000029 003404
Water Work with suction hose (7 m) (GC-WW 6538 Set)	Article number 4173193	4 006825 611175

#### >> Overload protection

>> Water filler screw

- >> Water drain screw



Overload protection
Water filler screw
Pressure gauge

#### GC-WW 6036 Mains voltage

WATER WORK

Mains voltage	230 V ~ 50 Hz	
Rated input	600 W	
Max. delivery capacity / height	3600 l/h / 40 m	
Max. suction height	8 m	
Tank volume	201	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Suction connection	33.3 mm (1") IT	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	14.3 kg	
Article number	4173118	4 006825 623574





#### **GE-PW 46**

Engine	Four-stroke			
Power rating	4.6 / 6.3 kW			
Max. delivery capacity / height	23000 l/h / 26 m			
Max. suction height	6.5 m			
Max. speed	3600 min <sup>-1</sup>			
Suction connection	59.6 mm (2") ET			
Pressure connection	59.6 mm (2") ET			
Fuel tank capacity	3.61			
Product weight	21.8 kg			
Incl. hose adapter	2x 50.8 mm (2")			
Incl. intake cage	• (2")			
Incl. reducer section	2x 47.8 mm (1.5") ET, 2x 33.3 mm (1") ET			
Article number	4171372	4 006825 643978		



Non-return valve
Water filler port
Water drain screw
Oil filling screw
Low oil stop

#### **PETROL WATER PUMP**

#### GC-PW 16

Engine	Four-stroke		
Power rating	1.8 / 2.4 kW		
Max. delivery capacity / height	14000 l/h / 28 m		
Max. suction height	7.0 m		
Max. speed	3600 min <sup>-1</sup>		
Suction connection	47.8 mm (1½") ET		
Pressure connection	47.8 mm (1½") ET		
Fuel tank capacity	1.3		
Product weight	12.0 kg		
Incl. hose adapter	2x 38.1 mm (1.5")		
Incl. intake cage	• (1.5")		
Article number	4190530 4 1006825 64467		

#### **Surface Pumps Accessories**

Suction Hose (7 m) with Brass Con- nectors	Article number 4173640	4 006825 549171
Suction Hose (4 m) with Brass Con- nectors	Article number 4173630	4 006825 549133
Suction Hose (7 m) with Plastic Connectors	Article number 4173645	4 006825 549102
Suction Hose (4 m) with Plastic Connectors	Article number 4173635	4 006825 549058
Coarse Filter 25 cm	Article number 4173851	4 006825 549195
Coarse Filter 12 cm	Article number 4173801	4 006825 549188
Electronic Flow Switch	Article number 4174230	4 006825 667738



# MORE POWER FOR PROS.



#### NO COMPROMISES. EXTENDED WARRANTY FOR PROFESSIONAL TOOLS.

Einhell delivers the quality expected of tools for commercial use. This is why we also offer an extended warranty for all PROFESSIONAL tools:

Regular guarantee period	1 year
Extension upon registration	2 years
Total guarantee period	3 years (1+2)



## THIS IS HOW:

- 1. **Inform** yourself on einhell.de
- 2. **Register** in your customer account
- 3. **Apply** for the guarantee within 30 days of the date of purchase

www.einhell.de/en/services/warranties/





# **OUR PROMISE** TO DIY PROFESSIONALS AND EXPERTS

True Pros always give MORE. Because every step demands perfection. Where precision is a must. And every second counts. Professionals also expect more from their tools. NOW EINHELL GIVES THEM MORE.


# MORE PERFORMANCE.\* MORE ENDURANCE.\* MORE WARRANTY.\*\* MORE LIFETIME.\* MORE FUNCTIONALITY.\*

Approximate values compared to carbon brush motor
 On Brushless Motors after online registering

# WITH BRUSHLESS MOTOR

- **25%** MORE power\*
- **50%** MORE endurance\*
- **100%** MORE lifetime\*
  - **10 years** warranty\*\*

\* Approximate values compared to carbon brush motor
 \*\* On Brushless Motors after online registering







# **PROFESSIONAL ROBOT LAWN MOWER**

- PXC SYSTEM BATTERY
- SMART CONNECTIVITY (GSM/NB-IOT)
- CAN BE CONTROLLED FROM ANYWHERE VIA APP NO WIFI OR BLUE-TOOTH REQUIRED
- SMART MODE AUTOMATIC SCHEDULE CREATION, OPTIMISED FOR WEATHER, GARDEN SIZE AND CUSTOMER PREFERENCES
- NETWORKABLE WITH ALL EINHELL SMART DEVICES
- LCD DISPLAY
- MULTI AREA MOWING
- SPOT MOWING





#### **FREELEXO SMART 750**

PXC battery voltage	18 V			
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	750 m²			
Cutting width	18 cm			
Cutting height adjustment	infinitely / 20 - 60 mm / central			
Suitable for slopes up to	35 %			
Supplied with perimeter wire	175 m			
Supplied with fastening hooks	245 pcs			
Supplied with accessories	3 connecting clamps, 3 blades			
Incl. 1 battery (18 V 3.0 Ah Li-ion)	Article number 3413811	4 006825 665543		

#### **Robot Lawn Mowers without Perimeter Wire - Accessories**

FREELEXO

F	Robot Lawn Mower Garage	Article number 3414024	4 006825 654417
	Perimeter Wire	Article number 3414021	4 006825 648782
	Spare Blades	Article number 3414020	4 006825 648775
, O	Repair Kit	Article number 3414026	4 006825 657968
	Connection Clamps	Article number 3414022	4 006825 648799
A	Fastening Hooks	Article number 3414023	4 006825 648805
	Cleaning Set	Article number 3414025	4 006825 657951









#### CAN BE CONTROLLED FROM EVERYWHERE

The smart pump can now be controlled from anywhere\* using a smartphone, thanks to the device's mobile internet connection.



#### **SMART MODE**

In smart mode, the pump automatically creates a schedule that is optimally adapted to the weather, customer preferences and behaviour. The pump learns the customer's behaviour based on the application (using AI).



# CONSIDERATION OF WEATHER FORE-

In Smart Mode, the pump adapts to the local weather conditions thanks to weather forecasts in order to achieve the optimum result.



#### NETWORKABLE WITH EINHELL SMART TOOLS

Einhell Smart Tools work together automatically in Smart Mode.




#### NO WIFI OR BLUETOOTH NEEDED

Unlimited range thanks to communication via the mobile phone network.

\* Prerequisite: Available mobile network coverage; within the European Union

Another SMART tool from the Einhell range: Automatic Home and Garden Pump GE-AW 1144 SMART

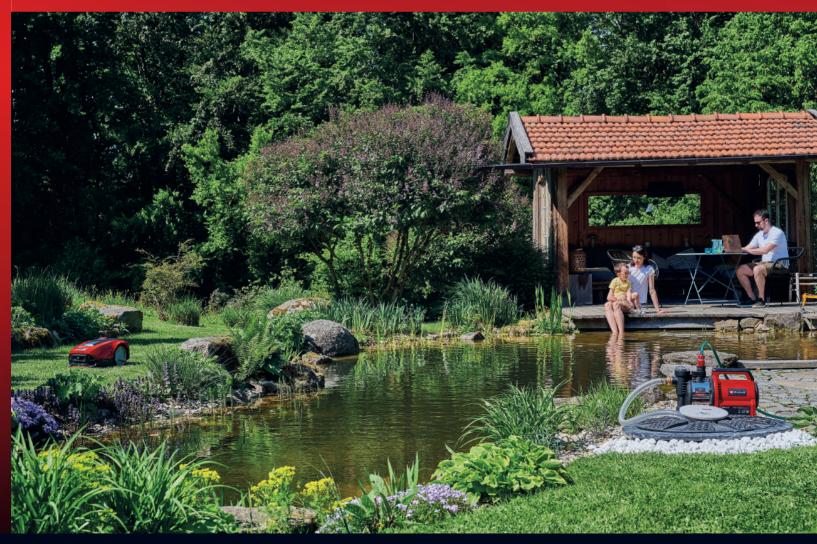





E Einhell

# **PROFESSIONAL CORDLESS LAWN MOWER**

## BRUSHLESS MOTOR

- MULCHING FUNCTION
- INTEGRATED CARRY HANDLE
- HEIGHT-ADJUSTABLE (TELESCOPIC) LONG HANDLE
- FOLDING HANDLEBAR
- GRASS BOX WITH LEVEL INDICATOR
- WIDE WHEELS EXERT LESS STRESS ON THE LAWN

#### **RASARRO 36/42**

PXC battery voltage	2x 18 V		
Battery charging time 18 V / 5.2 Ah	100 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	725 m²		
Cutting width	42 cm		
Cutting height adjustment	6 levels / 25 - 75 mm / central		
Grass box capacity	50		
Wheel diameter front / rear	150 mm / 220 mm		
Housing material	Plastic		
Product weight	17.2 kg		
Incl. 2 batteries (18 V 5.2 Ah Li-Ion) and 1 Twincharger	Article number 3413272 4 006825 669138		

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> <sup>2)</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	350 m <sup>2</sup>	450 m <sup>2</sup>	550 m <sup>2</sup>	725 m <sup>2</sup>	875 m <sup>2</sup>	1100 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required) Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade





E Einhell

# **PROFESSIONAL CORDLESS LAWN MOWER**

## BRUSHLESS MOTOR

- INTEGRATED CARRY HANDLE
- HEIGHT-ADJUSTABLE HANDLEBAR
- FOLDING HANDLEBAR
- GRASS BOX WITH LEVEL INDICATOR
- WIDE WHEELS EXERT LESS STRESS ON THE LAWN

#### **RASARRO 36/40**

PXC battery voltage	2x 18 V		
Battery charging time 18 V / 4.0 Ah	75 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	500 m <sup>2</sup>		
Cutting width	40 cm		
Cutting height adjustment	6 levels / 25 - 75 mm / central		
Grass box capacity	501		
Wheel diameter front / rear	150 mm / 220 mm		
Housing material	Plastic		
Product weight	17.4 kg		
Incl. 2 batteries (18 V 4.0 Ah Li-Ion) and 1 Twincharger	Article number 3413278	4 006825 669121	

**1**) 3.0 Ah 4.0 Ah 1.5 Ah 2.0 Ah 2.5 Ah 5.2 Ah 6.0 Ah >>> <sup>2)</sup> 220 m<sup>2</sup> 280 m<sup>2</sup> 330 m<sup>2</sup> 425 m<sup>2</sup> 500 m<sup>2</sup> 700 m<sup>2</sup> 850 m<sup>2</sup> 1000 m<sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required) Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade

3405454

8.0 Ah





# **PROFESSIONAL CORDLESS LAWN MOWER**

## BRUSHLESS MOTOR

- MULCHING FUNCTION
- INTEGRATED CARRY HANDLE
- HEIGHT-ADJUSTABLE (TELESCOPIC) LONG HANDLE
- FOLDING HANDLEBAR
- GRASS BOX WITH LEVEL INDICATOR
- WIDE WHEELS EXERT LESS STRESS ON THE LAWN

#### **RASARRO 36/38**

PXC battery voltage	2x 18 V				
Battery charging time 18 V / 4.0 Ah	75 min				
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	450 m²				
Cutting width	38 cm				
Cutting height adjustment	6 levels / 25 - 75 mm / central				
Grass box capacity	45				
Wheel diameter front / rear	150 mm / 220 mm				
Housing material	Plastic				
Product weight	15.5 kg				
Incl. 2 batteries (18 V 4.0 Ah Li-Ion) and 1 Twincharger	Article number 3413180 4 006825 635867				

<b>1111)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	250 m <sup>2</sup>	300 m <sup>2</sup>	330 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	700 m <sup>2</sup>	800 m <sup>2</sup>	900 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required) Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

3405486

Spare blade

4 006825 635843





E Einhell

# **PROFESSIONAL CORDLESS LAWN MOWER**

## BRUSHLESS MOTOR

- HEIGHT-ADJUSTABLE HANDLEBAR
- FOLDING HANDLEBAR
- GRASS BOX WITH LEVEL INDICATOR
- INTEGRATED CARRY HANDLE
- WIDE WHEELS EXERT LESS STRESS ON THE LAWN

#### GP-CM 36/41 Li Brushless

PXC battery voltage	2x 18 V				
Cutting width	41 cm				
Cutting height adjustment	6 levels / 25 - 75 mm / central				
Grass box capacity	501				
Wheel diameter front / rear	150 mm / 220 mm				
Housing material	Plastic				
Product weight	15.2 kg				
Article only available without batte- ries / chargers	Article number 3413275 4 006825 652093				

<b>()))</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	220 m <sup>2</sup>	280 m <sup>2</sup>	330 m <sup>2</sup>	425 m <sup>2</sup>	500 m <sup>2</sup>	700 m <sup>2</sup>	850 m <sup>2</sup>	1000 m <sup>2</sup>

ect batteries with at least 2.5 Af

Battery capacity (2x batteries required) Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare	blad	e
-------	------	---

4 006825 651386 3405454





EEinhell

# **PROFESSIONAL CORDLESS LAWN MOWER**

- BRUSHLESS MOTOR
- ECO MODE + BATTERY CHARGE INDICATOR
- MULCHING FUNCTION
- SIDE EJECTOR
- HEIGHT-ADJUSTABLE HANDLEBAR
- FOLDING HANDLEBAR
- GRASS BOX WITH LEVEL INDICATOR
- WIDE WHEELS EXERT LESS STRESS ON THE LAWN
- VARIABLE WHEELDRIVE



#### **GP-CM 36/52 S Li Brushless**

4x 18 V					
100 min					
1200 m <sup>2</sup>					
52 cm					
9 levels / 25 - 80 mm / central					
65 l					
204 mm / 280 mm					
Steel					
29.7 kg					
Article number 3413320	4 006825 671667				
	100 min 1200 m <sup>2</sup> 52 cm 9 levels / 25 - 80 65 l 204 mm / 280 mi Steel 29.7 kg Article number				

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	225 m²	275 m²	315 m²	350 m²	450 m²	600 m <sup>2</sup>	700 m <sup>2</sup>	800 m <sup>2</sup>
<b>3</b> )	450 m²	550 m²	630 m²	700 m <sup>2</sup>	900 m²	1200 m <sup>2</sup>	1400 m <sup>2</sup>	1600 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge with 2 batteries
 Max. lawn area that can be mown per battery charge with 4 batteries (The stated area coverage is based on the assumption of ideal conditions)

Spare blade

3405980

4 006825 672473





# **PROFESSIONAL CORDLESS LAWN MOWER**

- BRUSHLESS MOTOR
- ECO MODE + BATTERY CHARGE INDICATOR
- MULCHING FUNCTION
- SIDE EJECTOR
- HEIGHT-ADJUSTABLE HANDLEBAR
- FOLDING HANDLEBAR
- GRASS BOX WITH LEVEL INDICATOR
- WIDE WHEELS EXERT LESS STRESS ON THE LAWN
- VARIABLE WHEELDRIVE



# **GP-CM 36/47 S Li Brushless**

PXC battery voltage	4x 18 V				
Battery charging time 18 V / 4.0 Ah	75 min				
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	700 m²				
Cutting width	47 cm				
Cutting height adjustment	9 levels / 25 - 80 mm / central				
Grass box capacity	65 l				
Wheel diameter front / rear	204 mm / 280 mm				
Housing material	Steel				
Product weight	29.6 kg				
Incl. 4 batteries (18 V 4.0 Ah Li-Ion) and 2 Twinchargers	Article number 3413310	4 006825 671650			

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> <sup>2)</sup>	125 m²	175 m²	215 m²	250 m²	350 m²	500 m <sup>2</sup>	600 m <sup>2</sup>	700 m <sup>2</sup>
<b>3</b> )	250 m²	350 m²	430 m²	500 m²	700 m <sup>2</sup>	1000 m <sup>2</sup>	1200 m <sup>2</sup>	1400 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

<sup>10</sup> Battery capacity (2x batteries required)
 <sup>20</sup> Max. lawn area that can be mown per battery charge with 2 batteries
 <sup>30</sup> Max. lawn area that can be mown per battery charge with 4 batteries (The stated area coverage is based on the assumption of ideal conditions)

Spare blade

3405970





Sinhell

# **PROFESSIONAL CORDLESS LAWN MOWER**

BRUSHLESS MOTOR MULCHING FUNCTION SIDE EJECTOR HEIGHT-ADJUSTABLE HANDLEBAR FOLDING HANDLEBAR GRASS BOX WITH LEVEL INDICATOR WIDE WHEELS EXERT LESS STRESS ON THE LAWN VARIABLE WHEELDRIVE



PXC battery voltage	4x 18 V			
Battery charging time 18 V / 4.0 Ah	75 min			
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	700 m²			
Cutting width	47 cm			
Cutting height adjustment	6 levels / 30 - 65 mm / central			
Grass box capacity	75			
Wheel diameter front / rear	200 mm / 280 mm			
Housing material	Steel			
Product weight	31.0 kg			
Cleaning tool	•			
Incl. 4 batteries (18 V 4.0 Ah Li-Ion) and 2 Twinchargers	Article number 3413200 4 006825 639506			

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	125 m²	175 m <sup>2</sup>	215 m <sup>2</sup>	250 m <sup>2</sup>	350 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	700 m <sup>2</sup>
<b>3</b> )	250 m <sup>2</sup>	350 m <sup>2</sup>	430 m <sup>2</sup>	500 m <sup>2</sup>	700 m <sup>2</sup>	1000 m <sup>2</sup>	1200 m <sup>2</sup>	1400 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge with 2 batteries
 Max. lawn area that can be mown per battery charge with 4 batteries (The stated area coverage is based on the assumption of ideal conditions)

Spare blade

3405455

VORTEXDE





# **PROFESSIONAL CORDLESS TILLER**

- BRUSHLESS MOTOR
- HEIGHT-ADJUSTABLE WHEELS FOR EASY TRANSPORTATION
- RUGGED METAL BLADES
- ELECTRONIC SPEED CONTROL
- FOLDING HANDLEBAR
- BRAKE SHOE
- BLADE CHANGE WITHOUT TOOLS
- TWO-HAND SAFETY SWITCH
- LED BATTERY CHARGE INDICATOR
- OPERATION WITH FOUR OR SIX BLADES



PXC battery voltage	4x 18 V
Working width	30 - 45 cm
Working depth	230 mm
Number of blades	4 - 6 pcs
Cultivator blade diameter	245 mm
Housing material	Metal
Product weight	23.8 kg
Article only available without batte- ries / chargers	Article number 3431220 4 006825 675108

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> <sup>2)</sup>	6-8 min	8-10 min	10-13 min	13-16 min	16-20 min	22-28 min	24-32 min	32-40 min
<b>3</b> )	12-16 min	16-20 min	20-26 min	26-32 min	32-40 min	44-56 min	48-64 min	64-80 min

- For best performance select batteries with at least 4.0 Ah
  <sup>1)</sup> Battery capacity (2x batteries required)
  <sup>2)</sup> Max. operating time per battery charge with 2 identical batteries (The stated area coverage is based
  on the assumption of ideal conditions)
  <sup>3)</sup> Max. operating time per battery charge with 4 identical batteries (The stated area coverage is based
  on the assumption of ideal conditions)



# **PROFESSIONAL CORDLESS SNOW THROWER**



### **GP-ST 36/53 Li E Brushless**

PXC battery voltage	2x 18 V	
Working width	53 cm	
Max. snow height	33 cm	
Throwing distance max.	8 m	
Housing material	Plastic	
Product weight	20.4 kg	
Article only available without batte- ries / chargers	Article number 3417021	4 006825 684032

<b>1111)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	5 min	6 min	7 min	10 min	12 min	15 min	20 min	24 min
<b>3</b> )	10 min	12 min	14 min	20 min	24 min	30 min	40 min	48 min

For best performance select batteries with at least 4.0 Ah

Battery capacity (2x batteries required)
 Max. operating time per battery charge with 2 identical batteries (The stated area coverage is based on the assumption of ideal conditions)
 Max. operating time per battery charge with 4 identical batteries (The stated area coverage is based on the assumption of ideal conditions)





# **PROFESSIONAL CORDLESS EARTH AUGER**

# BRUSHLESS MOTOR

- DRILL BIT CHANGE WITHOUT TOOLS
- METAL FRAME
- CLOCKWISE / COUNTER-CLOCKWISE OPERATION
- SOFT GRIP



PXC battery voltage	18 V					
Drilling diameter		150	mm			
Drill bit length	800	mm				
Speed	125 min <sup>-1</sup>					
Product weight	6.0 kg					
Article only available without ries / chargers	Article number 3437000 4 006825 659023					
1) 1EAb 20Ab 20	: Ab   20	Ab	40.4h	EDAh	6 0 Ab	0 0 Ab

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>>> <sup>2)</sup>	10 pcs	15 pcs	20 pcs	30 pcs	40 pcs	50 pcs	60 pcs	80 pcs
For hest performance select a batten/with at least 2.5 Ab								

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. number of drill holes (depth 40 cm, mixed soil) per battery charge





# **CORDLESS EARTH AUGERS ACCESSORIES**

### Earth Auger 200 mm

Suitable for	GP-EA 18/150 Li Brushless
Article number	3437022
EAN	4 006825 682960



### Earth Auger 120 mm

Suitable for	GP-EA 18/150 Li Brushless
Article number	3437010
EAN	4 006825 659030

### Extension

Suitable for	GP-EA 18/150 Li Brushless
Article number	3437012
EAN	4 006825 659054





# **PROFESSIONAL CORDLESS SCYTHE**

NEW

- BRUSHLESS MOTOR
- 2-STEP ELECTRONIC SPEED CONTROL
- BATTERY CAPACITY INDICATOR
- SPINDLE LOCK
- SPLIT SHAFT
- DOUBLE THREAD SPOOL
- ADJUSTABLE HANDLE
- BATTERY PROTECTION BAR
- WALL BRACKET

## GP-BC 36/430 Li Brushless

PXC battery voltage	2x 18 V				
Cutting width (blade)	25.5 cm				
Cutting width (thread)	43 cm				
Thread diameter	2.0 mm				
Thread length	6 m				
Product weight	6.8 kg				
Double thread spool	•				
3-tooth blade	•				
Carrying strap	Backpack carrying strap				
Article only available without batte- ries / chargers	Article number 3411340 4 006825 679571				

<b>1)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> <sup>2)</sup>	18-30	22-36	28-45	34-55	42-70	55-95	68-110	90-140
	min							
<b>3</b> )	12-18	14-22	18-28	22-34	28-45	36-60	45-68	56-86
	min							

For best performance select batteries with at least 2.5 Ah

- b) see performance select batteries with at least 2.5 Ah
   b) Battery capacity (2x batteries required)
   b) Max. operating time per battery charge with blade in idle mode (dependent on the selected speed)
   b) Max. operating time per battery charge with thread spool in idle mode (dependent on the selected speed)

3405103 Spare double thread spool, thread Ø 2.0 mm

006825 679755







# **PROFESSIONAL CORDLESS SCYTHE**

- BRUSHLESS MOTOR
- 2-STEP ELECTRONIC SPEED CONTROL
- SPINDLE LOCK
- SPLIT SHAFT
- DOUBLE THREAD SPOOL
- ADJUSTABLE HANDLE
- BATTERY PROTECTION BAR
- WALL BRACKET

### GP-BC 36/430 Li P Brushless

PXC battery voltage	2x 18 V				
Cutting width (blade)	25.5 cm				
Cutting width (thread)	43 cm				
Thread diameter	2.0 mm				
Thread length	6 m				
Product weight	6.2 kg				
Double thread spool	•				
3-tooth blade	•				
Carrying strap	One-shoulder harness				
Article only available without batte- ries / chargers	Article number 3411345	4 006825 679588			

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;&gt;</b> <sup>2)</sup>	18-30	22-36	28-45	34-55	42-70	55-95	68-110	90-140
	min							
<b>3</b> )	12-18	14-22	18-28	22-34	28-45	36-60	45-68	60-86
	min							

For best performance select batteries with at least 2.5 Ah

<sup>10</sup> Battery capacity (2x batteries required)
 <sup>21</sup> Max. operating time per battery charge with blade in idle mode (dependent on the selected speed)
 <sup>32</sup> Max. operating time per battery charge with thread spool in idle mode (dependent on the selected speed)

3405103 Spare double thread spool, thread Ø 2.0 mm

4 006825 679755

### **Cordless Scythes Accessories**

Special Grass Blade 230	Article number 3436660	4 006825 637953
Thicket Blade 255	Article number 3405082	4 006825 632774
Thicket Blade 200	Article number 3405083	4 006825 651454
Grass Blade 255	Article number 3404996	4 006825 607239
Grass Blade 230	Article number 3436661	4 006825 637960







# **PROFESSIONAL CORDLESS LAWN TRIMMER**







# **PROFESSIONAL CORDLESS HEDGE TRIMMER**

- ANTI-BLOCKING SYSTEM
- 2-STEP SPEED REGULATION
- TURNABLE REAR HANDLE
- **SWITCHES ERGONOMIC FRONT HANDLE THANKS TO MICRO**

- CUTTING COLLECTOR
- LASER-CUT AND DIAMOND-GROUND BLADES
- METAL GEAR BOX
- SOFT GRIP
- ALUMINIUM COVER OVER CUTTERS

### **GP-CH 18/61 Li Brushless**

PXC battery voltage	18 V		
Bar length	670 mm		
Cutting length	610 mm		
Spacing between teeth	26 mm		
Product weight	2.7 kg		
Protective cover with wall mount	•		
Article only available without battery / charger	Article number 3410935	4 006825 673623	

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	29.5 min	39 min	49 min	59 min	78 min	102 min	118 min	156 min
<b>3</b> )	20 min	27 min	33 min	40 min	53 min	69 min	80 min	106 min

Battery capacity

<sup>2)</sup> Max. operating time in ECO mode per battery charge
 <sup>3)</sup> Max. operating time in BOOST mode per battery charge





# **PROFESSIONAL CORDLESS HEDGE TRIMMER**



SWITCHES

CUTTING COLLECTOR

LASER-CUT AND DIAMOND-GROUND BLADES

R

METAL GEAR BOX

SOFT GRIP

ALUMINIUM COVER OVER CUTTERS

# **GP-CH 18/50 Li Brushless**

PXC battery voltage						V				
Bar length						) mm				
Cutting leng	th				500	) mm				
Spacing between teeth					20	mm				
Product wei	ght				2.5 kg					
Protective co	ovei	r with wa	ll mount		•					
Article only available without battery / charger						icle numb 0950	ber	4 006825	679748	
1.5 /	Ah	2.0 Ah	2.5 Ah	3.0 Ah		4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah	

NEW

<b>IIII</b> <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	29.5 min	39 min	49 min	59 min	78 min	102 min	118 min	156 min
<b>3)</b>	20 min	27 min	33 min	40 min	53 min	69 min	80 min	106 min

Battery capacity Max. operating time in ECO mode per battery charge Max. operating time in BOOST mode per battery charge





# **PROFESSIONAL CORDLESS MULTIFUNCTIONAL TOOL**

- CONTINUOUSLY ADJUSTABLE TELESCOPIC ALUMINIUM
- OREGON QUALITY BAR AND CHAIN
- AUTOMATIC CHAIN LUBRICATION
- LASER-CUT AND DIAMOND-GROUND BLADES
- ANTI-BLOCKING SYSTEM
- MOTOR HEAD TILTABLE BY MULTIPLE SETTINGS
- METAL GEAR BOX
- ADDITIONAL HOLDING AREA





NEW

### GP-HC 18/5020 Li T Brushless

PXC battery voltage					18	V			
Bar len	gth (chai	nsaw)			200	mm			
Chain c	utting sp	eed			7 m	/sec			
Blade l	ength of	hedge tri	immer		500	mm			
	Spacing between teeth (hedge trimmer)					25 mm			
Max. working height				4.0 m (pruner) / 3.5 m (hedge trimmer)					
Produc	t weight				5.9 kg (incl. all attachments)				
Article only available without battery / charger						cle numb 0970	ber	4 006825	681093
<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2)</b>	15 min	20 min	25 min	30	min	40 min	52 min	60 min	80 min
<b>3</b> )	27 pcs	39 pcs	54 pcs	73	pcs	99 pcs	127 pcs	148 pcs	198 pcs

For best performance select batteries with at least 3.0 Ah

<sup>10</sup> Battery capacity
 <sup>20</sup> Max. operating time per battery charge – hedge trimmer

Max. cuts through 70 x 70 mm square timber per battery charge (pole-mounted pruner)

Spare chain 20cm 1,1 33T 3/8	4500193	4 006825 664577
Spare bar	4500117	4 006825 569100





# **PROFESSIONAL CORDLESS POLE-MOUNTED PRUNER**

- CONTINUOUSLY ADJUSTABLE TELESCOPIC ALUMINIUM HANDLE
- OREGON QUALITY BAR AND CHAIN
- AUTOMATIC CHAIN LUBRICATION
- CLAW STOP
- METAL GEAR BOX
- ADDITIONAL HOLDING AREA



### **GP-LC 18/20 Li T Brushless**

NEW

PXC battery vo	18 \	V								
Bar length	200 mm									
Cutting length					mm					
Cutting speed					7 m/s					
Max. working height					4.0 m					
Product weigh	Product weight					3.7 kg				
Article only ava / charger	available without battery				cle numł 0971	ber	4 006825	681871		
1.5 Ah	2.0 Ah	2.5 Ah	3.0	) Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah		

**27** pcs 39 pcs 54 pcs 73 pcs 99 pcs 127 pcs 148 pcs 198 pcs

 $^{9}$  Battery capacity  $^{20}$  Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 20cm 1,1 33T 3/8	4500193	4 006825 664577
Spare bar	4500117	4 006825 569100





# **PROFESSIONAL CORDLESS TELESCOPIC HEDGE TRIMMER**

- CONTINUOUSLY ADJUSTABLE TELESCOPIC ALUMINIUM HANDLE
- MOTOR HEAD TILTABLE BY MULTIPLE SETTINGS
- LASER-CUT AND DIAMOND-GROUND BLADES
- ANTI-BLOCKING SYSTEM
- METAL GEAR BOX
- ADDITIONAL HOLDING AREA



PXC battery voltage					18 V						
Bar length						) mm					
Cutting length					500	) mm					
Spacing between teeth					25	mm					
Max. working height					3.5	m					
Prod	Product weight					4.2 kg					
Articl / cha		vailable without battery				icle numb 0972	oer		4 006825	681888	
<b>IIII)</b> <sup>1</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0	) Ah	4.0 Ah	5.2 A	h	6.0 Ah	8.0 Ah	
<b>xxx</b> <sup>2</sup>	15 min	20 min	25 min	30	min	40 min	52 m	in	60 min	80 min	

NEW

Battery capacity Max. operating time per battery charge – hedge trimmer



# **HEDGE TRIMMERS** ACCESSORIES

# Maintenance Spray

Suitable for	Hedge trimmers, grass and shrub shears
Article number	3403099
EAN	4 006825 654608





# **PROFESSIONAL CORDLESS CHAINSAW**

# BRUSHLESS MOTOR

OREGON QUALITY BAR AND CHAIN

- TOOLLESS CHAIN TENSIONING AND CHANGING
- AUTOMATIC CHAIN LUBRICATION
- STURDY STOP CLAWS MADE OF METAL
- KICKBACK PROTECTION WITH MECHANICAL INSTANT CHAIN BRAKE
- CHAIN CATCH BOLT
- SOFT GRIP
- LARGE OIL FILLER OPENING



### GP-LC 36/40 Li Brushless

PXC battery voltage	2x 18 V	
Petrol equivalence class	up to 3.0 hp	
Bar length	400 mm	
Cutting length	380 mm	
Cutting speed	19 m/s	
Oil tank capacity	230 ml	
Product weight	4.7 kg	
Protective cover	•	
Article only available without batte- ries / chargers	Article number 4600050	4 006825 678406

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;&gt;</b> <sup>2)</sup>	81 pcs	108 pcs	134 pcs	159 pcs	212 pcs	276 pcs	319 pcs	425 pcs

For best performance select batteries with at least 5.2 Ah

Battery capacity (2x batteries required) Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 40cm 1.3 56T 3/8	4500367	4 006825 681857
Spare bar 40cm 1,3	4500156	4 006825 548778





# **PROFESSIONAL CORDLESS CHAINSAW**

- BRUSHLESS MOTOR
- OREGON QUALITY BAR AND CHAIN
- TOOLLESS CHAIN TENSIONING AND CHANGING
- AUTOMATIC CHAIN LUBRICATION
- STURDY STOP CLAWS MADE OF METAL
- KICKBACK PROTECTION WITH MECHANICAL INSTANT CHAIN BRAKE
- CHAIN CATCH BOLT
- SOFT GRIP
- LARGE OIL FILLER OPENING



### GP-LC 36/35 Li Brushless

PXC battery voltage	2x 18 V	
Petrol equivalence class	up to 2.5 hp	
Bar length	350 mm	
Cutting length	330 mm	
Cutting speed	15 m/s	
Oil tank capacity	115 ml	
Product weight	4.0 kg	
Protective cover	•	
Article only available without batte- ries / chargers	Article number 4501780	4 006825 631920

<b>1</b> )			2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah		8.0 Ah
<b>&gt;&gt;&gt;&gt;</b> <sup>2)</sup>	120 pcs	160 pcs	200 pcs	240 pcs	320 pcs	420 pcs	480 pcs	640 pcs

For best performance select batteries with at least 3.0 Ah

Battery capacity (2x batteries required)
 Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 35cm 1,1 52T 3/8	4500196	4 006825 632231
Spare bar 35cm 1,1	4500197	4 006825 632248





# **PROFESSIONAL TOP-HANDLED CORDLESS CHAINSAW**

E Einhell

- BRUSHLESS MOTOR
- OREGON QUALITY BAR AND CHAIN
- TOOLLESS CHAIN TENSIONING AND CHANGING
- AUTOMATIC CHAIN LUBRICATION
- STURDY STOP CLAWS MADE OF METAL
- KICKBACK PROTECTION WITH MECHANICAL INSTANT CHAIN BRAKE
- CHAIN CATCH BOLT
- ERGONOMIC HANDLE WITH SOFT GRIP
- LARGE OIL FILLER OPENING
- TIP GUARD



### FORTEXXA 18/20 TH

1 E hn
1.5 hp
nm
nm
5
5
e number 4 006825 663099

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> <sup>2)</sup>	60 pcs	80 pcs	100 pcs	120 pcs	160 pcs	210 pcs	240 pcs	320 pcs

For best performance select a battery with at least 2.5 Ah

Battery capacity Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 20cm 1,1 33T 3/8	4500193	4 006825 664577
Spare bar 20cm 1,2	4500194	4 006825 664560

WARNING:This chainsaw may only be used by trained tree careworkers. Misactions in compliance with safety instructions may cause serious injuries.

Einhell



# **WOODWORKING ACCESSORIES**

### Forest Safety Helmet

Head circumference	52-66 cm				
Product weight	0.7 kg				
Article number	4500480				
EAN	4 006825 544565				





# **PROFESSIONAL CORDLESS PRUNING CHAINSAW**



# GP-PS 18/20 Li Brushless

PXC battery voltage					18	V				
Bar length						192 mm				
Cutting length					150 mm					
Cutting speed				8 m/s						
Oil tank capacity				70 ml						
Produc	Product weight					1.2 kg				
Protect	ive cover	r			•					
Article only available without battery / charger			Article number         4600080         4 006825 6832				683295			
<b>1</b> )	1.5 Ah	2.0 Ah 2.5 Ah 3.0			) Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah	

	1.5741	2.0711	2.5741	5.0741	-T.0711	J.Z / 11	0.0711	0.0711
<b>&gt;&gt;&gt;</b> <sup>2)</sup>	100 pcs	134 pcs	168 pcs	201 pcs	268 pcs	348 pcs	402 pcs	536 pcs
For best performance colort batteries with at least 2.0 Ab								

Battery capacity Max. cuts per battery charge through soft roundwood (ø 50 mm)

Spare chain 20cm 1,1 32T 7,62	4501746	4 006825 685060
Spare bar 20cm 1,1 SP6	4501755	4 006825 685053

# **WOODWORKING ACCESSORIES**



Chainsaw Trestle						
Profile thickness	1.9 mm					
Maximum load capacity	150 kg					
For tree trunks up to a diameter of	approx. 30 cm					
Product weight	7.1 kg					
Article number	4500067					
EAN	4 006825 548693					

### **Chainsaw Trestle 2.5**

1	Profile thickness	2.5 mm		
	Maximum load capacity	200 kg		
2	For tree trunks up to a diameter of	approx. 30 cm		
1	Product weight	8.9 kg		
	Article number	4500690		
	EAN	4 006825 678826		



NEW

Autumn 2025

# **PROFESSIONAL CORDLESS LEAF BLOWER**

- BRUSHLESS MOTOR
- AXIAL FAN TECHNOLOGY
- TURBO FUNCTION
- ELECTRONIC SPEED CONTROL WITH LED INDICATION
- ANGLE-ADJUSTABLE BLOWER HEAD
- BALANCE HANDLE WITH SOFT GRIP
- DUAL OPERATING MODE WITH ADDITIONAL NOZZLE ATTACHMENT
- SOFT GRIP

# GP-LB 36/270 Li E Brushless

PXC battery voltage	2x 18 V				
Max. blow velocity	270 km/h				
Max. blowing air flow	1100 m³/h				
Idle speed	10000 - 22300 min <sup>-1</sup>				
Product weight	2.2 kg				
Article only available without batte- ries / chargers	Article number 3433570 4 006825 683387				

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
»»» <sup>2)</sup>	4-21 min	6-26 min	9-33 min	11-41 min	12-52 min	18-69 min	23-81 min	25-104 min
<b>3</b> )	3 min	5 min	6 min	8 min	10 min	13 min	16 min	19 min

For best performance select a battery with at least 3.0 Ah <sup>1)</sup> Battery capacity (2x batteries required) <sup>2)</sup> Max. operating time per battery charge in idle mode – dependent on the selected speed <sup>3)</sup> Max. operating time per battery charge in idle mode in TURBO mode





# **PROFESSIONAL CORDLESS LEAF BLOWER**

- BRUSHLESS MOTOR
- TUBE LENGTH ADJUSTABLE WITHOUT TOOLS (3 LEVELS)
- TURBO FUNCTION
- ELECTRONIC SPEED CONTROL
- RUGGED METAL RING FOR REMOVING WET LEAVES
- INTEGRATED WALL MOUNT
- BALANCE HANDLE WITH SOFT GRIP
- INCL. CARRYING STRAP

### GP-LB 36/230 Li E Brushless

DVG						10.11				
PXC battery voltage			2X '	18 V						
Max. blow velocity			230	km/h						
Max. blowing air flow			890	m³/h						
Idle speed			100	00 - 2230	)0 mi	n <sup>-1</sup>				
Product weight			2.3	kg						
Article only available without batte-		Article number								
ries / cl	ries / chargers			Article number 3433650 4 006825 682168						
<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0	Ah	4.0 Ah	5.2	Ah	6.0 Ah	8.0 Ah
2)	7 40 min	10-55	11-63	11-63 16-92		20-116	26-1	38	30-165	40-232
<b>&gt;&gt;&gt;</b> -'	7-40 min	min	min	min		min	mi	n	min	min
<b>3</b> )	3 min	4 min	5 min	n 8 min		10 min	12 n	nin	13 min	17 min

NEW

For best performance select a battery with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. operating time per battery charge in idle mode – dependent on the selected speed
 Max. operating time per battery charge in idle mode in TURBO mode



# **PROFESSIONAL CORDLESS LEAF BLOWER**

# BRUSHLESS MOTOR

- AXIAL FAN TECHNOLOGY
- TURBO FUNCTION
- ELECTRONIC SPEED CONTROL WITH LED INDICATION
- BALANCE HANDLE WITH SOFT GRIP
- GUTTER CLEANING SET (only GP-LB 18/200 Li GK Brushless)

### GP-LB 18/200 Li GK Brushless // GP-LB 18/200 Li E Brushless

PXC battery voltage	18 V				
Max. blow velocity	200 km/h				
Max. blowing air flow	670 m³/h				
Idle speed	13000 - 18000 min <sup>-1</sup>				
Product weight	2.2 kg				
Article incl. gutter cleaning set, without battery / charger (GP-LB 18/200 Li GK Brushless)	Article number 34.335.50	4 006825 658965			
Article without gutter cleaning set, without battery / charger (GP-LB 18/200 Li E Brushless)	Article number 34.335.55	4 006825 660616			

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	1-11 min	5-13 min	8-15 min	10-21 min	15-27 min	18-33 min	20-37 min	30-54 min
<b>3</b> )	-	-	3 min	5 min	6 min	10 min	12 min	15 min

For best performance select a battery with at least 3.0 Ah

<sup>1)</sup> Battery capacity
 <sup>2)</sup> Max. operating time per battery charge in idle mode – dependent on the selected speed
 <sup>3)</sup> Max. operating time per battery charge in idle mode in TURBO mode

# CORDLESS LEAF BLOWERS ACCESSORIES

### . Cot Eni

	$\frown$	Gu
) /// }		Su
		Ar
		ΕA

dutter ciculing set, s piece					
Suitable for	GP-LB 18/200 Li GK Brush- less and GP-LB 18/200 Li E Brushless				
Article number	3433559				
EAN	4 006825 660906				



# **PROFESSIONAL CORDLESS LEAF VACUUM**



- BRUSHLESS MOTOR
- TOOLLESS CHANGEOVER FROM BLOWER AND SUCTION
- TURBO FUNCTION
- ELECTRONIC SPEED CONTROL WITH LED INDICATION
- ADDITIONAL HANDLE
- CLEANING OPENING WITH SAFETEY SWITCH
- HEIGHT-ADJUSTABLE GUIDING WHEELS
- **W** QUALITY COLLECTION BAG WITH VIEWING WINDOW FOR CHECKING THE FILLING LEVEL
- SHREDDING WHEEL WITH CLEANING OPENING
- SOFT GRIP
- INCL. CARRYING STRAP



### **VENTURRO 36/240**

PXC battery voltage	2x 18 V
Max. blow velocity	240 km/h
Max. suction power	740 m³/h
Idle speed	8000 - 15000 min <sup>-1</sup>
Shredding function	10:1
Debris bag volume	45
Product weight	3.6 kg
Article only available without batte- ries / chargers	Article number 3433640 4 006825 665451

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	7-17 min	9-23 min	10-27 min	14-35 min	17-46 min	21-56 min	27-70 min	34-92 min
3)	4 min	5 min	6 min	8 min	10 min	13 min	16 min	20 min
<b>333</b> <sup>4)</sup>	7-19 min	9-25 min	10-28 min	14-37 min	18-49 min	21-58 min	28-74 min	36-98 min
5)	/ min	5 min	6 min	8 min	10 min	13 min	16 min	20 min

- For best performance select a battery with at least 2.5 Ah <sup>1)</sup> Battery capacity (2x batteries required) <sup>2)</sup> Max. operating time per battery charge in idle mode (vacuuming mode) dependent on the selected
- speed <sup>3)</sup> Max. operating time per battery charge in idle mode (TURBO vacuuming mode) <sup>4)</sup> Max. operating time per battery charge in idle mode (blowing mode) dependent on the selected speed <sup>5)</sup> Max. operating time per battery charge in idle mode (TURBO blowing mode)





# **PROFESSIONAL CORDLESS PRUNING SHEARS**



2-IN-1: CONVENIENT PRUNING SCISSORS AND TELESCO-PIC SCISSORS

Record

- ADJUSTABLE BLADE ANGLE (14/28 MM)
- SWIVELLING TELESCOPIC HANDLE
- BYPASS BLADES MADE FROM SK5 STEEL
- BELT CLIP
- METAL HOOK
- STURDY PLASTIC COVER

### **GP-LS 18/28 Li T Brushless**

PXC battery voltage	18 V	
Min. branch diameter	14 mm	
Max. branch diameter	28 mm	
Max. working height	3.8 m	
Product weight	1.9 kg	
Article only available without battery / charger	Article number 3408330	4 006825 679168

<b>1</b> )	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> <sup>2)</sup>	1080 pcs	1450 pcs	1830 pcs	2175 pcs	2900 pcs	3860 pcs	4350 pcs	5800 pcs

<sup>1)</sup> Battery capacity <sup>2)</sup> Max. cuts per battery charge through round dry beech wood (ø 15 mm)





# **PROFESSIONAL CORDLESS PRUNING SHEARS**

2000

- BRUSHLESS MOTOR
- ADJUSTABLE BLADE ANGLE (14/28 MM)
- BYPASS BLADES MADE FROM SK5 STEEL
- BELT CLIP
- STURDY PLASTIC COVER

### **GP-LS 18/28 Li Brushless**

PXC battery voltage				18 V					
Min. branch diameter				14 mm					
Max. branch diameter				28 mm					
Product weight					0.8 kg				
Article only available without battery / charger			ery	Article number 3408320 4 006825 679175					
1)	1.5 Ah 2.0 Ah 2.5 Ah 3.0			Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah	
<b>2</b> )	1080 pcs	1450 pcs	1830 pcs	2175	5 pcs	2900 pcs	3860 pc	s 4350 pcs	5800 pcs

<sup>1)</sup> Battery capacity <sup>2)</sup> Max. cuts per battery charge through round dry beech wood (ø 15 mm)





# **ACCESSORIES – BATTERIES**

### 4.0 Ah SEALED Power X-Change Plus Battery

4.0 AII SEALED I OWCI	X change i las battery
Items supplied	1 battery
PXC battery voltage	18 V / 4.0 Ah
Battery power	max. 900 W
Product weight	0.58 kg
Article number	4511627
EAN	4 006825 673227

### 3.0 Ah SEALED Power X-Change Plus Battery



Items supplied	1 battery
PXC battery voltage	18 V / 3.0 Ah
Battery power	max. 900 W
Product weight	0.57 kg
Article number	4511618
EAN	4 006825 672794







# SEALED TECHNOLOGY. NO CHANCE FOR DUST AND WATER.

Officially tested to IP57 protection class.\*

# WHAT DOES IP57 MEAN?

P

DUST 5

Protected from all types of foreign bodies and dust – be it wood, brick or metal.



\* Protection according to IP57 applies to the battery itself. It does not apply to tools operated with the battery.

Protected from high pressure water spray and temporary sub-

**7 WATER** 



In addition to the sealed housing there is a sensor controlled safety cut out to prevent short circuiting under water. After the contacts have been dried, the battery is ready for use again.







# **PLUS TECHNOLOGY**

By switching to the new "21700" cell format (21 mm diameter, 70.0 mm length) our latest Power X-Change batteries have acquired the best combination of power/running time and weight.

Why? Using this cell technology it is possible to achieve the same power and running time with five cells instead of the previous ten.

Benefits? The new batteries are 12 % lighter and 13 % more compact than their predecessors – at 100 % power and running time.

Results: Light-weight all-rounders energy-intensive applications such as in cordless chainsaws.





# **MULTI-AH TECHNOLOGY**

Thanks to MULTI-Ah technology, switching over from a 5.0 Ah battery to a 8.0 Ah battery is really easy and can be done with just the push of a button.

The 5.0 Ah battery has a 3x longer total service life and is suitable for lighter applications (e.g. cordless lamps or cordless screwdrivers). The 8.0 Ah battery offers the maximum running time for more capacity-intensive applications (e.g. cordless lawn mowers or cordless wet and dry vacuum cleaners).





# ONE BATTERY FOR ALL DEVICES – TWIN-PACK TECHNOLOGY

Every Power X-Change battery from Einhell has a voltage of 18 V. If more power is required for more powerful tools, **two 18 V batteries are simply combined in one 36 V device** thanks to Twin-Pack technology. Doubling the voltage automatically doubles the power.

Double Twin-Pack technology allows you to work even longer without recharging. This uses four batteries. If the first two batteries are empty, the system automatically switches to the two additional batteries.





# **ACCESSORIES – BATTERIES**

### One battery for all devices

Our rechargeable batteries are not only available individually (solo item), but also in a Twin Pack. To get started in the Einhell world, we recommend choosing a Starter Kit (battery + charger)



	Less weight	and size	PXC Ba	tteries	More power a	nd runtime
	<b>()</b>		NEW	<b>1</b>	6	
	4.0 Ah	4.0 Ah PLUS	4.0 Ah SEALED	5.2 Ah	4-6 Multi-Ah	5-8 Multi-Ah
Solo (1 battery)	4511396	4511553	4511627	4511437	4511502	4511600
EAN	4 006825 610376	4 006825 660869	4 006825 673227	4 006825 616606	4 006825 644210	4 006825"665055"
Power	max. 900 W	max. 900 W	max. 900 W	max. 1260 W	max. 1350 W	max. 1350 W
Weight	670 g	595 g	605 g	890 g	1020 g	1050 g
Features						
PLUS – Extra Power		$\checkmark$	$\checkmark$	$\checkmark$	$\checkmark$	$\checkmark$
SEALED			$\checkmark$			
Multi-Ah					$\checkmark$	$\checkmark$

			-	
	3.0 Ah PLUS	4.0 Ah	4.0 Ah PLUS	5.2 Ah
Twin-Pack (2 batteries)	4511631	4511489	4511629	4511526
EAN	4 006825 673692	4 006825 638578	4 006825 673685	4 006825 656695





# **ACCESSORIES – STARTER KITS**

### Getting started is easy - with the Einhell Power X-Change Starter Kit

Technical data and features at a glance:

	2.5 Ah	4.0 Ah	4.0 Ah PLUS	5.2 Ah	4-6 Multi-Ah
Article number (1 battery + 1 charger)	4512097	4512042	4512159	4512114	4512143
EAN	4 006825 646962	4 006825 613704		4 006825 656787	4 006825 667653
Article number (2 batteries + 1 Twincharger)	-	4512112	-	-	-
EAN	-	4 006825 655766	-	-	-
<b>Charger</b> (More information in the charger table)	3 A Charger	3 A Charger / 3 A Twincharger	3 A Charger	3 A Charger	6 A Boostcharger
Ready to go	50 min	75 min	75 min	80 min	60 min

# **ACCESSORIES – CHARGERS**

# One charger for all batteries – 100% compatibility

	3 A Charger	3 A Carcharger	4 A Fastcharger	6 A Boostcharger	8 A Boostcharger
Article number	Only available in Starter Kits	4512113	4512103	Only available in Starter Kits	4512155
EAN	-	4 006825 655377	4 006825 650228	-	4 006825 670554
Charging current	3 A	3 A	4 A	6 A	8 A
Number of ports for PXC batteries	1	1	1	1	1

		NEW			
	3 A Twincharger	4 A Twincharger	4 A Quattrocharger		
Article number	4512069	4512161	4512102		
EAN	4 006825 629729		4 006825 649536		
Charging current	3 A (per port)	4 A (per port)	4 A (per port) (parallel charging of 2x2 batteries)		
Number of ports for PXC batteries	2	2	4		



đ



Endless extendable
 Tongue and groove connection
 Snap-in function for secure fastening



>> Protects the battery against dust and moisture

# PXC ACCESSORIES

### **Battery Mounting Gadget**

Items supplied	2 battery mounting gadgets, 4 screws, 4 dowels				
Suitable for (batteries)	all 18 V Power X-Change batteries				
Special feature	The batteries latch in place and are secure in every position				
Article number	4514155	4 006825 658774			

# **PXC ACCESSORIES**

### **Battery Protector** ltems supplied Suitable for (batteries) 1 battery cover all 18 V Power X-Change batteries HYPRESSO 18/24, TE-DA 18/760 Li, Can be used for (devices) GE-WS 18/10 Li Protects the battery against dust and Special feature 4 006825 670844 Article number 4140151

# **BATTERY CHARGING TIME TABLE**

	1,5 Ah	2,0 Ah	2,5 Ah	3,0 Ah	4,0 Ah	5,2 Ah	6,0 Ah	8,0 Ah	
Power X-Charger 3 A Power X-Twincharger 3 A (parallel charging of 2 batteries) Power X-Car Charger 3 A	30 min	40 min	50 min	60 min	75 min	100 min	120 min	160 min	Shorter charging time
Power X-Twincharger 4 A Power X-Fastcharger 4 A 2x2 Power X-Quattrocharger 4 A (parallel charging of 2 batteries)	24 min	30 min	37 min	45 min	60 min	80 min	90 min	120 min	-25%
Power X-Boostcharger 6 A *	24 min	30 min	27 min	32 min	40 min	50 min	60 min	80 min	-50%
Power X-Boostcharger 8 A **	24 min	30 min	27 min	32 min	40 min	40 min	45 min	60 min	-60%

\* Only 2.5 Ah - 8.0 Ah batteries can be charged with 6 A. Batteries of lower capacity are charged with a lower current. \*\* Only 5.2 Ah - 8.0 Ah batteries can be charged with 8 A. Batteries of lower capacity are charged with a lower current.

# EINHELL IS Official Home & Garden Expert Of FC Bayern!

- Finhell

CORDLESS EXCELLENCE





Official Home & Garden Expert



Cinh al

# ERDEN 2025

© 2025 Einhell Germany AG – Subject to change without notice. E&OE. – Art. No. 110184 / 06 – As of 04.202